

About TRICORE

Established : Aug, 1985

Employee : 2,250 persons

Headquarter : Taichung City, Taiwan

China Plant A : Guangdong, 24,000 m²

China Plant B : Guangdong, 67,000 m²

TRICORE ensures to provide customers with high quality and excellent performing products while producing diverse manufactures. Dedicating ourselves in offering custom-made services to meet customers' demands, over 3,000 customized models of our products have been exported to over fifty countries around the world to serve in industries such as medical, automobile, surveillance, RC, IT, digital camera, and security in the past three decades.

To meet different developing requirements, TRICORE established Two R&D centers in Taiwan and China. Our R&D team consists of well trained professionals who possess the practical experiences in their specialized fields that allow them to pursue excellence in innovating technology. TRICORE has obtained a wide range of patents, which has allowed us to keep the key know-how to become one of the world's leading companies in the core components manufacturing industry.



Customized Services

TRICORE is one of the leading companies in micro motors and modules. With 35 years of experience of making a wide range of products. We provide customized products with a high level of vertical integration from designing to manufacturing. The fast service for every step of the way is our promise to customers. To ensure quality control, up to 85% of the parts are made in-house. This strategy also benefits and adds value by shortening the lead time to our customers.

TRICORE products have a high reputation in markets such as the automotive, digital camera, health-care, and security system. We've been providing more than 5,000 of our products to over 1,000 customers around the world, including many international and well-known companies.

Consisting of well-trained mechanical and software engineers, TRICORE's PE team is able to develop customized testers to meet the different requirements from customers, and to build in-house production lines. Currently TRICORE is able to deliver over 160 million units of products annually, and our production capacity is continuously growing.




Content

Technology	005
Catalog Key	012
Brush Motor	015
Carbon Brush	
Metal Brush	
Stepping Motor	025
Axis	
Bracket	
Gear	
Leadscrew	
Metal Gearbox	
Plastic Gearbox	
Gear Motor	037
Metal Gearbox	
Plastic Gearbox	
Coreless Motor	051
Carbon Brush	
Metal Brush	
Brushless Motor	061
Inner Type	
Outer Type	
Pump & Valve	071
Water Type	
Air Type	
Optical Module	081
IRIS	
IR-CUT	
Shutter	
Automotive Module	093
TRICORE Innovation	101
Quality Assurance	109

Technical Ability

The micro motors TRICORE develops, strive to achieve high performance levels, quiet technology, miniaturization, and a life-span of products. TRICORE's motors have been characterized as high-precision measurement and analysis equipment. This has allowed TRICORE to play a leading role in many motor industries and become conducive to future analyses and improvement on motor-related products.

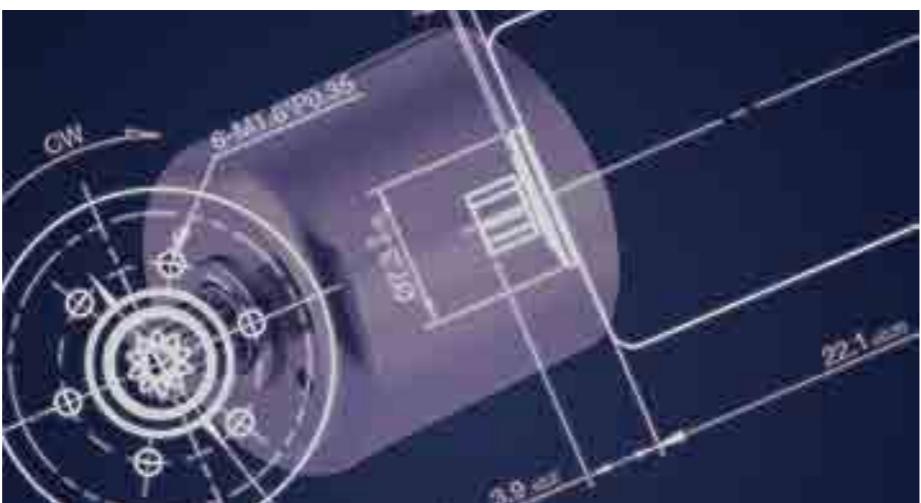


From product conceptualizing, designing, group distributing, testing, and producing, TRICORE has accumulated a wealth of technical experience. With a professional R&D group, we are able to popularize our products into markets within a short period of time. We try our best in administrating and monitoring everything such as our product structures, production processes, and materials to pursue perfection to meet the customer's demands.

TRICORE has been and is dedicated in developing technical production services on shutter modules. Up till now, the structure of shutters has built a solid foundation for performance improvement. In 2008, in accordance to the trend in extended development of molds, TRICORE concentrated on the development of shutter design and committed to uphold the rapid response with low power consumption, and minuscule sizes. We regard low noise while maintaining high quality as a starting point for innovation in our products which have been approved through a number of new forms of applications for patents in Japan, USA and other countries.

Motor Assembly Drawing

To make sure we are producing the best motors we can, 80% of the components in our motors are made by TRICORE itself, which also ensures customers that they are getting the best they can get from us. This also allows flexibility in customizations if needed and allows the customer make specific requests. Within the over 5,000 products we have, 60% of them are customizable. Having automatic machines also brings up the product quality as it maintains better stability, accuracy, and control.

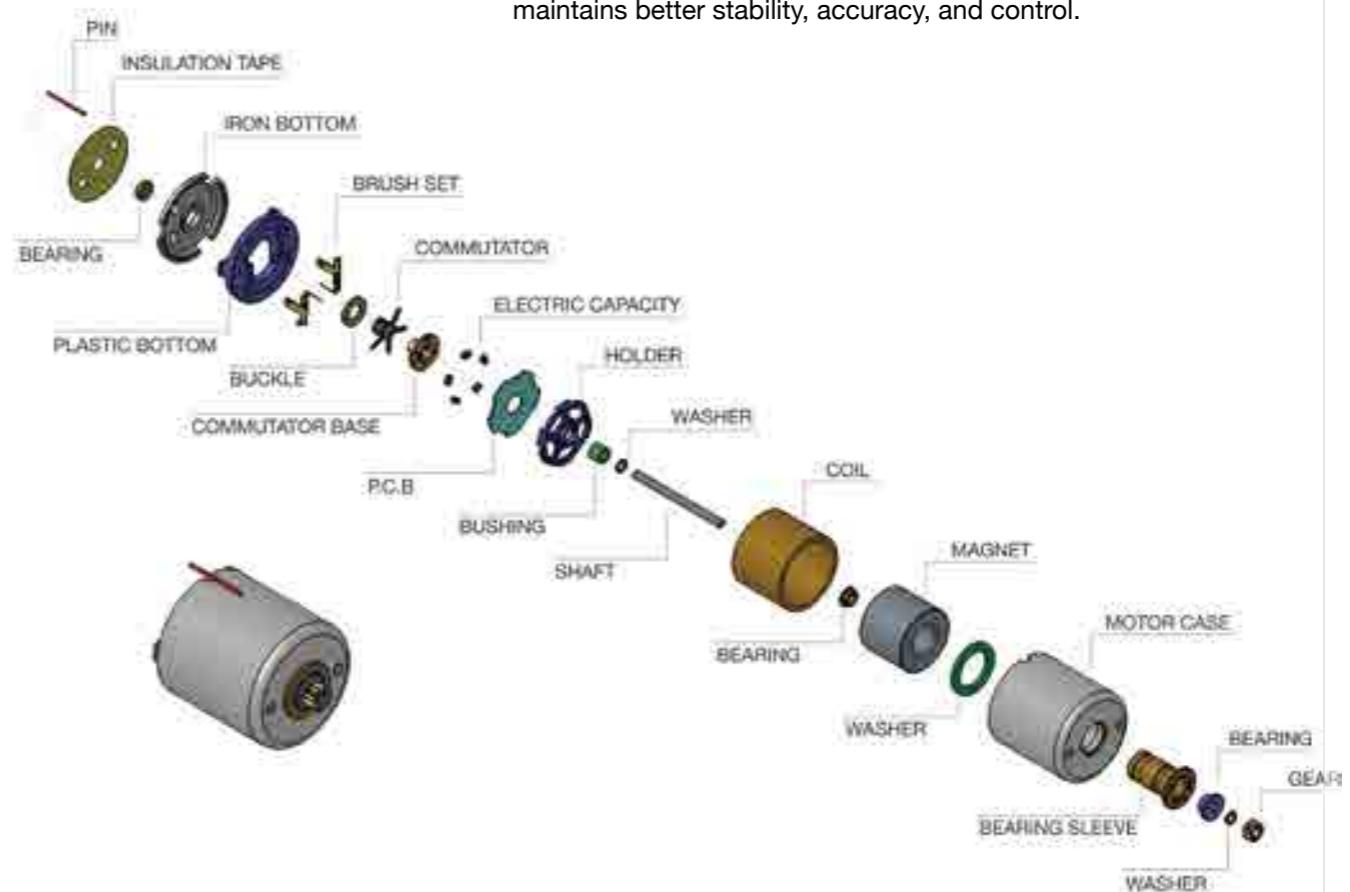

Technology

Motor

A motor is a mechanism that converts one form of energy into mechanical energy. This process is shown below in Figure 1. The main parameters of a motor are voltage (V), current (I), rotational speed (N) and torque (T). The motor quality can be expressed as percentage efficiency (η).


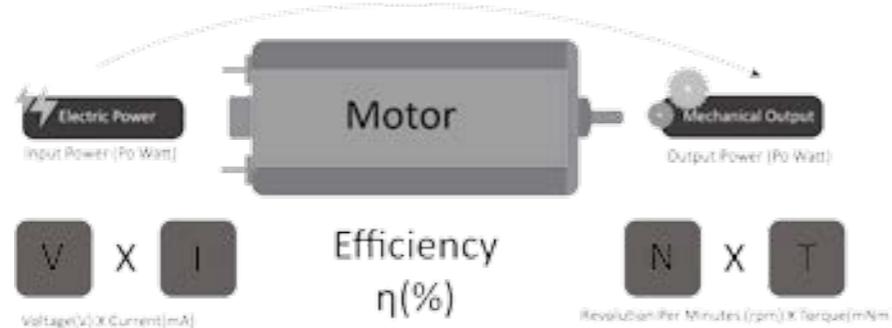


Figure 1. A motor converting electric power into mechanical power.

Motor Characteristic Curve Explanation

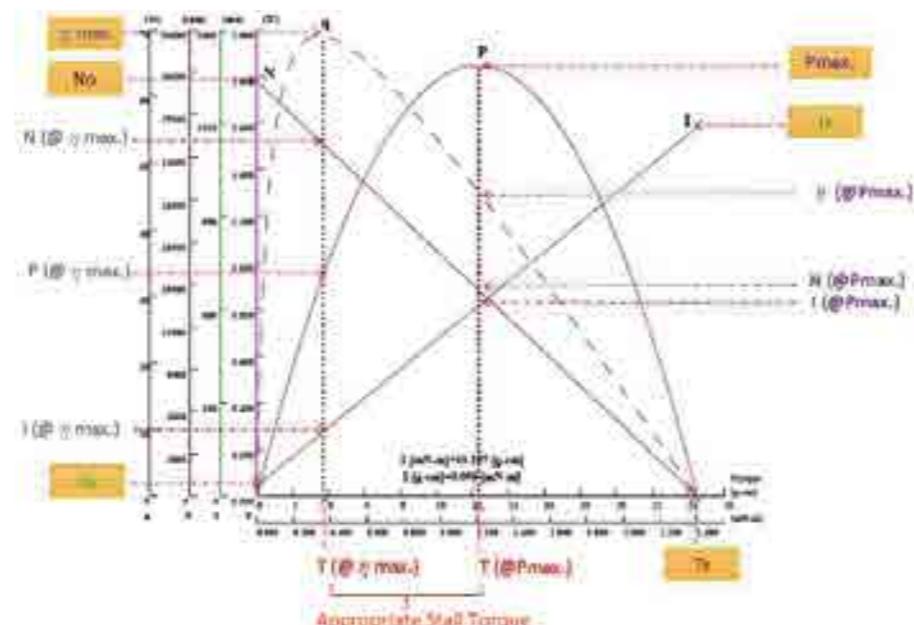

General Data

	Unit	Symbol	Definition	Testing Method
Terminal Resistance	Ω (Ohm)	R	The electric resistance at room temperature across a brush, a commutator or a coiled wire connection.	Ohmmeter
Nominal Voltage	V	V	The DC voltage supplied to the motor while testing for all the other characteristics.	Voltmeter
No Load Speed	RPM	N_0	The speed of an unloaded motor at the nominal voltage.	Tachometer Oscilloscope
No Load Current	mA	I_0	The typical current of an unloaded motor at the nominal voltage.	Ammeter
Stall Torque	mNm	T_s	The torque produced by a stalled motor at the nominal voltage.	Torque meter Calculation formula
Stall Current	A	I_s	The current of a stalled motor at the nominal voltage.	Ammeter Calculation formula
Rated Torque	mNm	T_a	The motor's continuous torque that it can output at rated speed	Utilising: A specific value Customer determined loaded value.
Rated Speed	RPM	N_a	The speed of a loaded motor at the rated voltage.	Tachometer
Rated Current	mA	I_a	The current of a loaded motor at the rated voltage.	Ammeter
Input Power	Watt	P_i	The electric power input to the motor.	Calculation formula
Output Power	Watt	P_o	The electric power output by the motor.	Calculation formula
Max. Output Power	Watt	P_{max}	The maximum power output by the motor at the nominal voltage.	Calculation formula
Max. Efficiency	%	η_{max}	The ratio of the maximum input power to . Specific value of max.input power and max mechanism power	Calculation formula
Back emf Constant	mV/RPM	KE	The ratio of the motor's generated voltage to the speed of the motor's rotation.	Calculation formula
Constant Torque	mNm/A	KT	The ratio of torque delivered by the motor to the current supplied by it.	Calculation formula


Technology

ICR Driving (Design) Principle

Calculation Method Explanation

1. **Terminal Resistance (R)**
Unit : Ω
Formula : $R = V/I_s$
2. **Input Power (P_i)**
Unit: Watt
Formula : $P_i = V \times I$ (I unit : A)
3. **Output Power (P_o)**
Unit: Watt
Formula : $P_o = (1/9550) \times T \times N$ (T unit: mNm)
 $= (1/97500) \times T \times N$ (T unit: g-cm)
4. **Max. Output Power (P_{max})**
Unit : Watt
Formula : $P_{max} = (R/4) / (V/R - I_o/1000)^2$
5. **Efficiency (η)**
Unit : %
Formula : $\eta = (P_o / P_i) \times 100\%$
6. **Max. Output**
Unit : %
Formula : $\eta_{max} = (1 - (I_o \times R / V))^2$
7. **No-load Speed (N_o)**
Unit: RPM
Formula : $N_o = (V \cdot I_o \times R) / KE$
8. **Stall Torque (T_s)**
Unit : mNm
Formula : $T_s = (I_s \cdot I_o) \times KT$
9. **Back emf Constant (KE)**
Unit : mV /RPM
Formula : $KE = (2 \times \pi / 60) \times KT$

IR-CUT Component Assembling

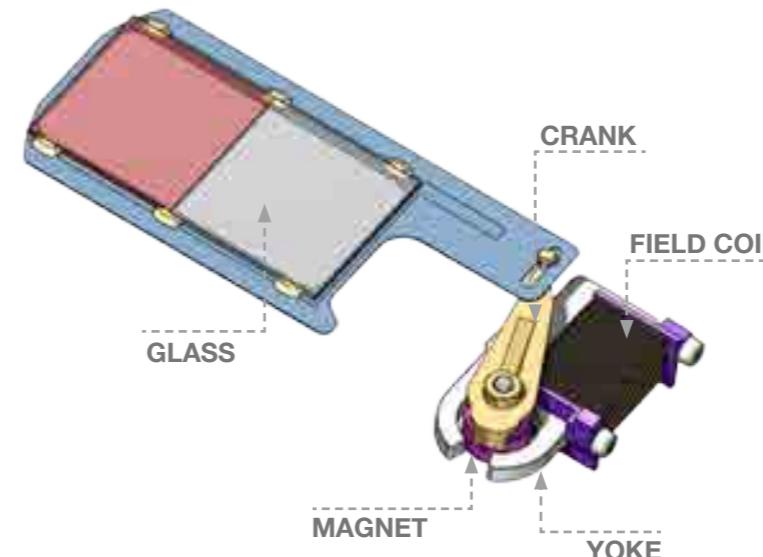



IR-CUT Driving Principle

When the coil is powered on, the magnetic field across the coil will cause the magnet to interact with the other magnetic component (yoke). This will cause the rotor magnet stay in place or keep the torque in static. When the coil is powered on, the magnetic field across the coil will cause the magnet to interact with the other magnetic component (yoke) and cause the magnet to drive the rotor. This then causes the crank to swing the same amount and the filter on shutter will move over covering the lens.

Magneto-Static Field

Magnet and conductive magnet interaction

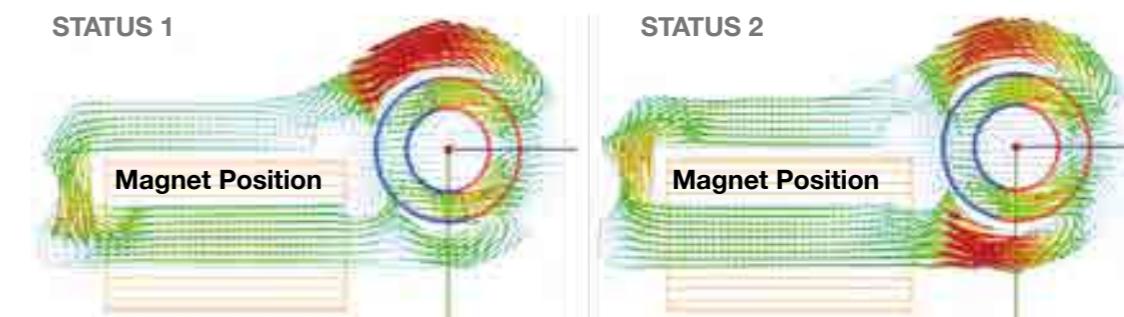

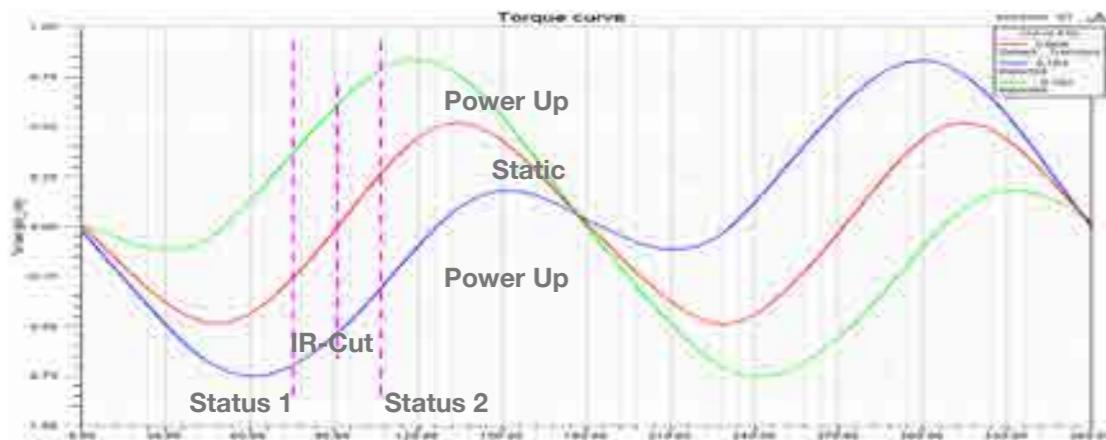

IRIS Driving (Design) Principle

Theory:


An Iris has 2 coils. One is a driving coil, and the other one is a damping coil.

A-B: The driving coil is powered up.

B-C: The driving coil and the damping coil are controlled by PWM to open the blades of the aperture.

C-D: Fully open.


F-G: The driving coil and the damping coil are controlled by PWM to close the blades.

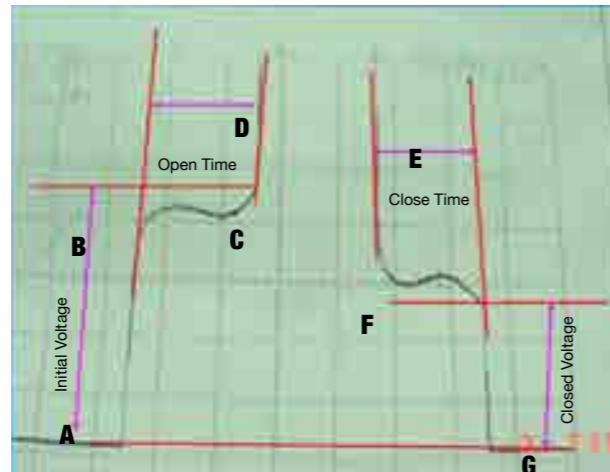

Ripple

Due to the rough surfaces between the blades, the higher surface friction produces the ripple seen on the graph, which can also be observed on an oscilloscope.

Furthermore, these ripples can be reduced by lowering the friction between the blades.

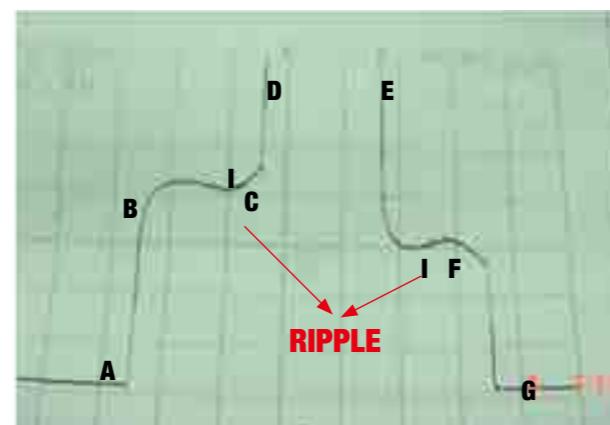

Catalog Key

#1 Sale Type | 1= Bonding
| 2= Non-Bonding

#2 Primary Category | 1= Finished product
| 2= Semi-Finished Product



DC MOTOR

#3	#4	#5	#6-7	#8-9	#10-12
Type	Code	Type	Code	Type	
Brush	B	Round	R	Axial	A
Carbon Brush	C	Flat	F	Tray	T
		Coreless	C	Waving	W
		Vibrating	V	Pinion Gear	G
		Pump Motor	P	Metal Gear Box	M
		Coreless with Encoder	E	Plastic Gear Box	P
		Others	O		



BRUSHLESS MOTOR

#3	#4	#5	#6-7	#8-9	#10-12
Type	Code	Type	Code	Type	
Inner	I	With Hall Sensor and Slot	G	Axial	A
Outer	O	Hall Sensor	H	Tray	T
		Without Hall Sensor and Slot	N	Ring	R
		Slot	M	Metal Gear Box	M
		Pump	P	Plastic Gear Box	P
		Hydroelectric Power	W	Pinion Gear	G
				Turn table	T
				Others	O

Catalog Key



STEPPING MOTOR

#3	#4	#5		#6-7		#8-9		#10-12	
Type	Code	Type	Code	Type	Code				
Stepping Motor	S	Round	R	Axial	A				
		Flat	F	Bracket	B				
				Pinion Gear	G				
				Leadscrew	L	Diameter	##	Length	##
				Metal Gear Box	M				Serial Number
				Plastic Gear Box	P				##
				Others	O				



GEAR MOTOR

#3	#4	#5		#6-7		#8-9		#10-12	
Type	Code	Type	Code	Type	Code				
Gear Box	H	Medical Industry	M	Planetary	P	Reduction Ratio	##	-	##
		Optical Industry	O	Spur	T				
		Others	Q	Others	A				



PUMP MOTOR

#3	#4		#5		#6-7		#8-9		#10-12	
Type	Code	Type	Code	Type	Code					
-	T	Pump	P	Air	M					
				Solenoid	T	Diameter	##	Length	##	Serial Number
				Vacuum	V					##
				Water	W					
	Valve	V	Open	O				00		
			Close	C	No. of Valve Way	##	00	00	Serial Number	##
			Water	W				00		

Catalog Key



OPTICAL

#3		#4		#5		#6-7		#8-9		#10-12	
Type	Code	Type	Code	Type	Code						
Part	P	Solenoid	S	Normally Open	N		##		00		
				Others	O		##		00		
				Normally Colse	C	Length	##	00	00		
				Rotation	R		##		00		
				With Sensor	I		##		00		
Assembly	A	Shutter	H	Focal Plane	M	Aperture	##		00		
				Blade	B	Diameter	##	00	00	Serial Number	###
		Aperture	O	With IR-Cut	F	Diameter	##		00		
				Without IR-Cut	N		##	00	00		
		Brake	B	-	G	Max. Size of Appearance	##	00	00		
		IR-Cut	D	-	F	Aperture Diameter	##	00	00		
		Vibration Reduction	V	-	R	Max. Length of Magnet	##	00	00		



AUTOMOTIVE

#3	#4		#5		#6-7		#8-9		#10-12	
Type	Code	Type	Code	Type	Code					
Auto	A	Headlight	F	System	S	CW	10	IC	01	
		Switch	S			CCW	20		02	Serial Number
						Outer Control	30		03	
									04	

BRUSH MOTOR




DC BRUSH MOTOR | Ø15

Carbon Brush



unit	CFA1518001	CFG1518003	CFG1518006				
	Axial	Pinion Gear	Pinion Gear				
Standard Operating Conditions							
Nominal Voltage V	11.0	6.0	8.5				
Operating Range V	8.0~16.0	4.0~7.0	5.3~8.5				
Rated Load mNm	0.421	0.49	0.49				
Direction of Rotation	CW & CCW	CW & CCW	CW & CCW				
Operating Temperature Range °C	-10~+60	-10~+60	-10~+60				
Storage Temperature Range °C	-40~+85	-30~+85	-30~+85				
Electrical Characteristic							
No-Load Current mA	70	150	180				
No-Load Speed rpm	10400	16500	29000				
Rated-Load Current mA	200	500	500				
Rated-Load Speed rpm	7600	15900	27000				
Stall Torque mNm	1.176	3.43	3.43				
Max. Starting Voltage V	3.6	1.5	1.2				
Max. Starting Current mA	350	3000	4000				
Rotor Resistance Ω	52	3.8	2.5				
Output Power W	0.33	0.815	1.38				
Insulation Resistance Mohm	1.0	1.0	1.0				
Weight of Motor g	10.3	10.6	11				

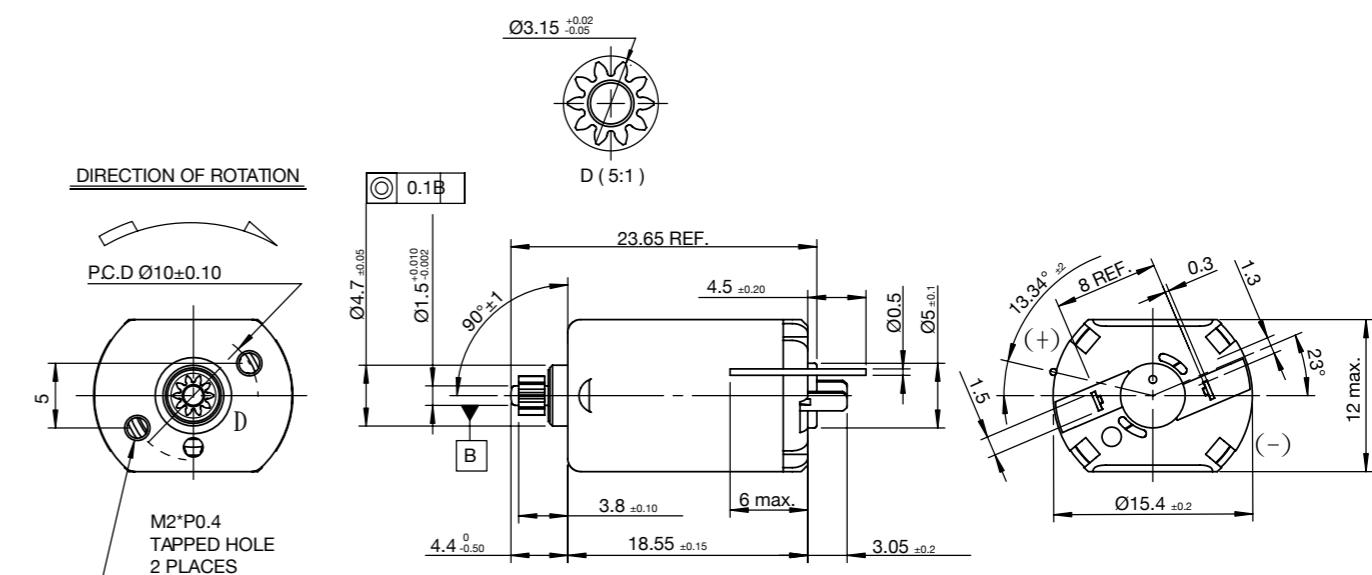


17 DC BRUSH MOTOR | Ø20

Carbon Brush

unit	CFA2024003	CFG2025008	CFG2025009				
	Axial	Pinion Gear	Pinion Gear				
Standard Operating Conditions							
Nominal Voltage V	12.0	22.8	12.0				
Operating Range V	10.0~16.0	10.0~24.0	10.0~14.0				
Rated Load mNm	0.98	1.98	2.45				
Direction of Rotation	CW&CCW	CW&CCW	CW&CCW				
Operating Temperature Range °C	-30~+85	0~+50	-40~+105				
Storage Temperature Range °C	-40~+105	-20~70	-40~+120				

Electrical Characteristic							
No-Load Current mA	60	80	70				
No-Load Speed rpm	7500	14400	9500				
Rated-Load Current mA	140	230	350				
Rated-Load Speed rpm	6400	12300	6300				
Stall Torque mNm	5.4	9.3	5.4				
Max. Starting Voltage V	-	-	-				
Max. Starting Current mA	700	1500	900				
Rotor Resistance Ω							
Output Power W	0.656	2.54	1.61				
Insulation Resistance Mohm	1.0	1.0	1.0				
Weight of Motor g	22.5	23.2	24				

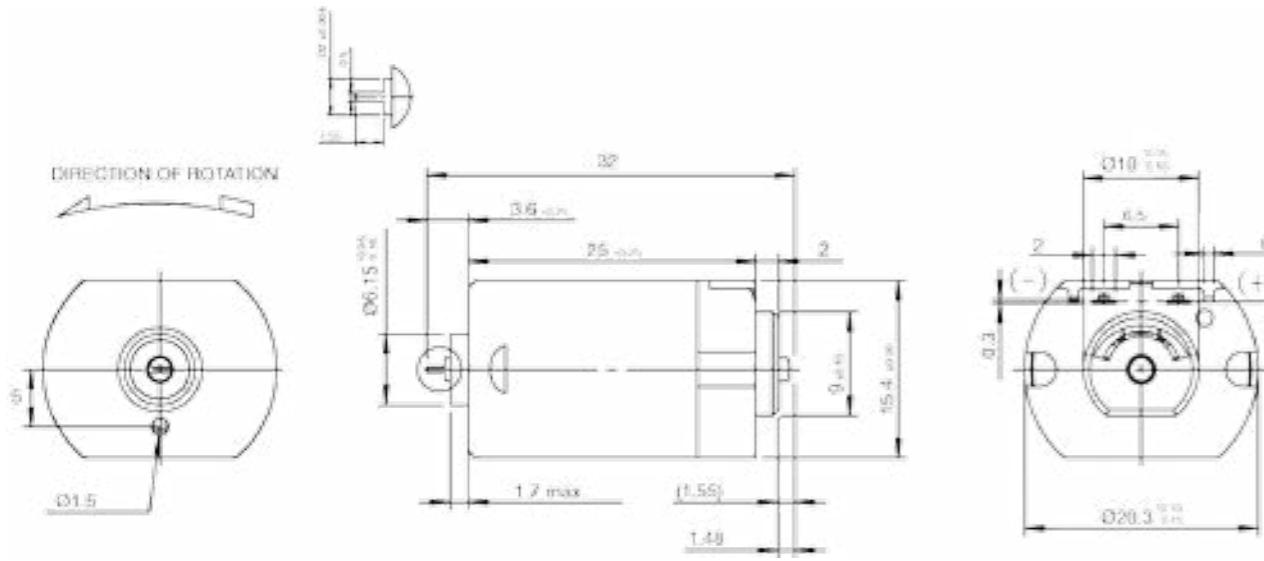


18 DC BRUSH MOTOR | Ø24

Carbon Brush

unit	CFA2426001	CFA2426003	CFA2430004				
	Axial	Axial	Axial				
Standard Operating Conditions							
Nominal Voltage V	12.0	2.4	12.0				
Operating Range V	8.0~15.0	1.0~4.0	8.0~15.0				
Rated Load mNm	1.96	1.96	2.45				
Direction of Rotation	CW&CCW	CW&CCW	CW&CCW				
Operating Temperature Range °C	-10~+60	-10~+60	-10~+60				
Storage Temperature Range °C	-30~+85	-30~+85	-30~+85				

Electrical Characteristic							
No-Load Current mA	60	330	80				
No-Load Speed rpm	5700	9000	9200				
Rated-Load Current mA	180	1250	330				
Rated-Load Speed rpm	4100	7600	8250				
Stall Torque mNm	4.905	9.81	17.658				
Max. Starting Voltage V	1.8	1.0	1.0				
Max. Starting Current mA	510	10000	2700				
Rotor Resistance Ω	25.5	0.25	4.1				
Output Power W	0.841	1.559	2.11				
Insulation Resistance Mohm	1.0	1.0	1.0				
Weight of Motor g	30.8	33	40				

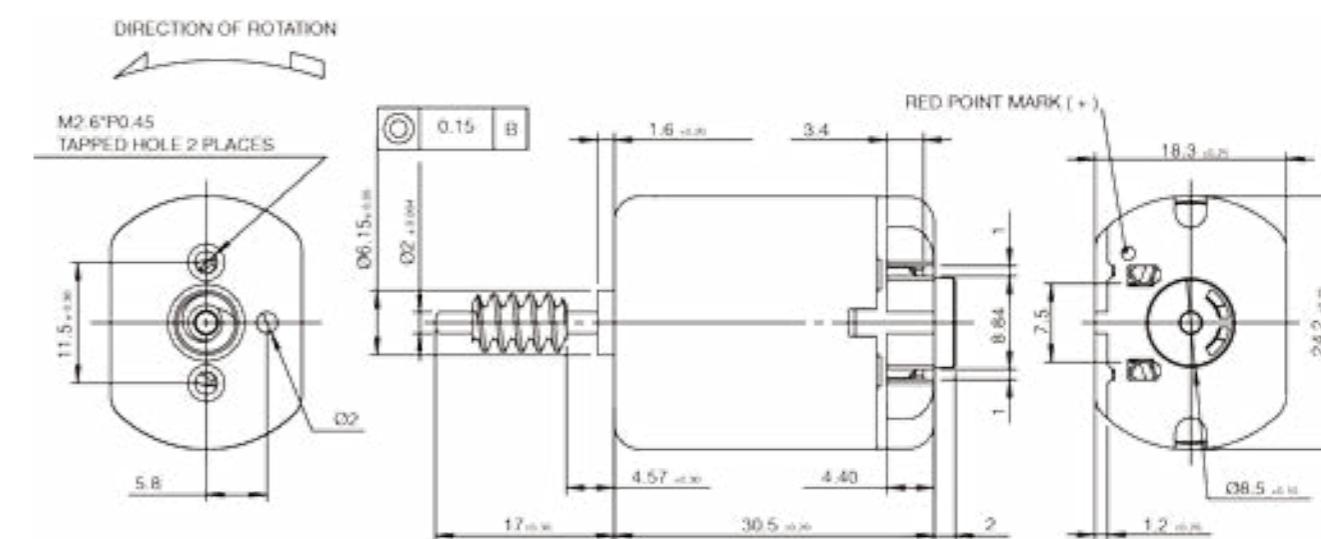


19 DC BRUSH MOTOR | Ø08

Metal Brush

unit	BFA0810001	BFA0814006	BFA0820001			
	Axial	Axial	Axial			
Standard Operating Conditions						
Nominal Voltage V	3.0	1.0	3.0			
Operating Range V	1.8~3.8	1.0~3.5	1.5~3.5			
Rated Load mNm	0.04	0.04	0.098			
Direction of Rotation	CW&CCW	CW&CCW	CW&CCW			
Operating Temperature Range °C	-20~+70	-20~+80	-10~+70			
Storage Temperature Range °C	-40~+85	-40~+85	-40~+85			

Electrical Characteristic						
No-Load Current mA	95	45	65			
No-Load Speed rpm	27000	5900	14200			
Rated-Load Current mA	130	90	170			
Rated-Load Speed rpm	24000	4300	10600			
Stall Torque mNm	0.29	0.12	0.411			
Max. Starting Voltage V	1.4	0.8	0.8			
Max. Starting Current mA	450	300	460			
Rotor Resistance Ω	8.6	5.7	9.0			
Output Power W	0.1	0.018	0.108			
Insulation Resistance Mohm	1.0	1.0	1.0			
Weight of Motor g	1.6	2.5	3.8			

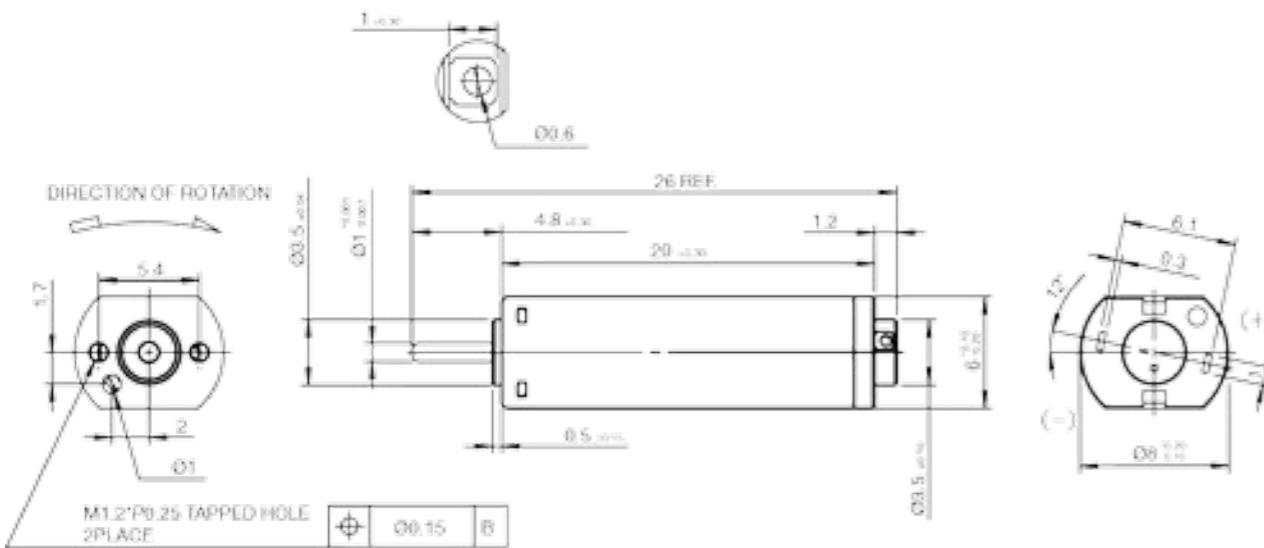


20 DC BRUSH MOTOR | Ø10

Metal Brush

unit	BFA1011012	BFA1015001	BFA1020001			
	Axial	Axial	Axial			
Standard Operating Conditions						
Nominal Voltage V	4.0	2.4	4.8			
Operating Range V	2.0~6.0	2.2~3.5	1.5~5.5			
Rated Load mNm	0.147	0.245	0.279			
Direction of Rotation	CW&CCW	CW&CCW	CW&CCW			
Operating Temperature Range °C	-10~+70	-20~+50	-20~+70			
Storage Temperature Range °C	-40~+80	-30~+85	-30~+85			

Electrical Characteristic						
No-Load Current mA	42	95	50			
No-Load Speed rpm	12500	15800	13000			
Rated-Load Current mA	120	310	160			
Rated-Load Speed rpm	8500	11400	9000			
Stall Torque mNm	0.39	0.59	0.078			
Max. Starting Voltage V	1.5	1.4	1.0			
Max. Starting Current mA	270	1250	350			
Rotor Resistance Ω	17.4	1.90	14.5			
Output Power W	0.13	0.292	0.262			
Insulation Resistance Mohm	1.0	1.0	1.0			
Weight of Motor g	3	4	5			

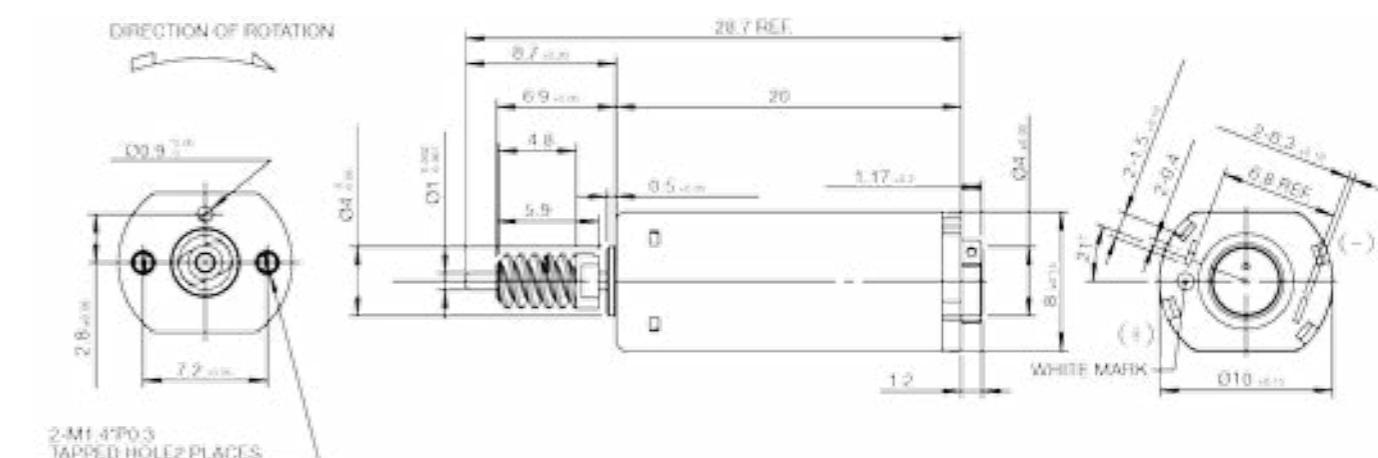


21 DC BRUSH MOTOR I Ø12

Metal Brush

unit	BFA1220030	BFG1215002	Axial	Pinion Gear
Standard Operating Conditions				
Nominal Voltage V	2.5	7.4		
Operating Range V	2.0~5.0	2.0~8.0		
Rated Load mNm	0.196	0.294		
Direction of Rotation	CW&CCW	CW&CCW		
Operating Temperature Range °C	-20~+60	-10~+50		
Storage Temperature Range °C	-30~+70	-30~+80		

Electrical Characteristic				
No-Load Current mA	35	100		
No-Load Speed rpm	5200	25000		
Rated-Load Current mA	85	200		
Rated-Load Speed rpm	3950	21000		
Stall Torque mNm	0.78	1.47		
Max. Starting Voltage V	1.0	1.0		
Max. Starting Current mA	300	110		
Rotor Resistance Ω	9.8	7.7		
Output Power W	0.081	0.628		
Insulation Resistance Mohm	1.0	1.0		
Weight of Motor g	7.8	5.2		

DIRECTION OF ROTATION

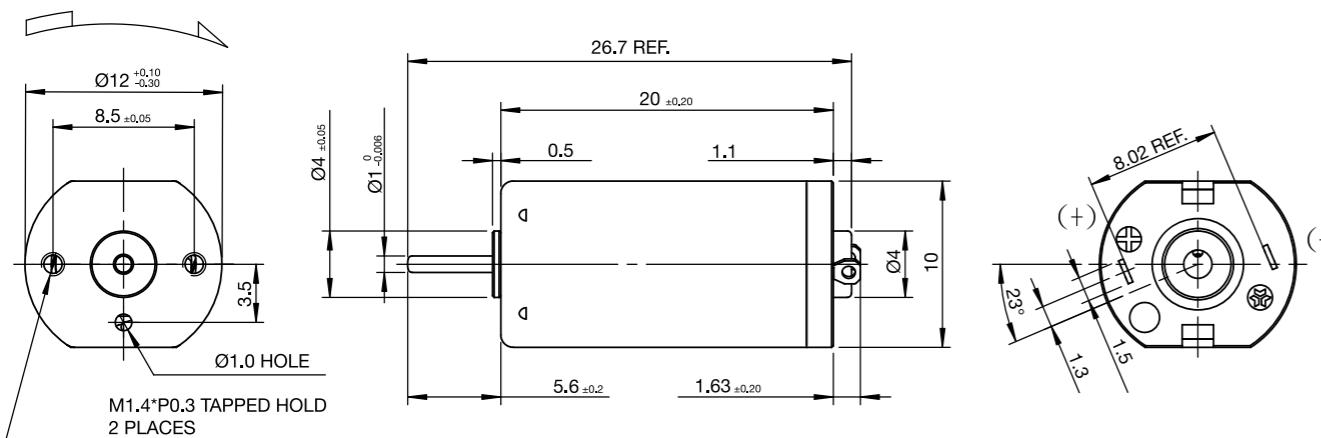


22 DC BRUSH MOTOR I Ø14

Metal Brush

unit	BFA1420003	Axial
Standard Operating Conditions		
Nominal Voltage V	6.0	
Operating Range V	4.0~7.2	
Rated Load mNm	0.88	
Direction of Rotation	CW&CCW	
Operating Temperature Range °C	-20~+50	
Storage Temperature Range °C	-30~+70	

Electrical Characteristic		
No-Load Current mA	80	
No-Load Speed rpm	15800	
Rated-Load Current mA	365	
Rated-Load Speed rpm	11700	
Stall Torque mNm	3.03	
Max. Starting Voltage V	-	
Max. Starting Current mA	1365	
Rotor Resistance Ω	4.6	
Output Power W	1.07	
Insulation Resistance Mohm	1.0	
Weight of Motor g	10.6	

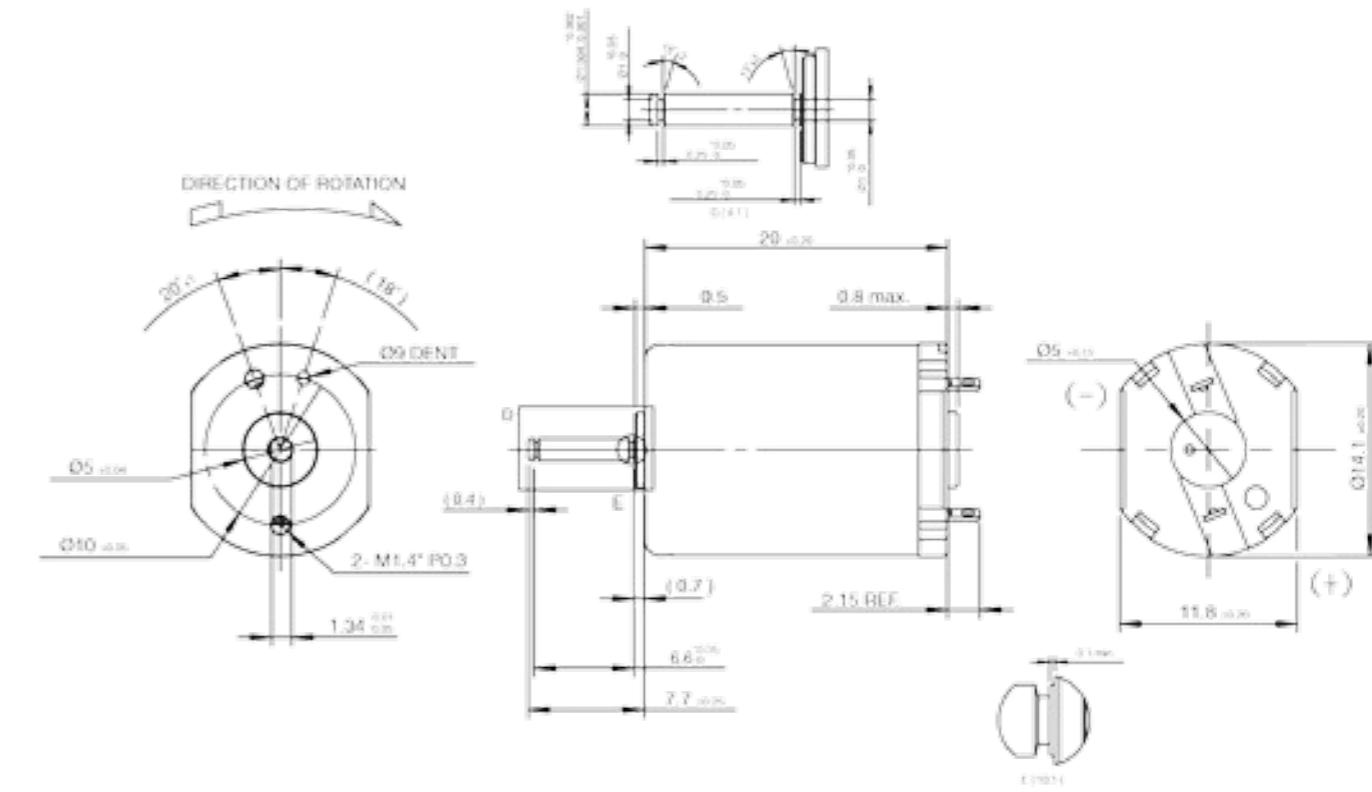


23 DC BRUSH MOTOR I Ø15

Metal Brush

unit	BFA1518008	BFA1526043					
	Axial	Axial					
Standard Operating Conditions							
Nominal Voltage V	6.0	12.0					
Operating Range V	2.5~7.5	14.0~13					
Rated Load mNm	0.49	0.98					
Direction of Rotation	CW&CCW	CW&CCW					
Operating Temperature Range °C	-30~+85	-10~+40					
Storage Temperature Range °C	-40~+90	-20~+60					

Electrical Characteristic							
No-Load Current mA	110	40					
No-Load Speed rpm	1480	9800					
Rated-Load Current mA	300	140					
Rated-Load Speed rpm	11700	7600					
Stall Torque mNm	1.86	3.73					
Max. Starting Voltage V	1.5	1.8					
Max. Starting Current mA	1230	500					
Rotor Resistance Ω	6.7	28					
Output Power W	0.6	0.77					
Insulation Resistance Mohm	1.0	1.0					
Weight of Motor g	10.5	17.5					

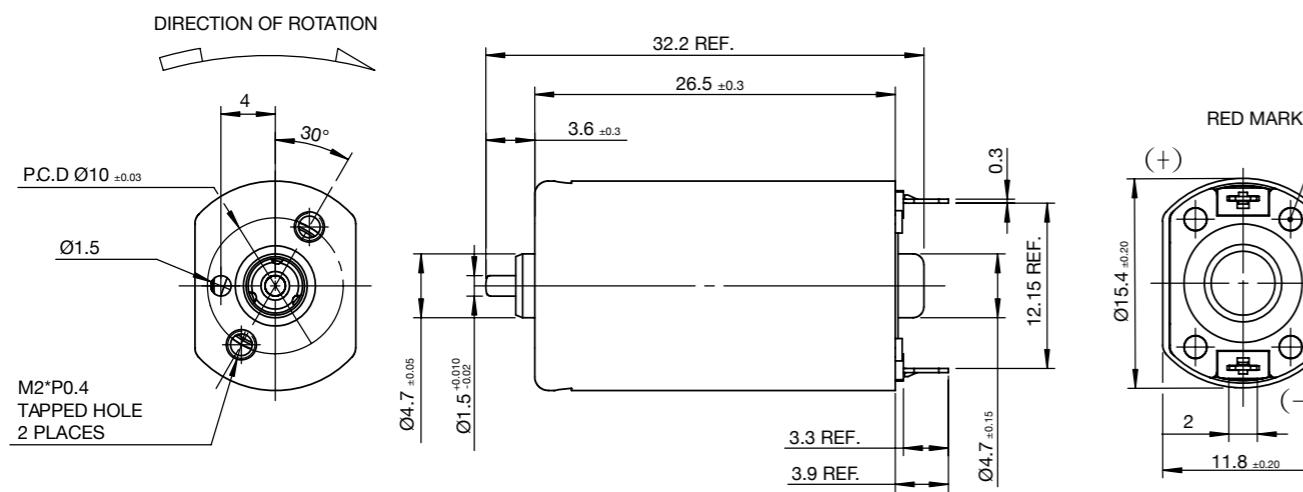



24 DC BRUSH MOTOR I Ø17

Metal Brush

unit	BRA1717012						
Standard Operating Conditions							
Nominal Voltage V	4.5						
Operating Range V	2.0~5.0						
Rated Load mNm	0.196						
Direction of Rotation	CW&CCW						
Operating Temperature Range °C	-20~+70						
Storage Temperature Range °C	-30~+85						

Electrical Characteristic							
No-Load Current mA	110						
No-Load Speed rpm	12500						
Rated-Load Current mA	180						
Rated-Load Speed rpm	11000						
Stall Torque mNm	1.27						
Max. Starting Voltage V	1.0						
Max. Starting Current mA	660						
Rotor Resistance Ω	7.5						
Output Power W	0.25						
Insulation Resistance Mohm	1.0						
Weight of Motor g	15.2						

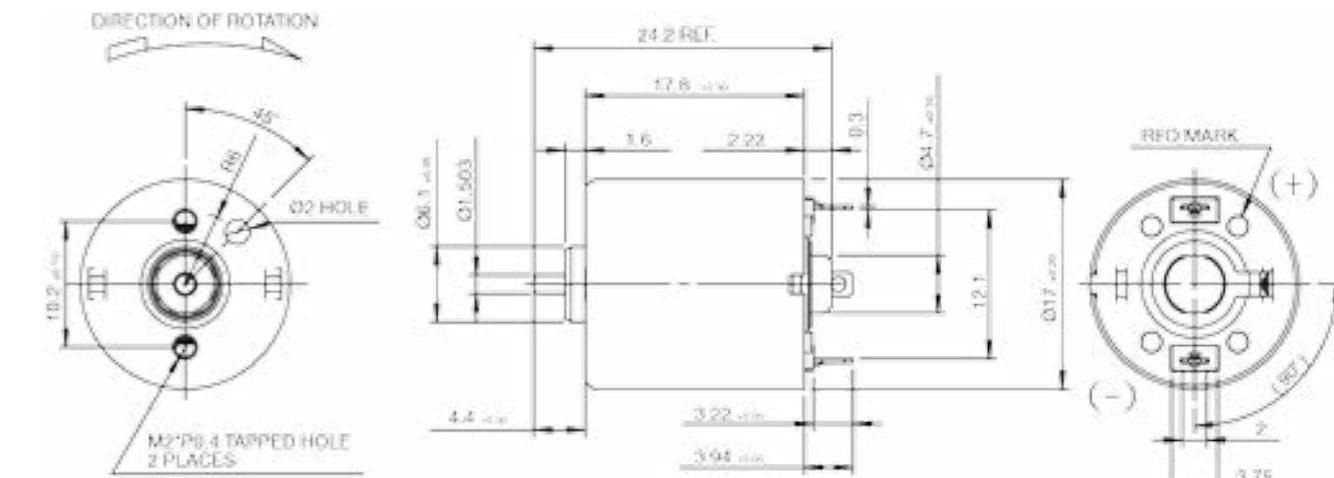

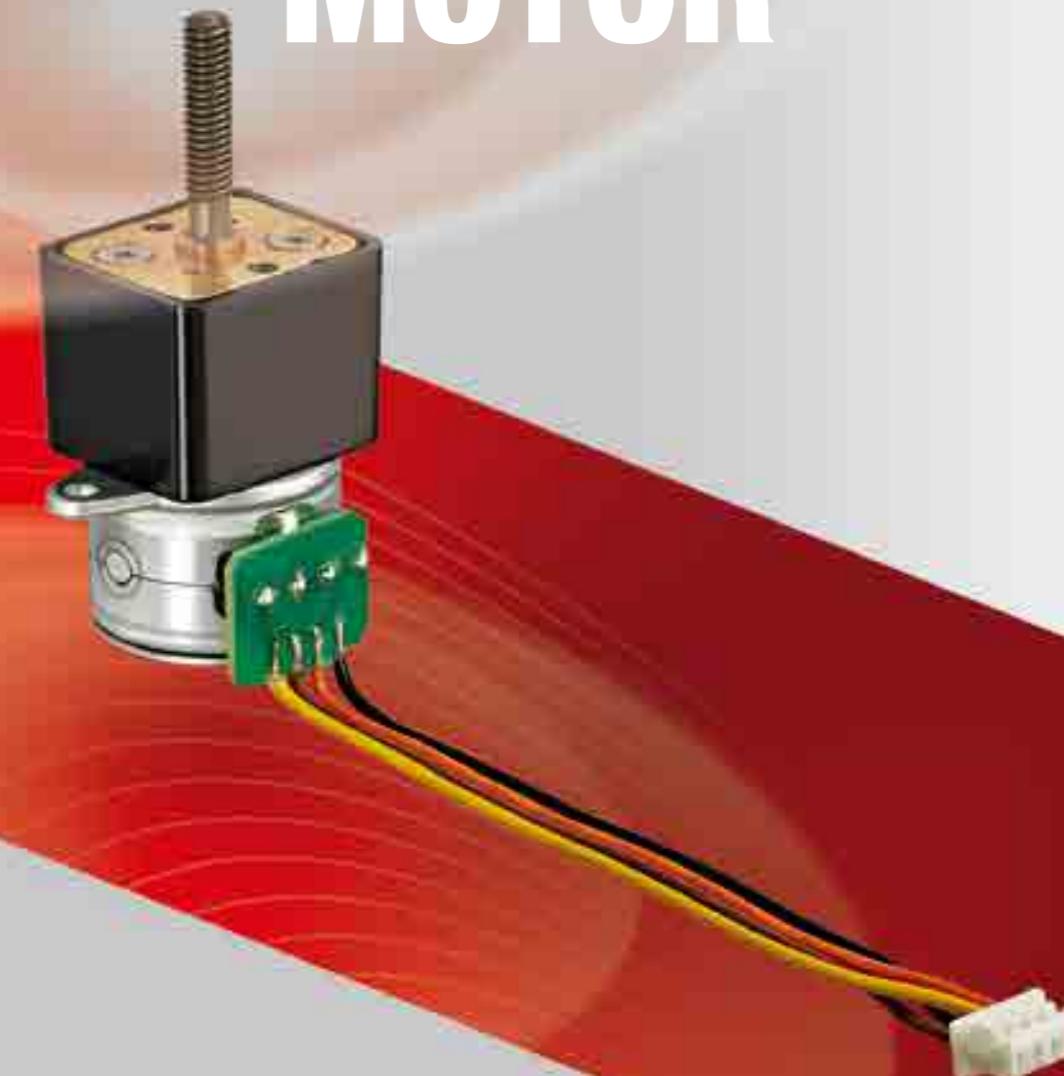


STEPPING MOTOR

STEPPING MOTOR | Ø06
SR SERIES




unit	SRL0603006	SRB0605015	SRG0605027	SRB0607022
	Leadscrew	Bracket	Pinion Gear	Bracket
Electrical Characteristic				
Nominal Voltage V	3.3	4.0	3.3	5.0
Coil Resistance Ω	30	50	30	40
No. of Phases	1-2	2	2	2
Step Angle °/step	9	18	18	9
Excitation Method	1-2	2	2-2	2
Drive Mode	Bi-Polar	Bi-Polar	Bi-Polar	Bi-Polar
Max. Starting Frequency PPS	1800	2000	2000	2500
Max. Stowing Frequency PPS	4000	1100	1200	1500
Insulation Class E	E	E	E	E
Insulation Strength V	100	100	100	100
Insulation Resistance Ω	50M	1M	1M	1M
Operating Temperature Range °C	-20~+70	-10~+60	-40~+80	-10~+60
Operating Frequency				
PPS	1000	600	400	500
Pull-in Torque mNm	0.05	0.12	0.6	-
Pull-out Torque mNm	0.06	-	0.7	-

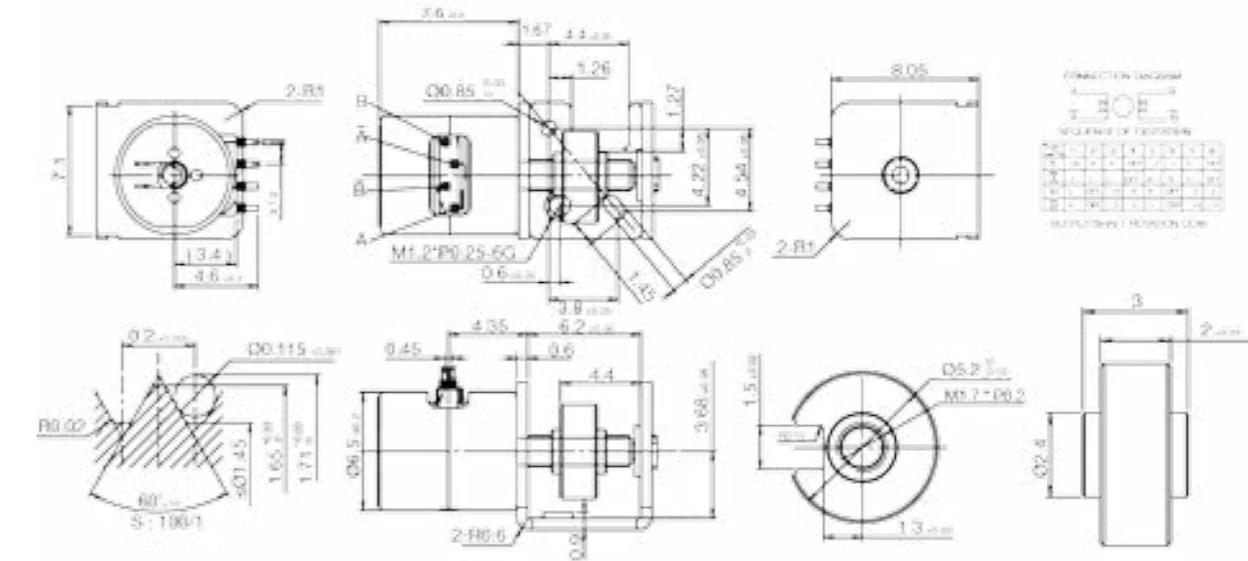


**27 STEPPING MOTOR | Ø08
SR SERIES**




unit	SRG0808023	SRA0808027	SRG0808038	SRB0808055	SRB0808064		
	Pinion Gear	Axial	Pinion Gear	Bracket	Bracket		
Electrical Characteristic							
Nominal Voltage V	3.3	3.3	3.0	3.3	5.0		
Coil Resistance Ω	20	21	40	20	80		
No. of Phases	2	2	2	2	1-2		
Step Angle °/step	18	18	18	18	29		
Excitation Method	2	2	2	2	2		
Drive Mode	Bi-Polar	Bi-Polar	Bi-Polar	Bi-Polar	Bi-Polar		
Max. Starting Frequency PPS	800	800	1000	800	800		
Max. Stewning Frequency PPS	1100	110	1200	2000	1800		
Insulation Class	E	E	E	E	E		
Insulation Strength V	100	100	100	100	100		
Insulation Resistance Ω	1.0M	1.0M	1.0M	1.0M	1.0M		
Operating Temperature Range °C	-30~+80	-40~+60	-30~+80	-40~+70	-10~+60		
Operating Frequency PPS	400	400	800	500	500		
Pull-in Torque mNm	0.21	0.21	0.08	-	0.12		
Pull-out Torque mNm	0.25	0.28	0.12	-	0.20		

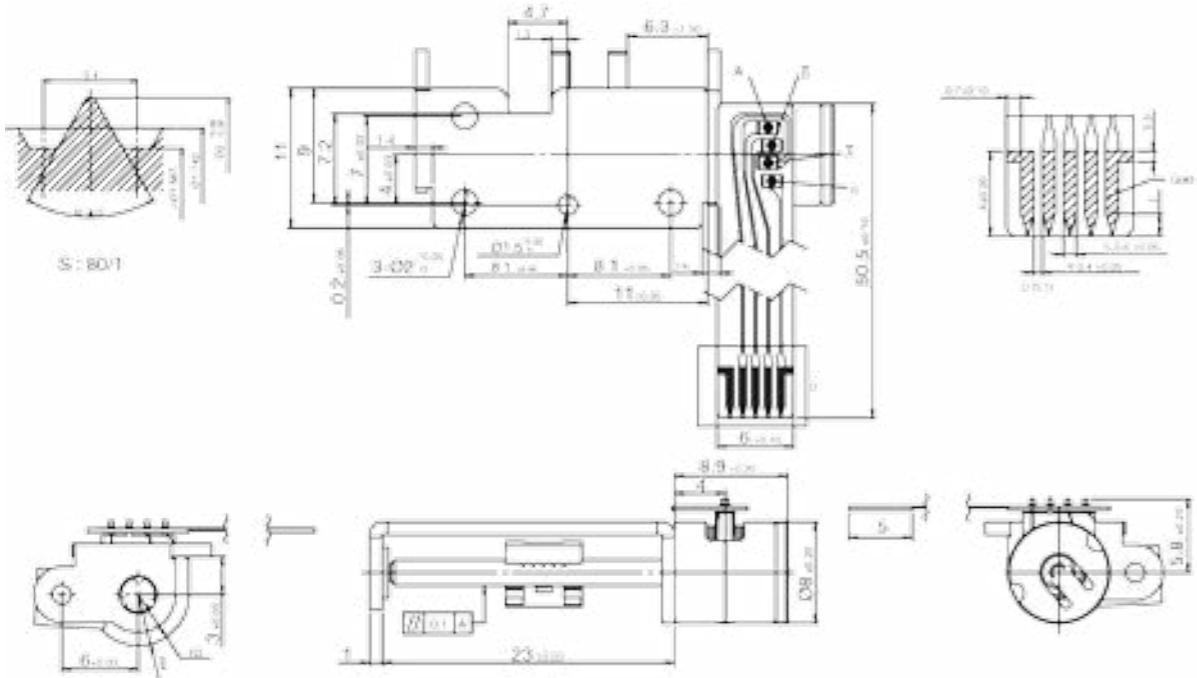

**28 STEPPING MOTOR | Ø10
SR SERIES**




unit	SRA1008004	SRB1008013	SRG1008031	SRA1008048	SRB1008092		
	Axial	Bracket	Pinion Gear	Axial	Bracket		
Electrical Characteristic							
Nominal Voltage V	5.0	5.0	5.0	5.0	4.6		
Coil Resistance Ω	45	55	20	15	40		
No. of Phases	2	2	2	2	2		
Step Angle °/step	18	18	18	18	9		
Excitation Method	2	2	2	2	4W1-2		
Drive Mode	Bi-Polar	Bi-Polar	Bi-Polar	Bi-Polar	Bi-Polar		
Max. Starting Frequency PPS	800	800	1000	1000	1200		
Max. Stewning Frequency PPS	1300	1200	2500	2500	2200		
Insulation Class	E	E	E	E	E		
Insulation Strength V	300	300	100	100	300		
Insulation Resistance Ω	100	50M	1M	1M	50M		
Operating Temperature Range °C	0~50	-10~+70	-10~+60	-10~+60	-20~+80		
Operating Frequency PPS	500	480	500	500	480		
Pull-in Torque mNm	0.40	0.28	0.65	0.75	0.2		
Pull-out Torque mNm	0.42	0.30	-	-	-		

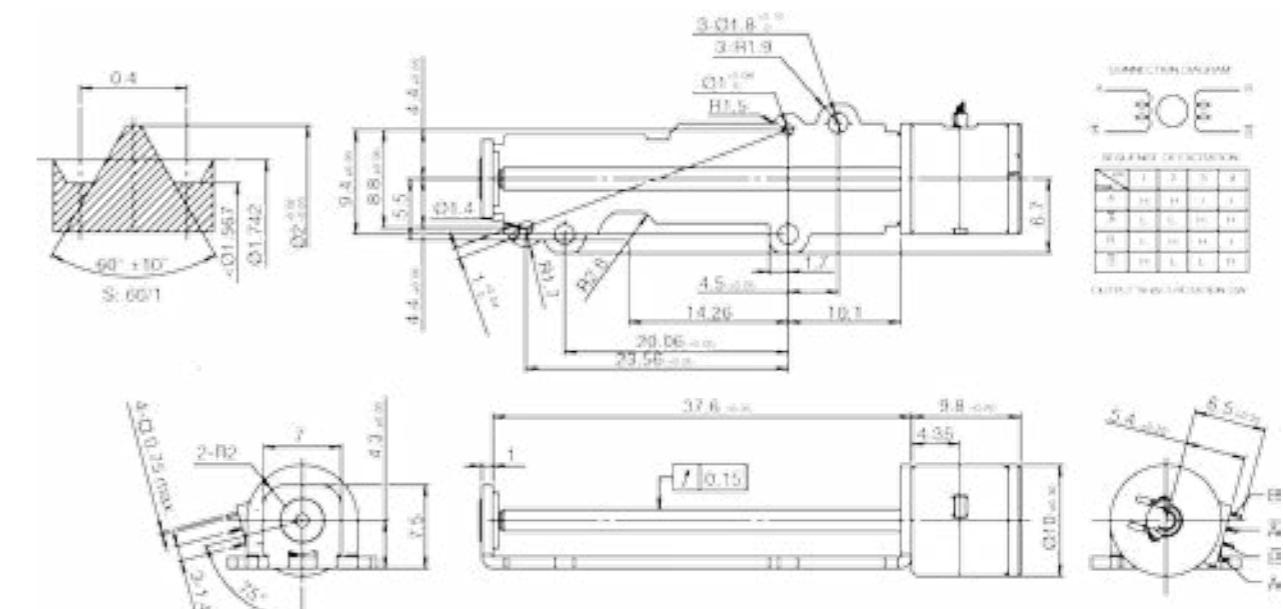


**29 STEPPING MOTOR | Ø15
SR SERIES**




unit	SRB1509004	SRA1509013	SRB1509028	SRG1509030	SRB1509040		
	Bracket	Axial	Bracket	Pinion Gear	Bracket		
Electrical Characteristic							
Nominal Voltage V	4.5	3.3	5.0	5.0	4.5		
Coil Resistance Ω	10	10	10	10	10		
No. of Phases	2	2	2	2	2		
Step Angle °/step	18	18	18	18	18		
Excitation Method	2	2	2	2	2		
Drive Mode	-	-	-	-	-		
Max. Starting Frequency PPS	900	800	800	1100	900		
Max. Stowing Frequency PPS	2000	1200	1500	1800	2000		
Insulation Class E	F	E	F	E			
Insulation Strength V	500	200	200	200	200		
Insulation Resistance Ω	30	100M	100M	100M	30M		
Operating Temperature Range °C	0~+55	-20~+75	-20~+80	-40~+125	0~55		
Operating Frequency PPS	500	500	500	500	500		
Pull-in Torque mNm	1.2	0.6	0.12	0.12	0.15		
Pull-out Torque mNm	1.6	0.9	0.18	0.18	0.16		

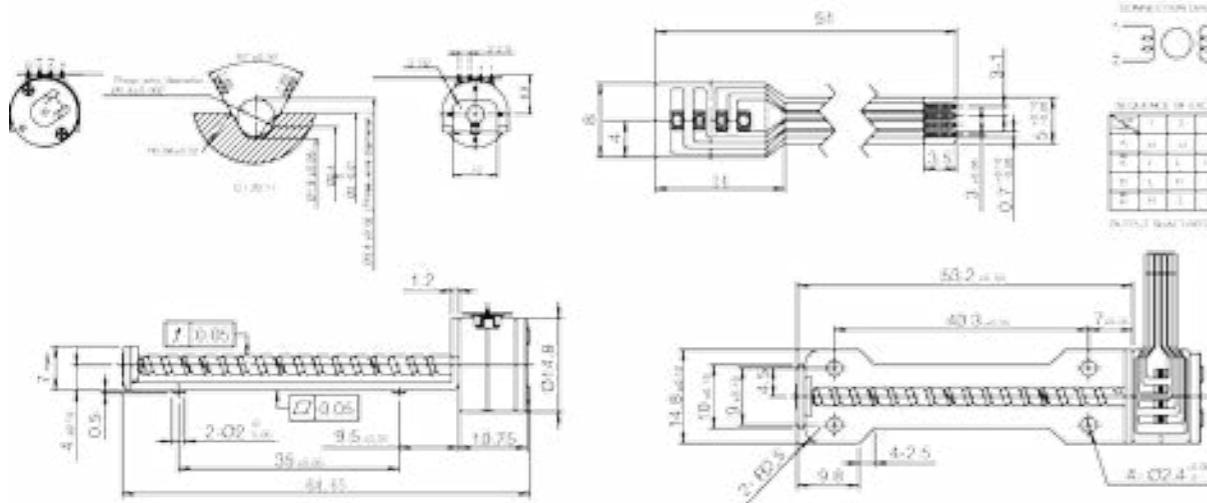

**STEPPING MOTOR | Ø10
Metal Gearbox**

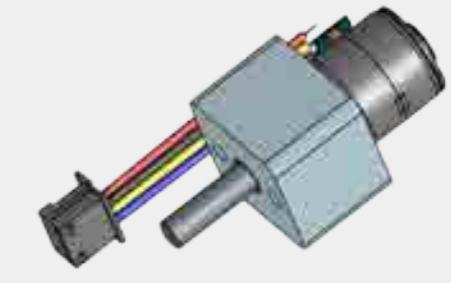

unit	SRM1008003	SRM1008014	SRM1008025	HOT0052001	HQT0204002	HOT0298014	SRM1008011
Dimension mm	Ø10*31.2L	Ø10*19.2L	Ø10*44L	Ø10*19.2L	Ø10*19.5L	Ø10*19.5L	Ø10*19.5L
Electrical Characteristic							
Nominal Voltage V	3.0	-	5.0	5.0	3.3	5.0	5.0
Rated Current mA	-	75	-	-	-	-	-
Operating Range V	-	-	-	-	-	-	-
Coil Resistance Ω	7	50	30	15	20	19	19
No. of Phases	2	2	2				
Step Angle °/step	0.346	1.2	0.06	0.346	0.088	0.06	0.18
Excitation Method	2-2	2-2	2-2	2-2	2-2	2-2	2-2
Drive Mode	Bi-Polar	-	-	Bi-Polar	-	-	-
Operating Temperature Range °C	-10~+60	-30~+85	-20~+75	-10~+60	-10~+60	-10~+70	-10~+70
Storage Temperature °C	-	-40~+105	-	-40~+80	-	-30~+70	-30~+70
Mechanical Specification							
Reduction Ratio	1:52	1:15	1:298	1:52	1:204	1:298	1:100
Output Torque mNm	250	60	1000	250	200	100	300
Max Starting Frequency PPS	000	1280	1000	1000	800	600	600
Max Slewing Frequency PPS	2500	1400	2000	2500	1100	1900	1900
Mechanical Noise dB	-	60	-	60	60	40	60
Power Supply Type							
Type	AC						
FPC	x	x	x	x	x	x	o
Lead Wire	x	o	o	x	o	o	x
Pin Connector	x	o	o	x	o	o	x

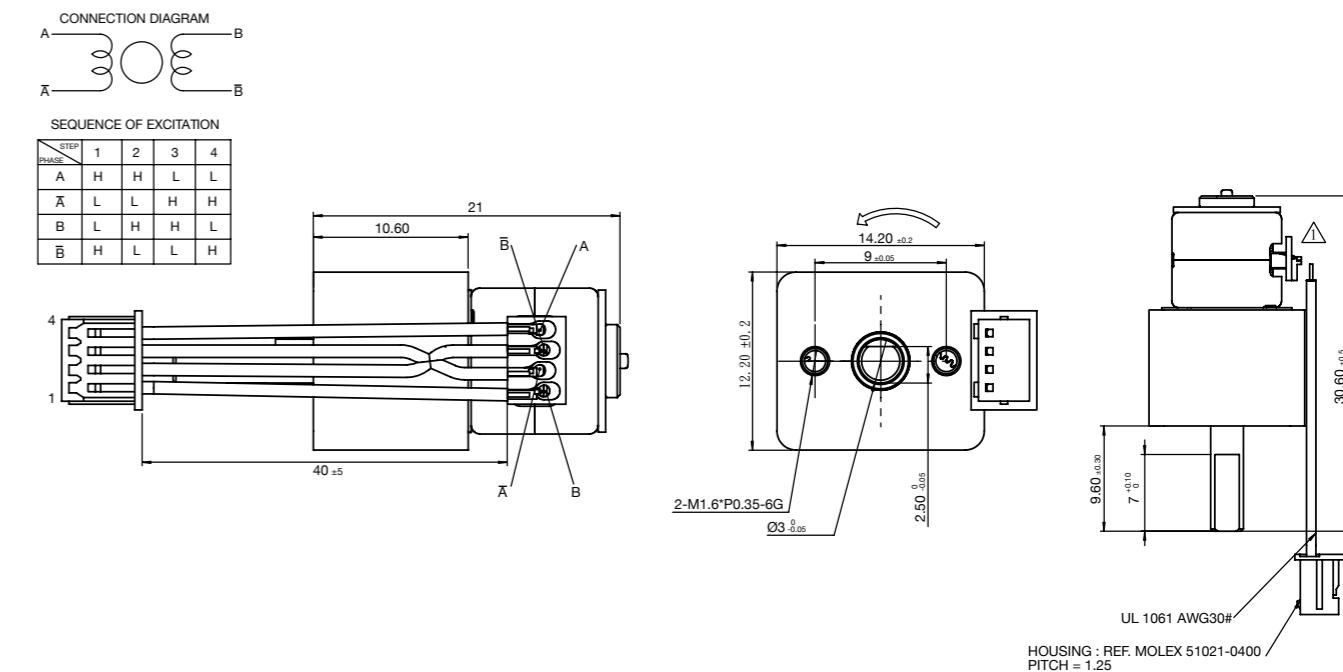


**31 STEPPING MOTOR | Ø10
Metal Gearbox**

PRODUCT CATALOG 2018




unit	HOT0052012	HOT0063003	SRM1008002	SRM1008009				
Dimension mm	Ø10*24.7L	Ø10*26.9L	Ø10*45.4L	Ø10*47.22L				
Electrical Characteristic								
Nominal Voltage V	5.0	5.0	3.3	-				
Rated Current mA	-	-	-	200				
Operating Range V	-	4.5~5.5	-	-				
Coil Resistance Ω	15	19	15	19				
No. of Phases	-	-	-	-				
Step Angle °/step	0.346	0.143	18	0.134				
Excitation Method	2-2	1-2	2-2	2-2				
Drive Mode	Bi-Polar	-	-	-				
Operating Temperature Range °C	-10~+60	-30~+85	-10~+75	-40~+70				
Storage Temperature °C	-40~+80	-40~+105	-	-40~+70				
Mechanical Specification								
Reduction Ratio	1:52	1:63.07	1:900	1:298				
Output Torque mNm	250	45	1200	100				
Max Starting Frequency PPS	1000	1000	800	800				
Max Slewing Frequency PPS	2500	2500	1200	1000				
Mechanical Noise dB	60	40	-	60				
Power Supply Type								
Type	AC	AC	AC	AC				
FPC	x	x	x	o				
Lead Wire	o	o	x	x				
Pin Connector	o	o	x	x				

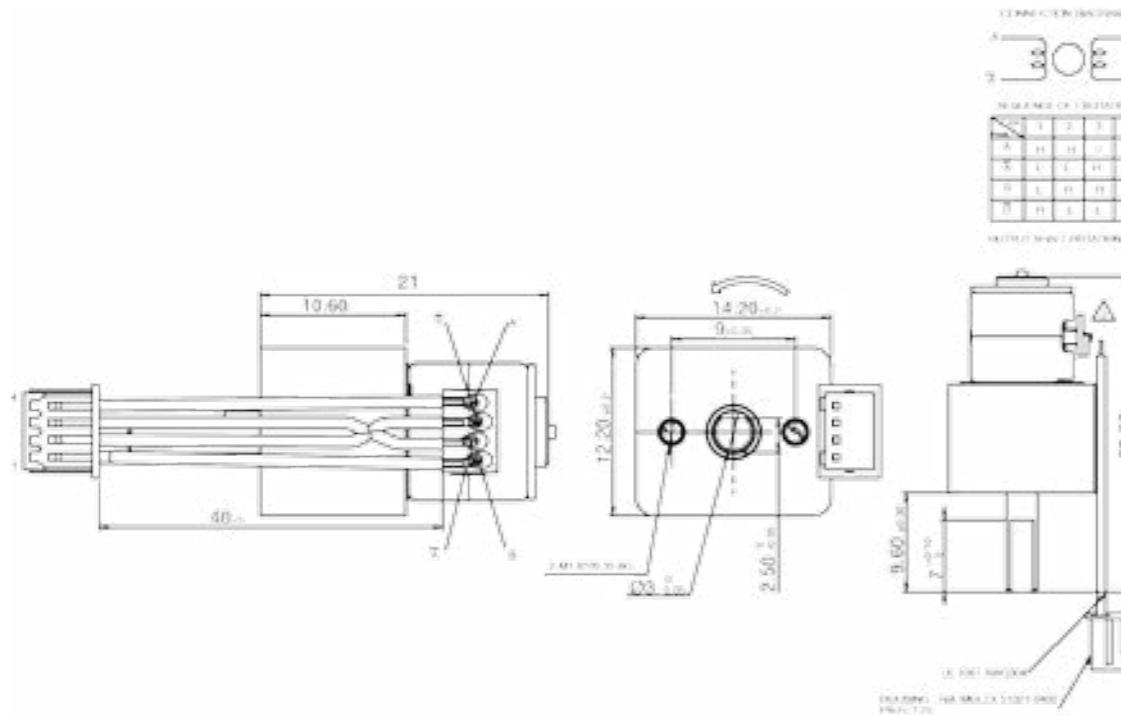

**STEPPING MOTOR | Ø15
Metal Gearbox**




unit	HOT0096012	SRM1509009	HOT0233016	SRM1509030				
Dimension mm	Ø15*19.9L	Ø14.8*21.6L	Ø14.8*22.7L	Ø14.8*28.1L				
Electrical Characteristic								
Nominal Voltage V	5.0	3.3	12.0	5.0				
Rated Current mA	-	-	-	-				
Operating Range V	-	-	-	-				
Coil Resistance Ω	10	10	40	10				
No. of Phases	-	-	-	-				
Step Angle °/step	0.188	0.514	0.077	0.188				
Excitation Method	2-2	2-2	2-2	2-2				
Drive Mode	-	-	Bi-Polar	-				
Operating Temperature Range °C	0~+55	0~+55	0~+55	-40~+125				
Storage Temperature °C	-	-	0~+55	-				
Mechanical Specification								
Reduction Ratio	96	1:35	1:233	96				
Output Torque mNm	310	230	800	310				
Max Starting Frequency PPS	800	800	1000	800				
Max Slewing Frequency PPS	900	1200	1800	900				
Mechanical Noise dB	-	-	60	-				
Power Supply Type								
Type	AC	AC	AC	AC				
FPC	x	x	x	x				
Lead Wire	o	o	o	o				
Pin Connector	o	o	o	o				

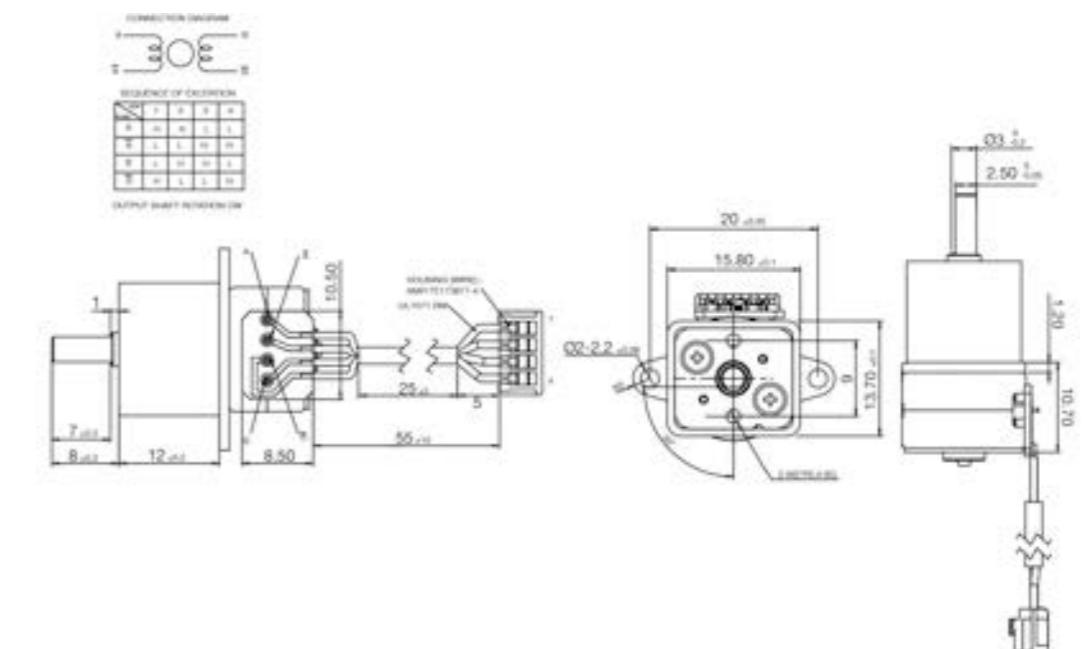

Plastic Gearbox




	unit	HOA0025006	SRP0605002					
Dimension	mm	R23.3'R14.5'R10.7	Φ6.5'15.3L					
Electrical Characteristic								
Nominal Voltage	V	2.5	3.3					
Rated Current	mA	-	-					
Operating Range	V	1.0~3.0	2.8~4.5					
Coil Resistance	Ω	11	30					
No. of Phases	-	-	-					
Step Angle	°/step	0.714	0.165					
Excitation Method	-	2-2	2-2					
Drive Mode	-	Bi-Polar	-					
Operating Temperature Range	°C	-20~+60	-20~+80					
Storage Temperature °C	-30~+70	-20~+80						
Mechanical Specification								
Reduction Ratio	-	1:25.2	1:109					
Output Torque	mNm	15.3	60					
Max Starting Frequency	PPS	-	-					
Max Slewing Frequency	PPS	-	-					
Mechanical Noise	dB	65	60					
Power Supply Type								
Type	-	AC	AC					
FPC	-	x	x					
Lead Wire	-	o	o					
Pin Connector	-	o	o					

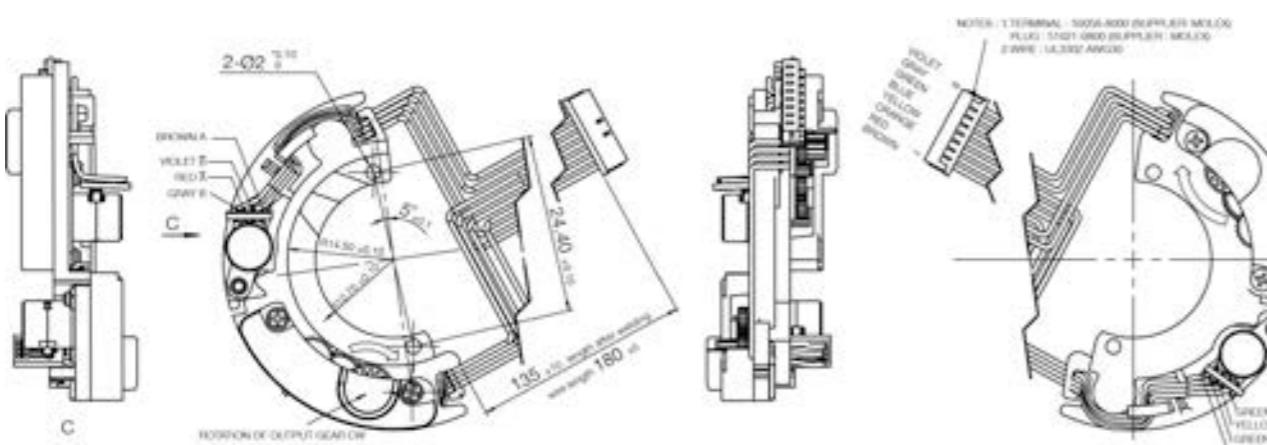


Plastic Gearbox





	unit	HOA0067007	HOA0069001	SRP0808026	SRP0808032	SRP0808001	SRP0808006	HOA0097005
Dimension	mm	R23.5'R16.3'R14.5	R24'R14.64'R9.7	Φ46.8'21'13.35	Φ08'8L	Φ8'17L	Φ8'18L	Φ8'59.276L
Electrical Characteristic								
Nominal Voltage	V	3.3	3.0	3.0	3.0	3.3	3.3	5.0
Rated Current	mA	-	-	-	-	-	-	-
Operating Range	V	3.3~4.5	3.0~5.0	2.0~4.0	3.0~5.0	1.5~4.0	3.3~4.5	3.0~5.0
Coil Resistance	Ω	21	20	40	40	60	16	35
No. of Phases	-	2	-	-	-	-	-	-
Step Angle	°/step	0.2687	0.187	0.224	0.514	0.514	0.29	0.1846
Excitation Method	-	2-2	2-2	2-2	1-2	2-2	2-2	2-2
Drive Mode	-	Bi-Polar	-	Bi-Polar	Bi-Polar	-	Bi-Polar	Bi-Polar
Operating Temperature Range	°C	-20~+80	-30~+80	-10~+60	-30~+80	-20~+80	-40~+70	-20~+80
Storage Temperature °C	-40~+80	-40~+80	-20~+70	-30~+80	-	-	-40~+80	-40~+80
Mechanical Specification								
Reduction Ratio	-	1:67	1:69	1:80.3	1:80.3	1:200	1:62	1:97.48
Output Torque	mNm	70	50	35	230	130	50	20
Max Starting Frequency	PPS	-	-	800	1100	-	900	600
Max Slewing Frequency	PPS	-	-	1000	1800	-	1300	1800
Mechanical Noise	dB	60	60	60	40	-	-	45
Power Supply Type								
Type	-	AC	AC	AC	AC	AC	AC	AC
FPC	-	x	x	o	x	x	o	x
Lead Wire	-	o	o	x	o	o	x	o
Pin Connector	-	o	o	x	o	o	x	o

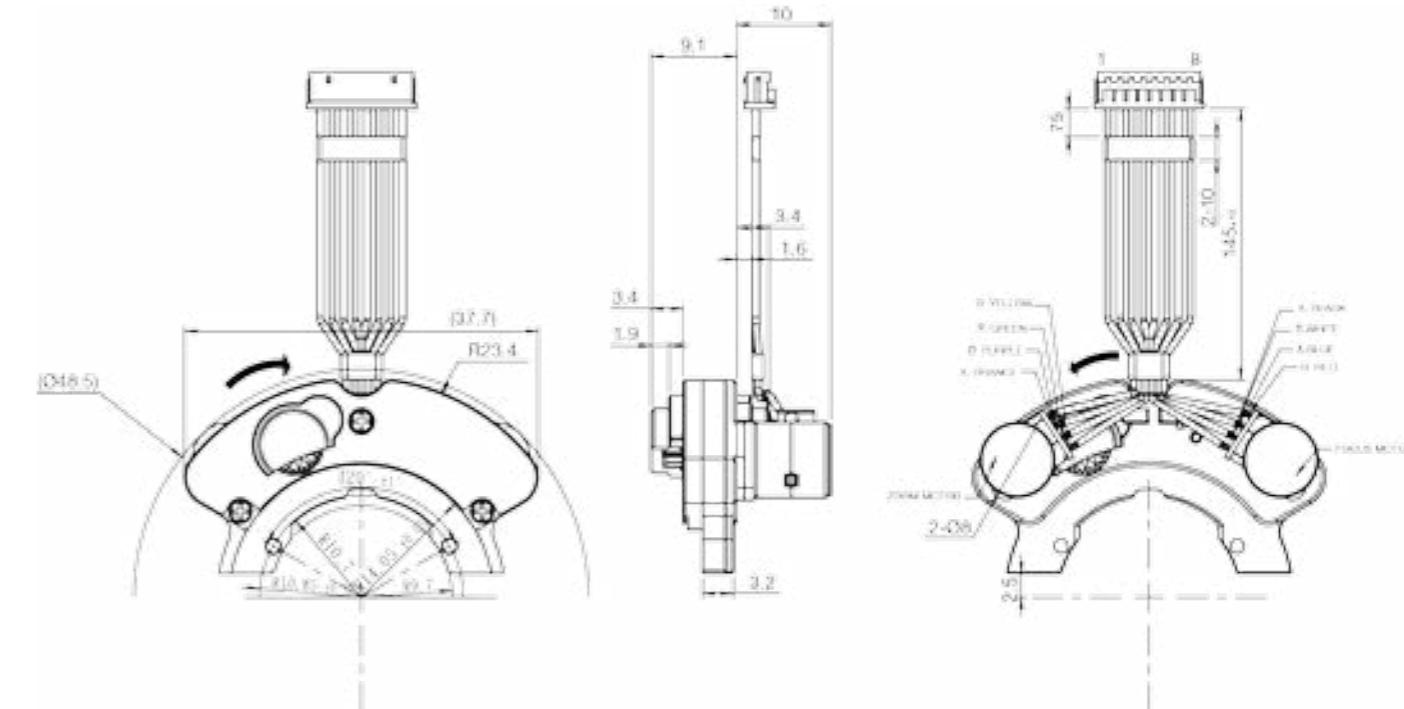

Plastic Gearbox

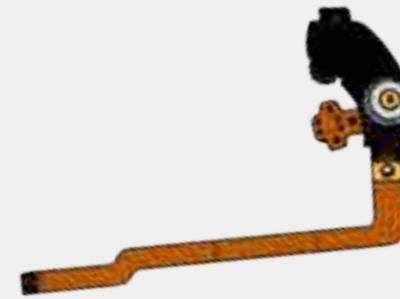

	unit	SRP1008002
Dimension	mm	Φ55*13L
Electrical Characteristic		
Nominal Voltage	V	3.3
Rated Current	mA	-
Operating Range	V	3.3~4.5
Coil Resistance	Ω	16
No. of Phases	-	
Step Angle	°/step	0.29
Excitation Method	-	2-2
Drive Mode	-	Bi-Polar
Operating Temperature Range	°C	-40~+70
Storage Temperature °C	-	
Mechanical Specification		
Reduction Ratio	-	1:62
Output Torque	mNm	200
Max Starting Frequency	PPS	900
Max Slewing Frequency	PPS	1300
Mechanical Noise	dB	-
Power Supply Type		
Type	-	AC
FPC	-	o
Lead Wire	-	x
Pin Connector	-	x

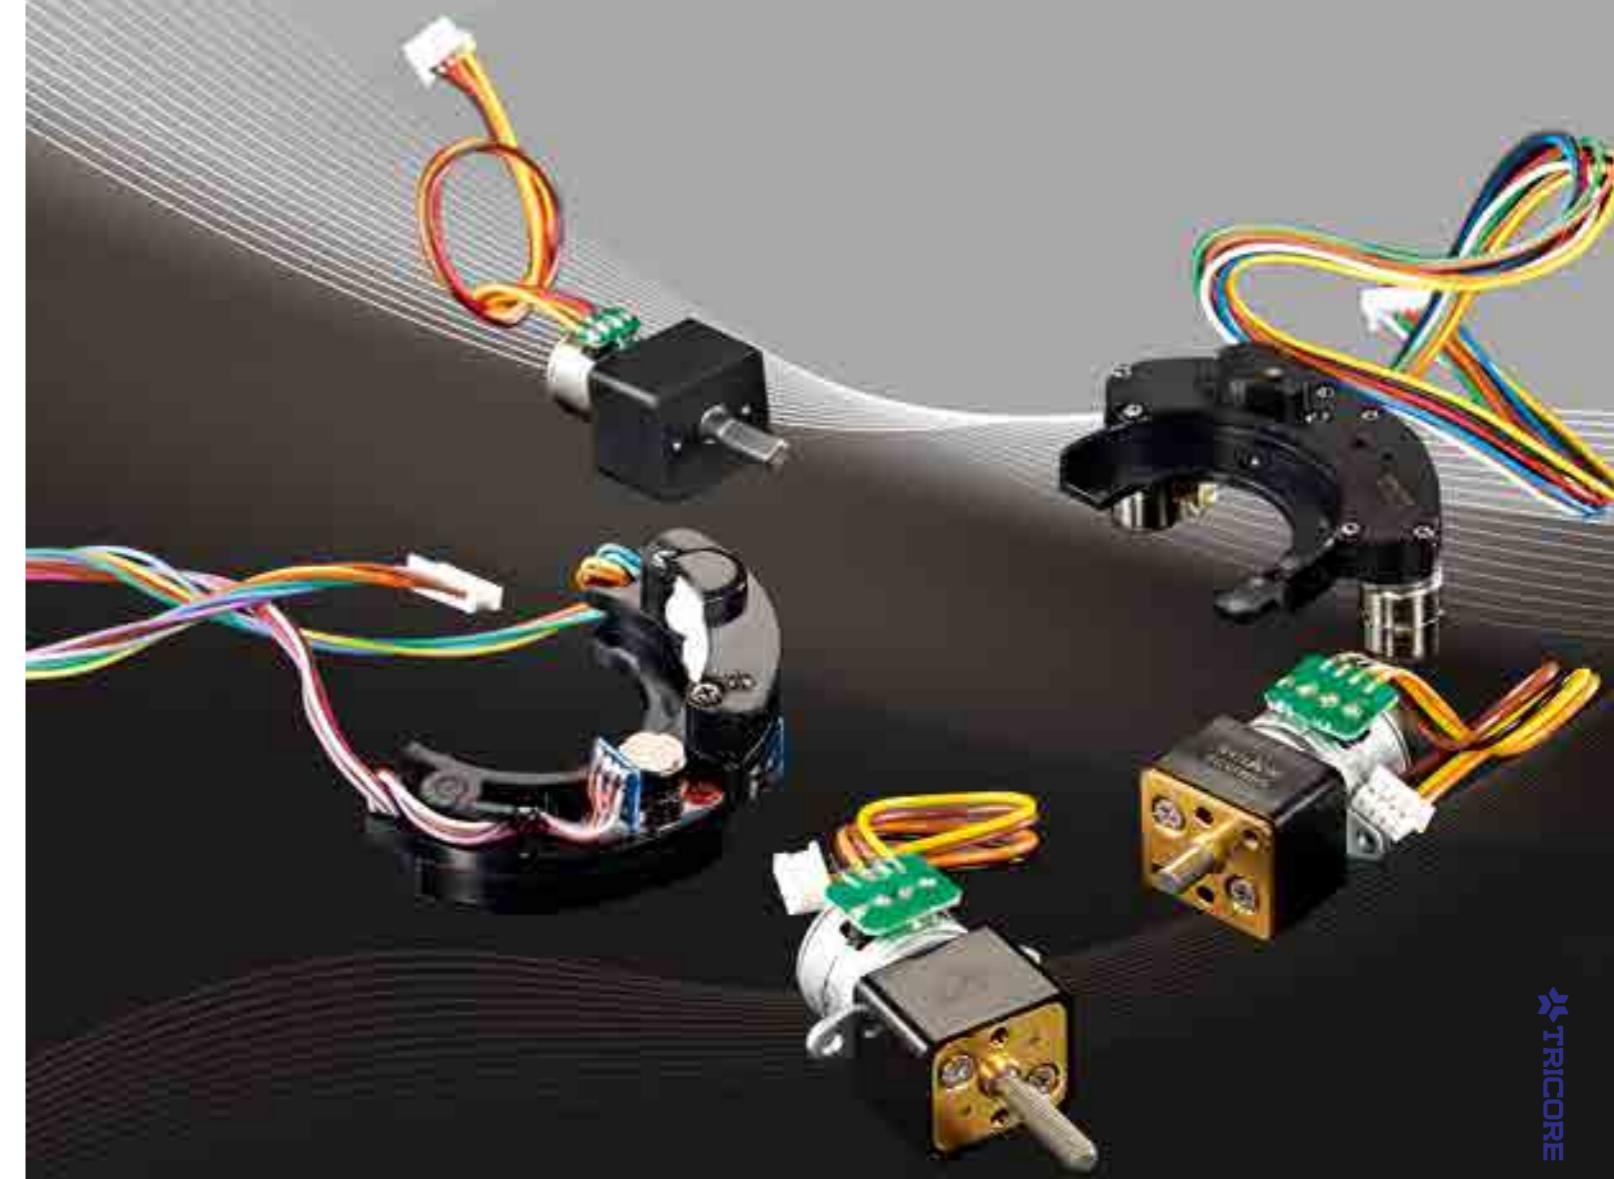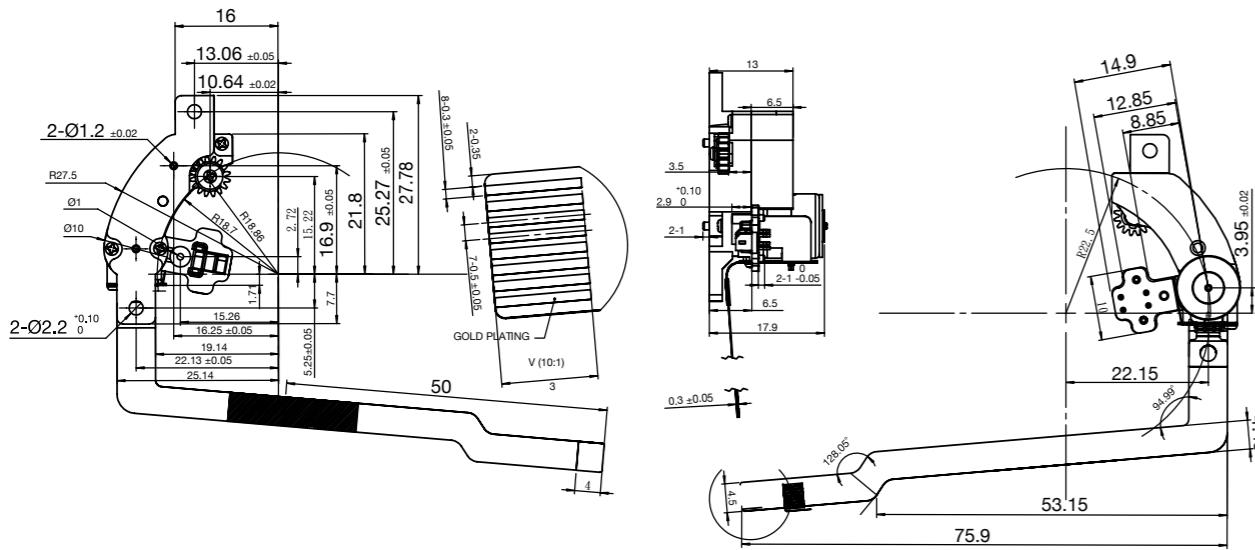




GEAR MOTOR

GEAR MOTOR | Ø12

Metal Gear




	unit	BFM1215001	BFM1215021	BFM1215079	BFM1215081	BFM1215084	
Dimension	mm	Ø12*15	Ø12*15	Ø12*15	Ø12*15	Ø12*15	
Standard Operating Conditions							
Nominal Voltage	V	4.5	4.5	3.7	4.5	3.0	
Operating Range	V	3.0~6.0	3.0~6.0	2.0~5.0	3.0~6.0	3.0~4.0	
Rated Load	mNm	500	200	500	30	200	
Direction of Rotation		CW&CCW	CW&CCW	CW&CCW	CW&CCW	CW&CCW	
Operating Temperature Range	°C	-20~+50	-35~+50	-40~+65	-40~+85	-10~+65	
Storage Temperature Range	°C	-30~+70	-40~+70	-40~+85	-40~+80	-20~+70	
Mechanical Specification							
No-Load Current	mA	90	80	65	100	100	
No-Load Speed	rpm	54	107	55	1086	141	
Rated-Load Current	mA	220	250	300	270	350	
Rated-Load Speed	rpm	40	93	37	870	112	
Stall Torque	mNm	1500	755	704	112.2	622	
Stall Current	mA	880	800	1000	1500	1000	
Output Power	W	0.99	1.125	1.11	1.215	7.875	
Mechanical Noise	dB	60	60	65	60	70	
Gearhead							
Gearhead Length	mm	4.5	4.5	10	4	10	
Reduction Ratio		1:298	1:150	1:210	1:15	1:100	
Gearhead Type		Spur	Spur	Spur	Spur	Spur	
Number Of Stages		5	4	5	3	4	

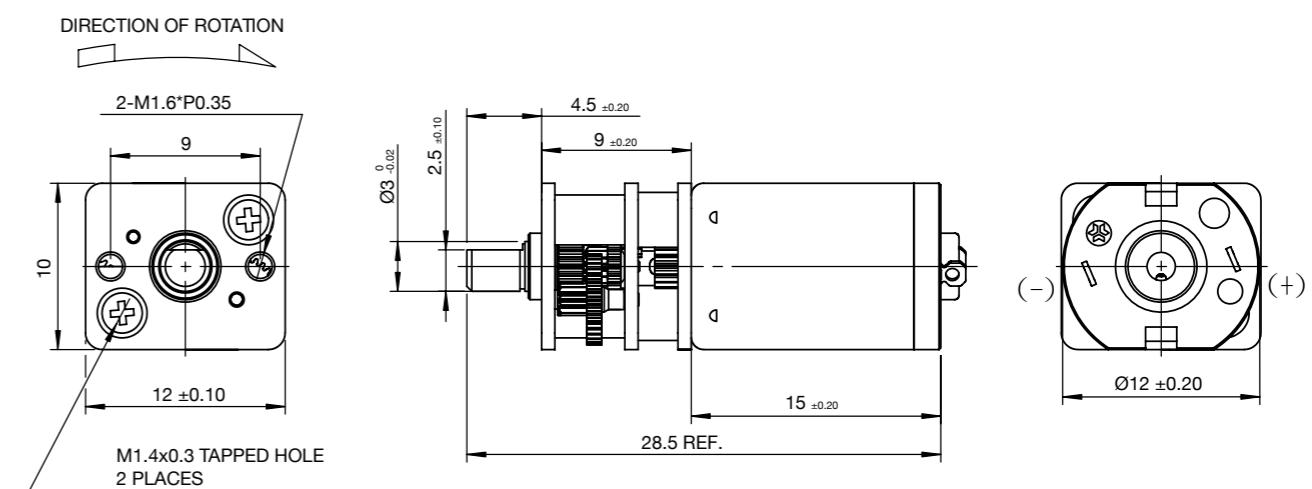

Metal Gear




	unit	BFM1220011	BFM1220009#	HOT0052014	BFM1225002				
Dimension	mm	Ø12*20	Ø12*20	Ø12*20	Ø12*25				
Standard Operating Conditions									
Nominal Voltage	V	3.6	4.5	4.5	3.0				
Operating Range	V	2.0~5.0	2.0~5.0	2.5~6.0V	1.5~4.5				
Rated Load	mNm	500	725	200	200				
Direction of Rotation		CW&CCW	CW&CCW	CW&CCW	CW&CCW				
Operating Temperature Range	°C	-20~+65	-40~+65	-20~+50	-20~+50				
Storage Temperature Range	°C	-	-40~+85	-30~+70	-30~+70				
Mechanical Specification									
No-Load Current	mA	120	50	150	70				
No-Load Speed	rpm	35	34	300	70				
Rated-Load Current	mA	-	180	500	180				
Rated-Load Speed	rpm	-	30	150	53				
Stall Torque	mNm	3998	397.8	755	600				
Stall Current	mA	1500	1000	800	250				
Output Power	W	1.08	0.81	1.125	1.8				
Mechanical Noise	dB	64	64	60	60				
Gearhead									
Gearhead Length	mm	10	1.5	4.5	4.5				
Reduction Ratio		1:500	1:378	1:52	1:52				
Gearhead Type		Spur	Spur	Spur	Spur				
Number Of Stages		6	5	3	4				

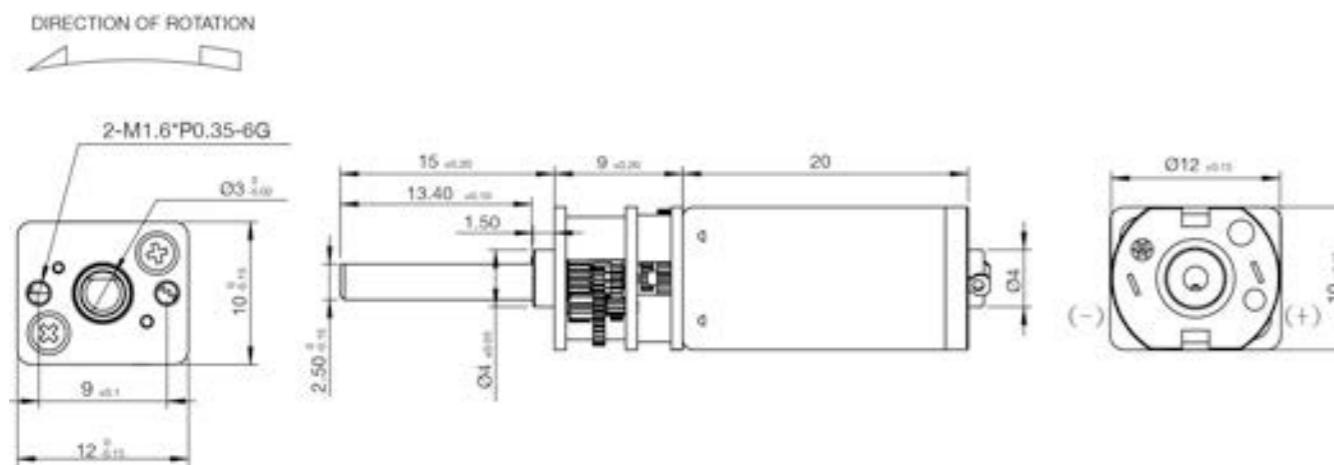

Metal Gear




	unit	BFM1220006							
Standard Operating Conditions									
Nominal Voltage	V	12.0							
Operating Range	V	6.0~13.0							
Rated Load	mNm	250							
Direction of Rotation		CW&CCW							
Operating Temperature Range	°C	-20~+60							
Storage Temperature Range	°C	-40~+80							
Mechanical Specification									
No-Load Current	mA	65							
No-Load Speed	rpm	80							
Rated-Load Current	mA	160							
Rated-Load Speed	rpm	74							
Stall Torque	mNm	1275							
Stall Current	mA	2000							
Output Power	W	1.92							
Mechanical Noise	dB	60							
Gearhead									
Gearhead Length	mm	9.5							
Reduction Ratio		1:210							
Gearhead Type		Spur							
Number Of Stages		4							

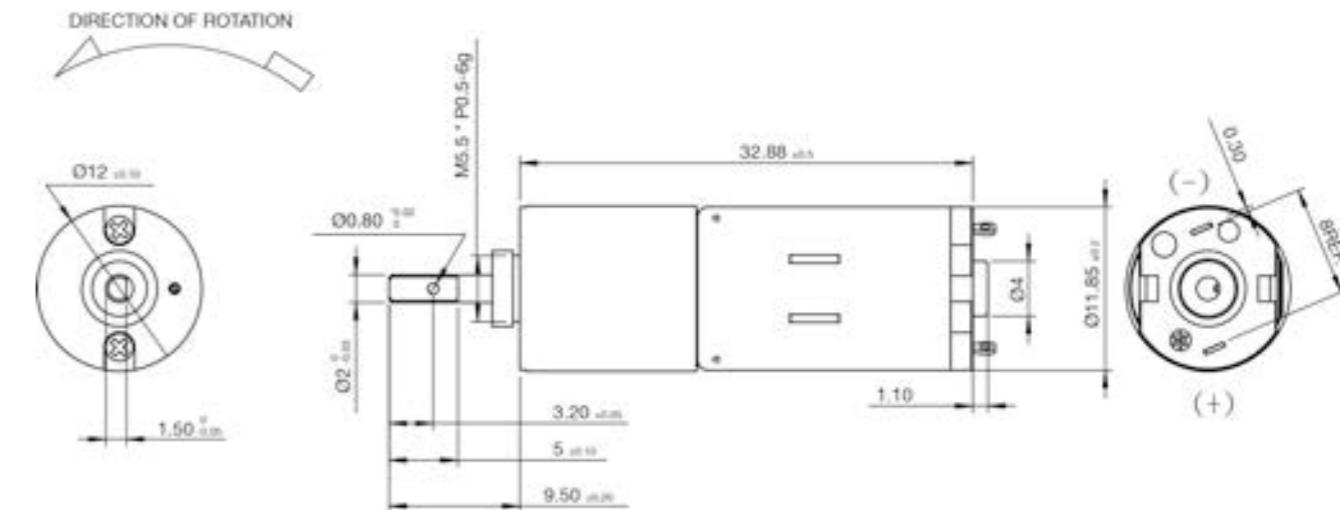


41 GEAR MOTOR | Ø12

Metal Gear


unit	BFM1215086	BFM1215087					
Dimension mm	Ø12*15	Ø12*15					
Standard Operating Conditions							
Nominal Voltage V	5.0	12					
Operating Range V	3.0~6.0	10.0~14.0					
Rated Load mNm	780	350					
Direction of Rotation	CW&CCW	CW&CCW					
Operating Temperature Range °C	-10~+50	-10~+50					
Storage Temperature Range °C	-20~+75	-20~+75					
Mechanical Specification							
No-Load Current mA	70	40					
No-Load Speed rpm	30	78					
Rated-Load Current mA	220	120					
Rated-Load Speed rpm	23	61					
Stall Torque mNm	1754.4	948.6					
Stall Current mA	600	1					
Output Power W	1.1	1.44					
Mechanical Noise dB	60	60					
Gearhead							
Gearhead Length mm	9	10					
Reduction Ratio	1:500	1:200					
Gearhead Type	Spur	Spur					
Number Of Stages	6	4					

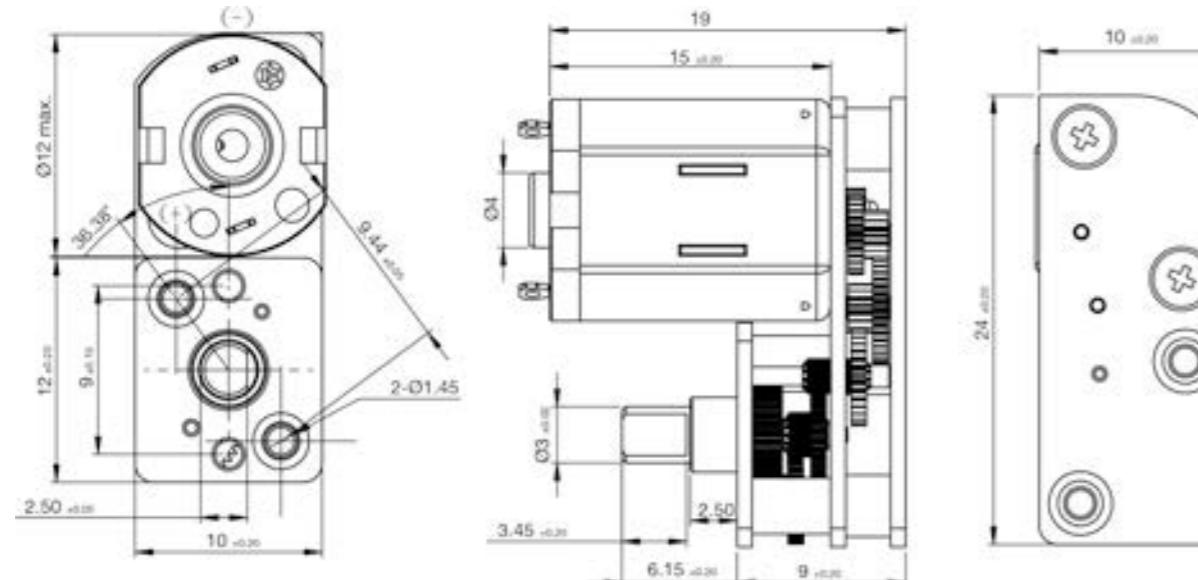

42 GEAR MOTOR | Ø14

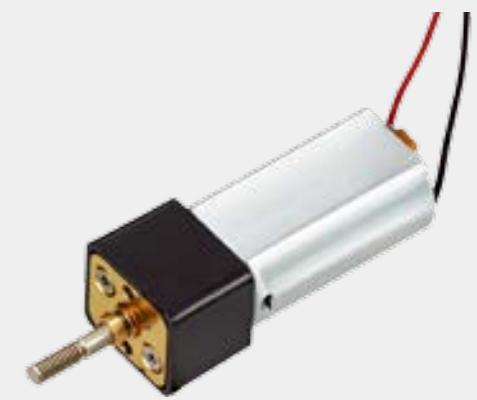Metal Gear

unit	BFM1420001						
Dimension mm	Ø14*20						
Standard Operating Conditions							
Nominal Voltage V	2.5						
Operating Range V	1.0~3.0						
Rated Load mNm	7.35						
Direction of Rotation	CW&CCW						
Operating Temperature Range °C	-10~+60						
Storage Temperature Range °C	-20~+70						
Mechanical Specification							
No-Load Current mA	75						
No-Load Speed rpm	45						
Rated-Load Current mA	95						
Rated-Load Speed rpm	43						
Stall Torque mNm	98						
Stall Current mA	900						
Output Power W	0.2						
Mechanical Noise dB	45						
Gearhead							
Gearhead Length mm	7						
Reduction Ratio	1:150						
Gearhead Type	Spur						
Number Of Stages	4						

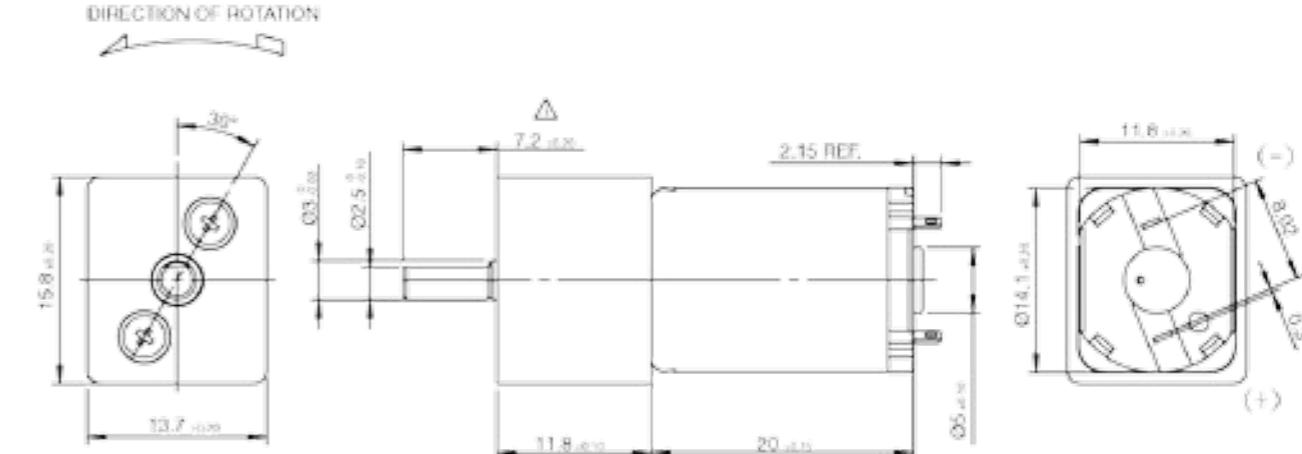


43 GEAR MOTOR | Ø15

Metal Gear

unit	BFM1526020	BFM1526004					
Dimension mm	Ø15*26	Ø15*26.5					
Standard Operating Conditions							
Nominal Voltage V	6.0	12.0					
Operating Range V	4.5~6.5	10.0~14.0					
Rated Load mNm	100	500					
Direction of Rotation	CW&CCW	CW&CCW					
Operating Temperature Range °C	-20~+70	-10~+40					
Storage Temperature Range °C	-40~+85	-20~+60					
Mechanical Specification							
No-Load Current mA	20	60					
No-Load Speed rpm	3.3	42					
Rated-Load Current mA	49	120					
Rated-Load Speed rpm	2.5	39					
Stall Torque mNm	1499	4998					
Stall Current mA	300	800					
Output Power W	0.6	1.44					
Mechanical Noise dB	60	60					
Gearhead							
Gearhead Length mm	13.5	4.4					
Reduction Ratio	1:233	1:233					
Gearhead Type	Spur	Spur					
Number Of Stages	4	4					

DIRECTION OF ROTATION:

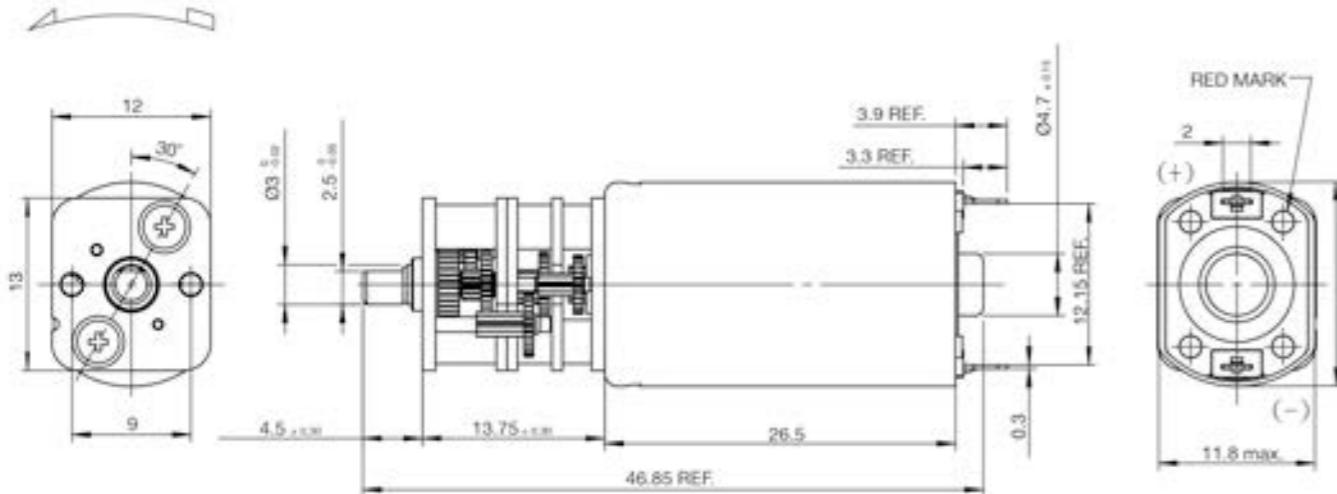


44 GEAR MOTOR | Ø24

Metal Gear

unit	CFM2430013	CFM2430006					
Dimension mm	Ø24*30	Ø24*30					
Standard Operating Conditions							
Nominal Voltage V	12.0	12.0					
Operating Range V	8.0~15.0	8.0~15.0					
Rated Load mNm	5000	490.33					
Direction of Rotation	-	CW&CCW					
Operating Temperature Range °C	-20~+80	-20~80					
Storage Temperature Range °C	-30~+70	-30~+70					
Mechanical Specification							
No-Load Current mA	100	100					
No-Load Speed rpm	136	136					
Rated-Load Current mA	1500	1500					
Rated-Load Speed rpm	80	80					
Stall Torque mNm	9996	980.66					
Stall Current mA	3000	-					
Output Power W	18	-					
Mechanical Noise dB	60	-					
Gearhead							
Gearhead Length mm	18.1	18.1					
Reduction Ratio	1:77	1:77					
Gearhead Type	Spur	Spur					
Number Of Stages	3	3					


DIRECTION OF ROTATION:

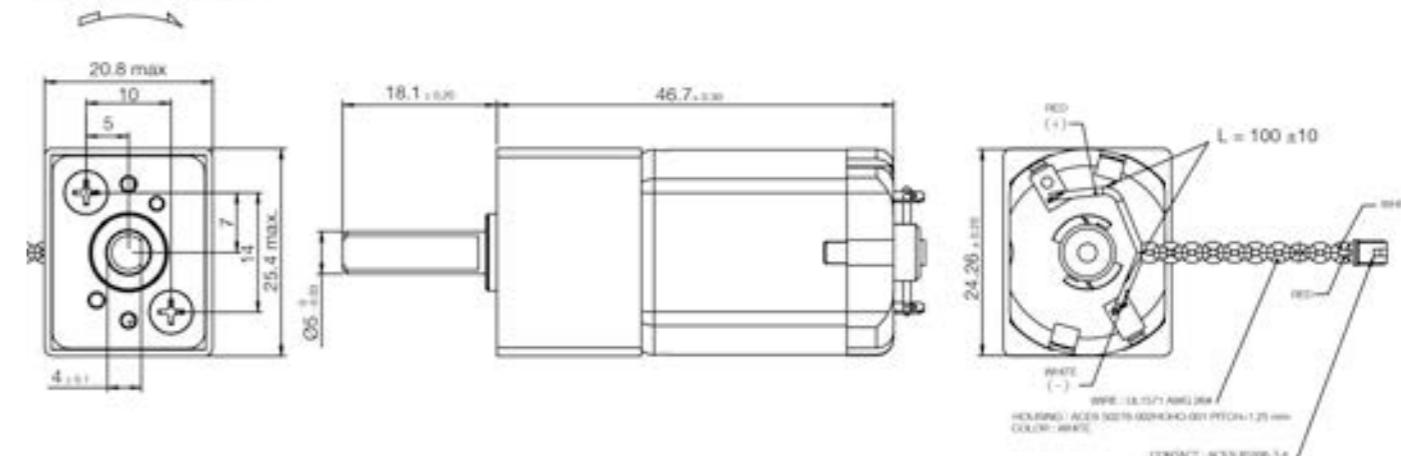

Plastic Gear




	unit	BFP0814001	BFP0814005						
Dimension	mm	Φ8*14L	Φ8*14L						
Standard Operating Conditions									
Nominal Voltage	V	4.0	5.6						
Operating Range	V	2.0~5.0	2.0~6.0						
Rated Load	mNm	6	10						
Direction of Rotation		CW&CCW	CW&CCW						
Operating Temperature Range	°C	-10~+70	-10~+70						
Storage Temperature Range	°C	-40~+85	-40~+86						
Mechanical Specification									
No-Load Current	mA	45	60						
No-Load Speed	rpm	94	180						
Rated-Load Current	mA	100	180						
Rated-Load Speed	rpm	74	140						
Stall Torque	mNm	190	380						
Stall Current	mA	270	480						
Output Power	W	0.40	1.01						
Mechanical Noise	dB								
Gearhead									
Gearhead Length	mm	-	-						
Reduction Ratio		-	-						
Gearhead Type		Spur	Spur						
Number Of Stages		3	2						

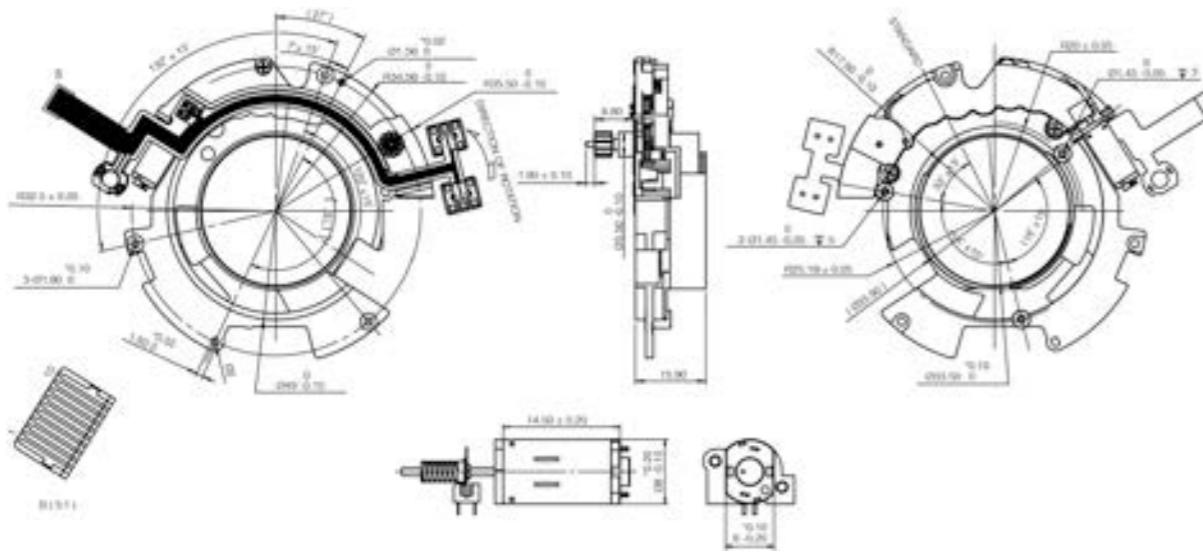

Plastic Gear




	unit	BFP1015021							
Standard Operating Conditions									
Nominal Voltage	V	5.0							
Operating Range	V	4.0~6.0							
Rated Load	mNm	25.0							
Direction of Rotation		CW&CCW							
Operating Temperature Range	°C	-20~+60							
Storage Temperature Range	°C	-20~+60							
Mechanical Specification									
No-Load Current	mA	25							
No-Load Speed	rpm	25.2							
Rated-Load Current	mA	-							
Rated-Load Speed	rpm	-							
Slip Torque	mNm	60							
Slip Current	mA	70							
Output Power	W	0.63							
Mechanical Noise	dB	-							
Gearhead									
Gearhead Length	mm	18.4							
Reduction Ratio		1:359.95							
Gearhead Type		Spur							
Number Of Stages		2							

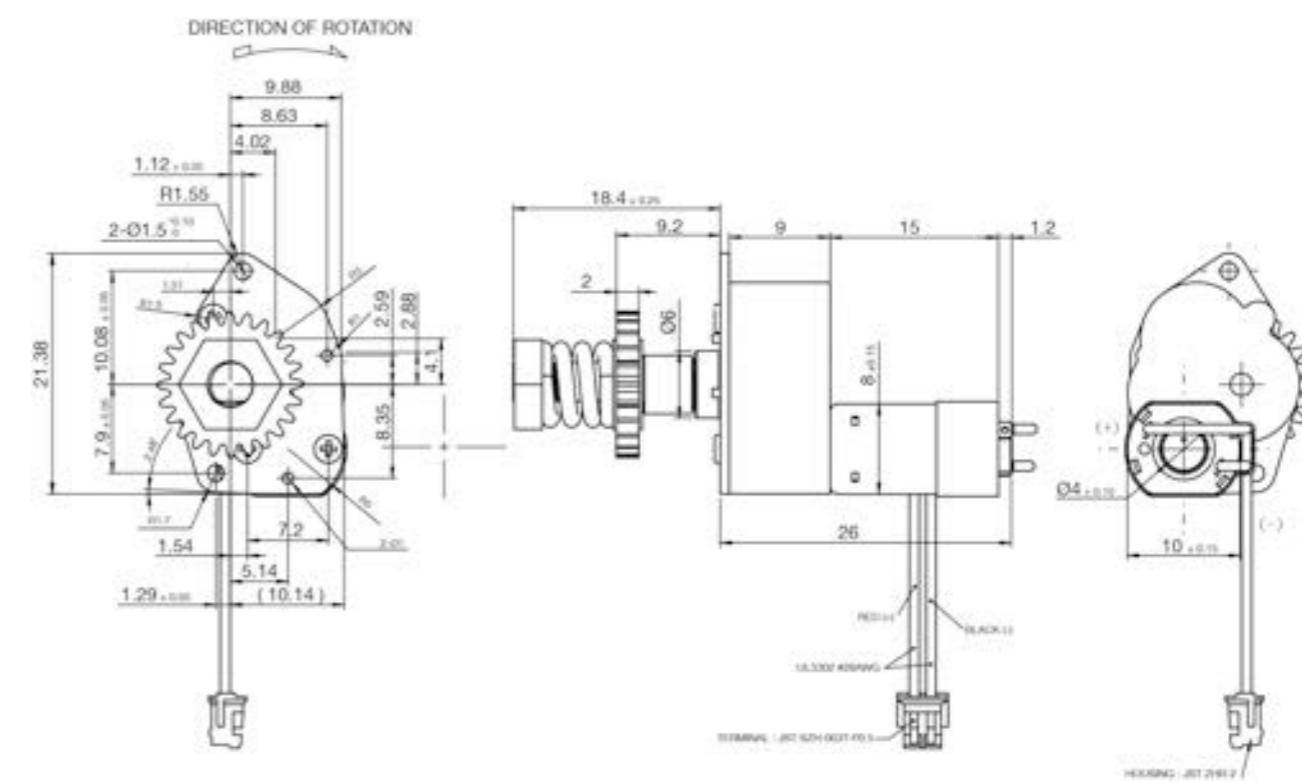

47 GEAR MOTOR | Ø12

Plastic Gear


	unit	BFP1215001	HOA0001001					
Dimension	mm	Φ12*15L	Φ16.6*47L					
Standard Operating Conditions								
Nominal Voltage	V	5.0	4.5					
Operating Range	V	3.0~7.0	4.5~6.0					
Rated Load	mNm	-	-					
Direction of Rotation		CW&CCW	-					
Operating Temperature Range	°C	-10~+60	-35~+66					
Storage Temperature Range	°C	-30~+70	-35~+70					
Mechanical Specification								
No-Load Current	mA	100	-					
No-Load Speed	rpm	8.5	-					
Rated-Load Current	mA	300	-					
Rated-Load Speed	rpm	7.5 / 6.3	-					
Stall Torque	mNm	7140	-					
Stall Current	mA	150	-					
Output Power	W	1.50	-					
Mechanical Noise	dB	60	-					
Gearhead								
Gearhead Length	mm	-	-					
Reduction Ratio		1:1993.06	-					
Gearhead Type		Spur	-					
Number Of Stages								

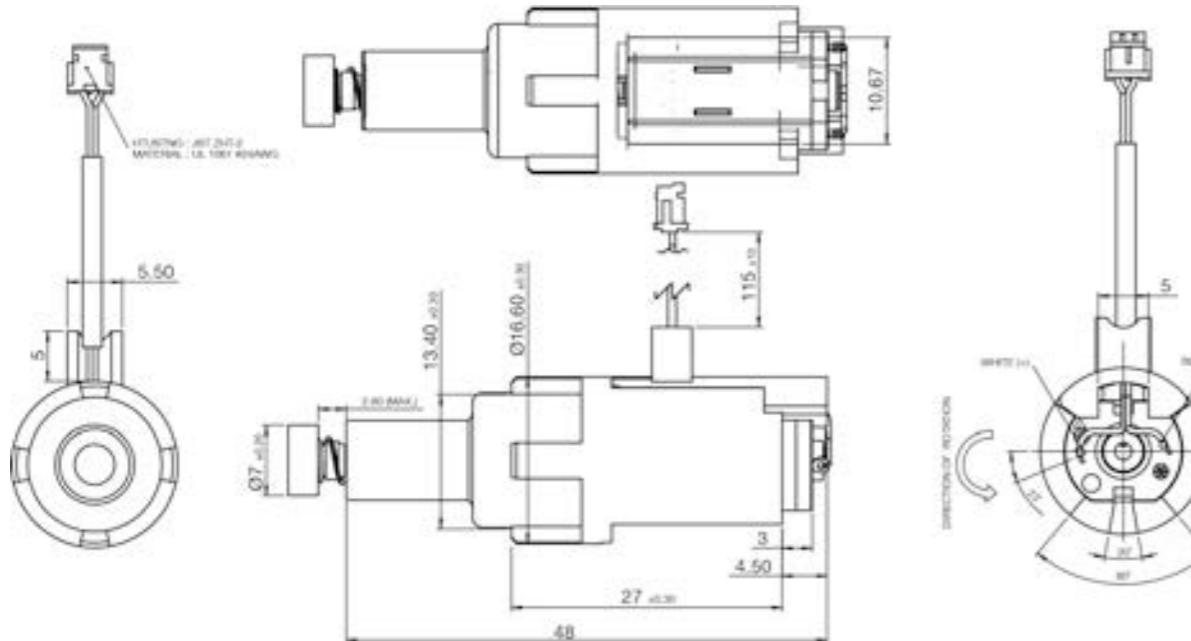

48 GEAR MOTOR | Ø14

Plastic Gear


	unit	BFP1418001	BFP1420001					
Dimension	mm	Φ14*18L	Φ14*20L					
Standard Operating Conditions								
Nominal Voltage	V	3.5	5.0					
Operating Range	V	1.5~5.0	4.0~6.0					
Rated Load	mNm	8	40					
Direction of Rotation		CW&CCW	CW&CCW					
Operating Temperature Range	°C	-10~+70	-10~+60					
Storage Temperature Range	°C	-40~+80	-20~+60					
Mechanical Specification								
No-Load Current	mA	53	35					
No-Load Speed	rpm	64.1	22.33					
Rated-Load Current	mA	-	-					
Rated-Load Speed	rpm	-	-					
Slip Torque	mNm	302	70					
Slip Current	mA	192	75					
Output Power	W	0.29	0.38					
Mechanical Noise	dB	52	60					
Gearhead								
Gearhead Length	mm	-	18.4					
Reduction Ratio		1:70	1:224					
Gearhead Type		Spur	Spur					
Number Of Stages		3	4					

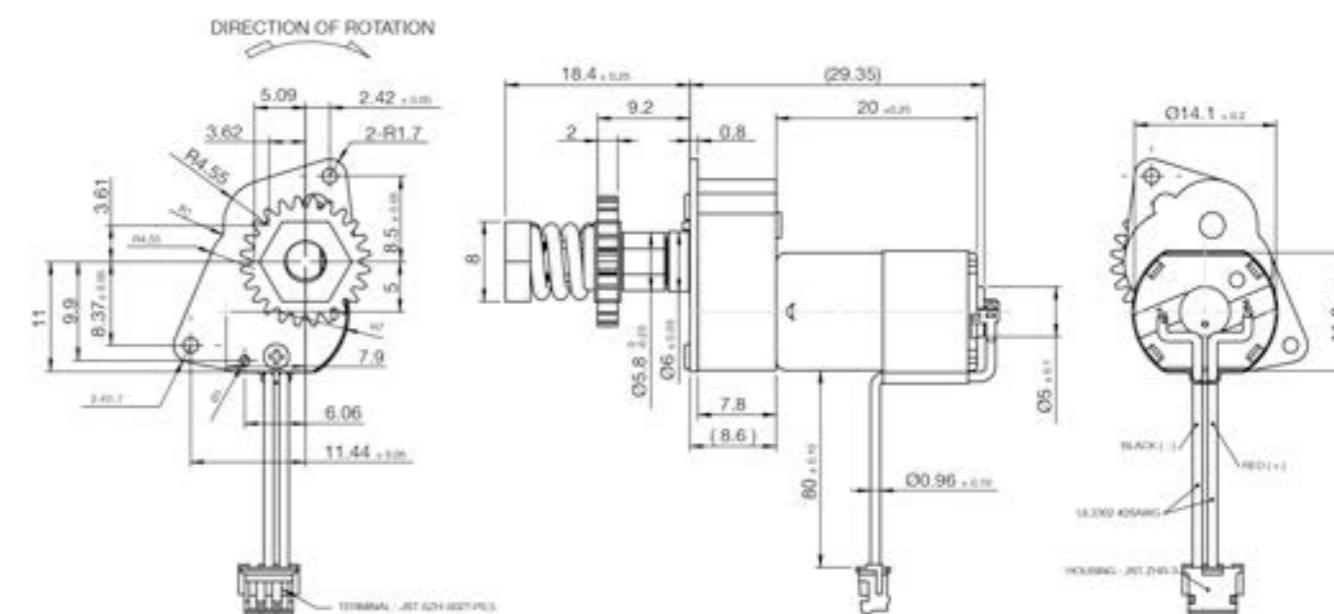

Plastic Gear



	unit	BFP1526001
Dimension	mm	27.6*30*56.8
Standard Operating Conditions		
Nominal Voltage	V	5.0
Operating Range	V	4.5~6.0
Rated Load	mNm	50
Direction of Rotation		CW&CCW
Operating Temperature Range	°C	-20~+60
Storage Temperature Range	°C	+20~+60
Mechanical Specification		
No-Load Current	mA	40
No-Load Speed	rpm	11.2
Rated-Load Current	mA	-
Rated-Load Speed	rpm	-
Stall Torque	mNm	714
Stall Current	mA	55
Output Power	W	0.45
Mechanical Noise	dB	51
Gearhead		
Gearhead Length	mm	19.7
Reduction Ratio		1:358.5
Gearhead Type		Spur
Number Of Stages		5

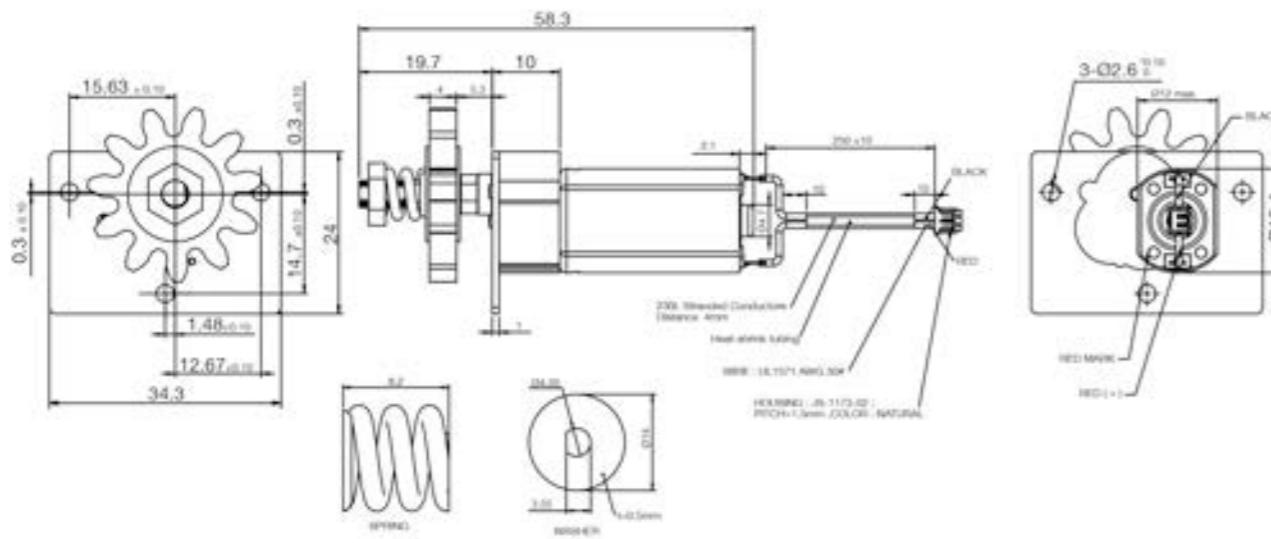


CORELESS MOTOR

CORELESS MOTOR | Ø17

Carbon Brush




unit	CCG1718001					
	Pinion Gear					
Standard Operating Conditions						
Nominal Voltage	V	5.5				
Operating Range	V	3.0~6.0				
Rated Load	mNm	0.98				
Direction of Rotation		CW & CCW				
Operating Temperature Range	°C	-10~+60				
Storage Temperature Range	°C	-20~+80				
Electrical Characteristic						
No-Load Current	mA	90				
No-Load Speed	rpm	1500				
Rated Current	mA	450				
Rated Speed	rpm	13500				
Stall Torque	mNm	80				
Max. Starting Voltage	V	0.5				
Max. Starting Current	mA	2900				
Rotor Resistance	Ω	2.1				
Insulation Resistance	Mohm	10				
Weight of Motor	g	-				

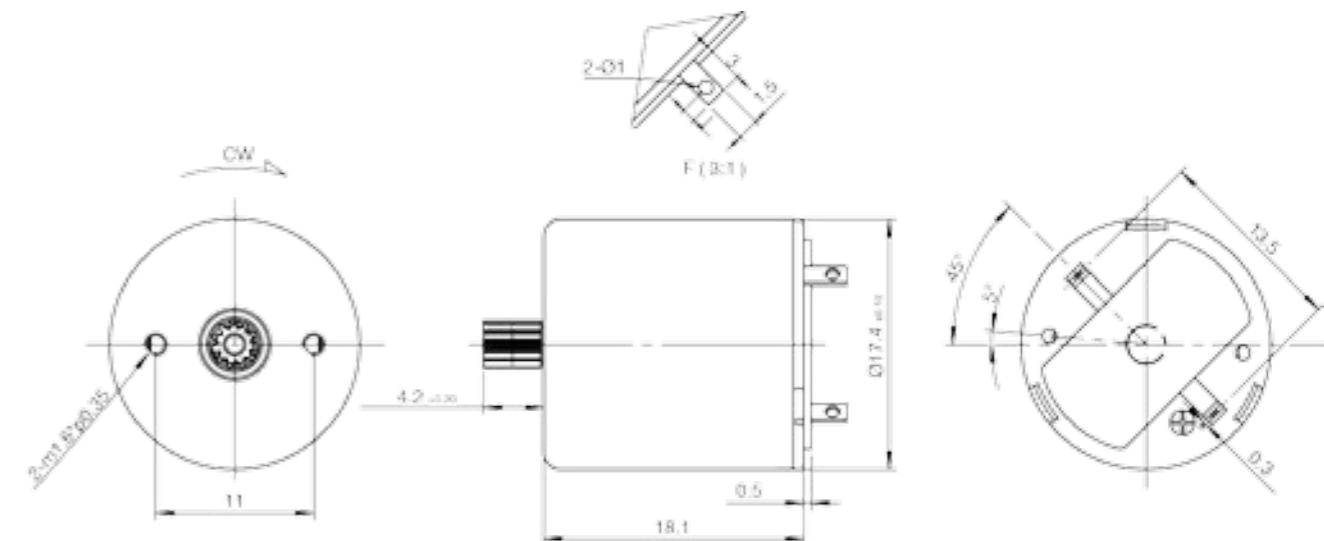

53 CORELESS MOTOR | Ø08

Metal Brush


unit	BCG0819004	Pinion Gear
Standard Operating Conditions		
Nominal Voltage	V	3.0
Operating Range	V	2.0~4.0
Rated Load	mNm	0.44
Direction of Rotation	CW&CCW	
Operating Temperature Range	°C	-10~+60
Storage Temperature Range	°C	-20~+80
Electrical Characteristic		
No-Load Current	mA	15
No-Load Speed	rpm	9700
Rated Current	mA	235
Rated Speed	rpm	2200
Stall Torque	mNm	0.57
Max. Starting Voltage	V	1.0
Max. Starting Current	mA	300
Rotor Resistance	Ω	11.8
Insulation Resistance	Mohm	1.0
Weight of Motor	g	4.74

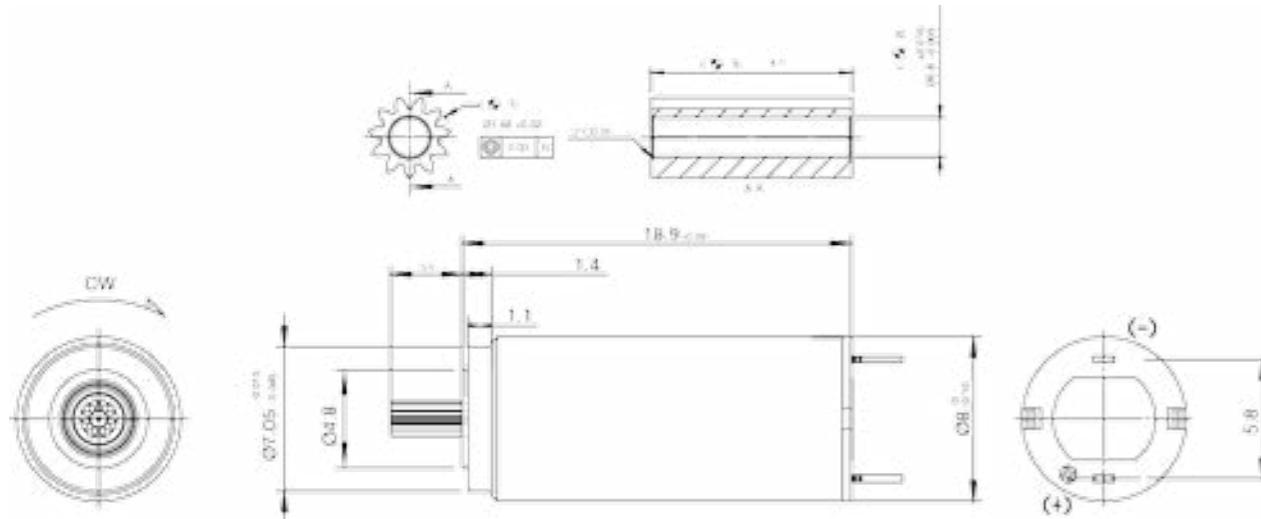

54 CORELESS MOTOR | Ø10

Metal Brush

unit	BCG1015007	Pinion Gear
Standard Operating Conditions		
Nominal Voltage	V	6.0
Operating Range	V	3~7
Rated Load	mNm	0.294
Direction of Rotation	CW&CCW	
Operating Temperature Range	°C	-10~+60
Storage Temperature Range	°C	-20~+80
Electrical Characteristic		
No-Load Current	mA	15
No-Load Speed	rpm	22500
Rated Current	mA	192
Rated Speed	rpm	14600
Stall Torque	mNm	1.20
Max. Starting Voltage	V	0.5
Starting Current	mA	510
Rotor Resistance	Ω	11.7
Insulation Resistance	Mohm	1.0
Weight of Motor	g	5.54

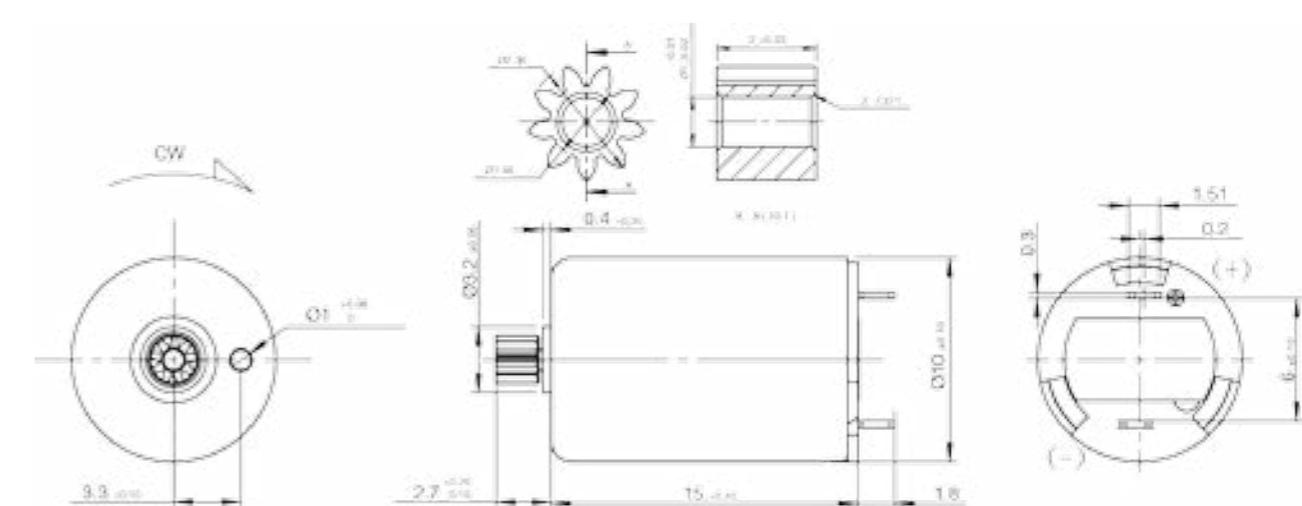


Metal Brush



unit	BCG1215008	BCG1220005					
	Pinion Gear	Pinion					
Standard Operating Conditions							
Nominal Voltage V	6.0	7.4					
Operating Range V	3.0~7.0	6.0~8.4					
Rated Load mNm	0.58	1.764					
Direction of Rotation	CW&CCW	CW&CCW					
Operating Temperature Range °C	-10~+60	-10~+60					
Storage Temperature Range °C	-20~+80	-20~+80					

Electrical Characteristic							
No-Load Current mA	80	50					
No-Load Speed rpm	27500	20000					
Rated Current mA	660	950					
Rated Speed rpm	19500	14000					
Stall Torque mNm	1.96	5.88					
Max. Starting Voltage V	0.5	0.3					
Max. Starting Current mA	2000	3000					
Rotor Resistance Ω	4.1	2.0					
Insulation Resistance Mohm	10	10					
Weight of Motor g	7.63	10.47					

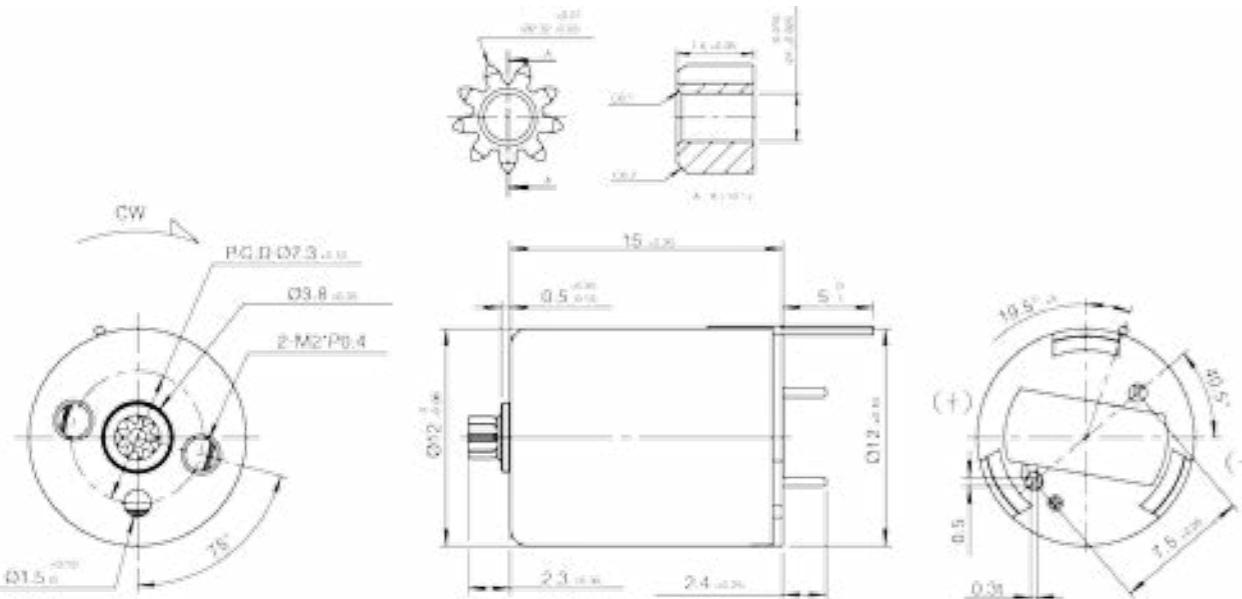


Metal Brush



unit	BEG1322001						
	Pinion Gear						
Standard Operating Conditions							
Nominal Voltage V	6.0						
Operating Range V	6.0~8.4						
Rated Load mNm	11767.97						
Direction of Rotation	CW & CCW						
Operating Temperature Range °C	-10~+60						
Storage Temperature Range °C	-20~+80						

Electrical Characteristic							
No-Load Current mA	15						
No-Load Speed rpm	8500						
Rated Current mA	-						
Rated Speed rpm	-						
Stall Torque mNm	15690.64						
Max. Starting Voltage V	0.3						
Max. Starting Current mA	0.2						
Rotor Resistance Ω	28						
Insulation Resistance Mohm	10						
Weight of Motor g	-						

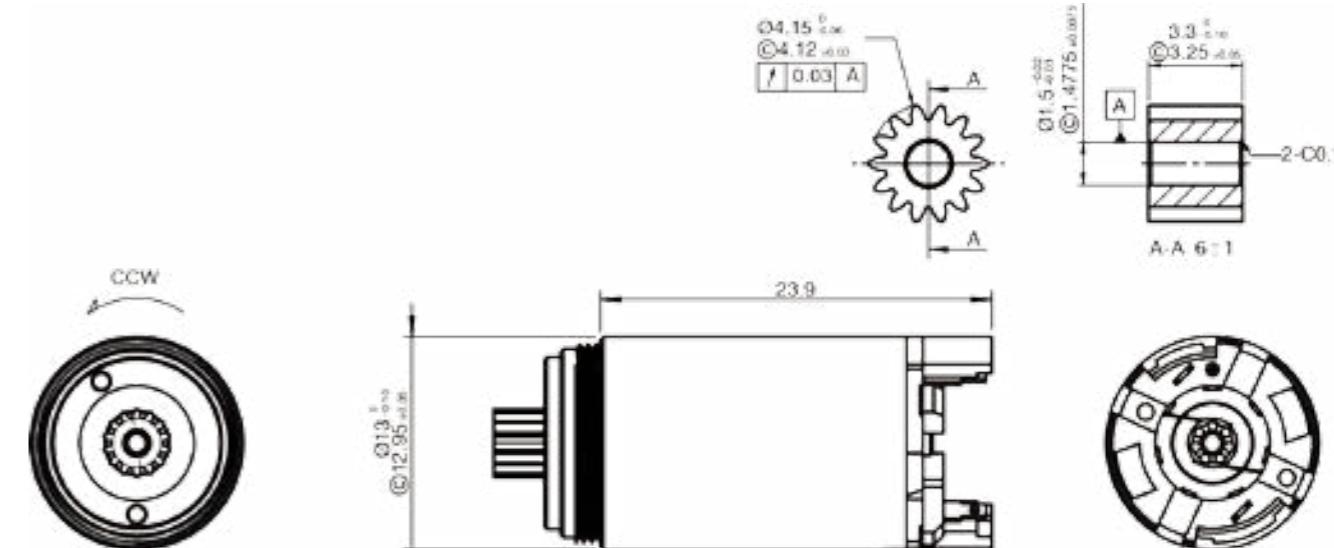


Metal Brush



unit	BCG1515001	BCG1519001				
	Pinion Gear	Pinion Gear				
Standard Operating Conditions						
Nominal Voltage V	7.4	3.0				
Operating Range V	6.0~8.4	2.5~4.5				
Rated Load mNm	8.4	2.3				
Direction of Rotation	CW&CCW	CW&CCW				
Operating Temperature Range °C	-10~+60	-10~+60				
Storage Temperature Range °C	-20~+80	-20~+80				

Electrical Characteristic						
No-Load Current mA	85	30				
No-Load Speed rpm	30000	6600				
Rated Current mA	420	70				
Rated Speed rpm	27800	6000				
Stall Torque mNm	6.86	0.9				
Max. Starting Voltage V	0.5	0.5				
Max. Starting Current mA	5000	800				
Rotor Resistance Ω	1.5	5.0				
Insulation Resistance Mohm	10	10				
Weight of Motor g	11.2	15.9				

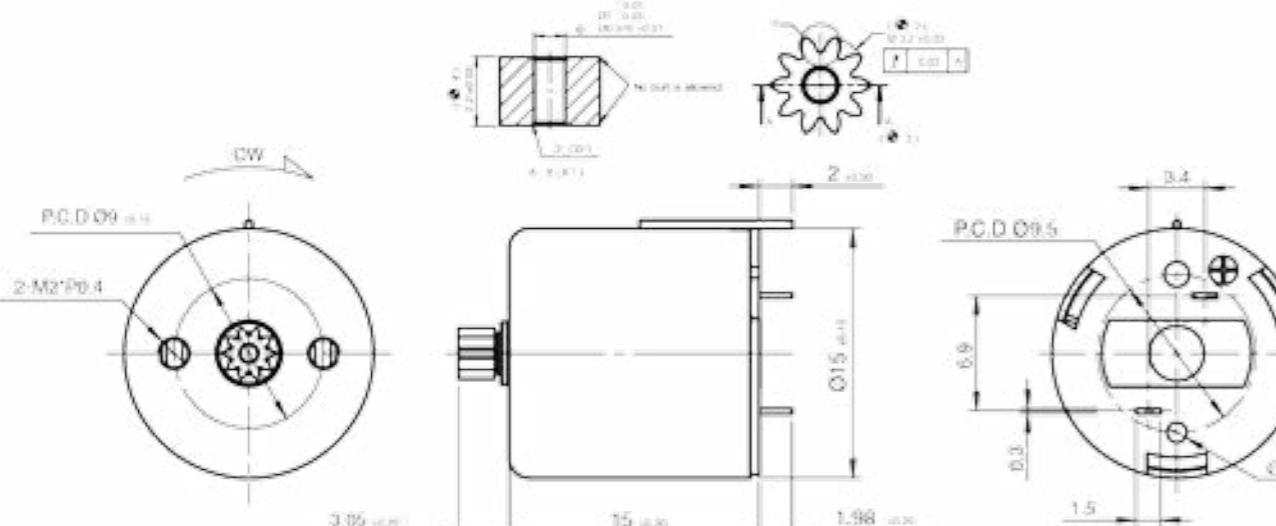


Metal Brush



unit	BCG1715010	BCG1718065	BCG1722008			
	Pinion Gear	Pinion Gear	Pinion Gear			
Standard Operating Conditions						
Nominal Voltage V	4.8	6.0	12.0			
Operating Range V	3.6~6.0	5.5~6.5	9.0~14.0			
Rated Load mNm	1.17	2.15	4.31			
Direction of Rotation	CW&CCW	CW&CCW	CW&CCW			
Operating Temperature Range °C	-10~+60	-10~+60	-10~+60			
Storage Temperature Range °C	-20~+80	-20~+80	-20~+80			


Electrical Characteristic						
No-Load Current mA	105	100	90			
No-Load Speed rpm	16000	19000	21000			
Rated Current mA	580	1070	1430			
Rated Speed rpm	11700	13100	16500			
Stall Torque mNm	3.92	8.3	20.58			
Max. Starting Voltage V	0.5	0.5	0.5			
Max. Starting Current mA	2200	3800	6500			
Rotor Resistance Ω	2.5	1.85	1.9			
Insulation Resistance Mohm	10	10	10			
Weight of Motor g	16	19.89	24.76			

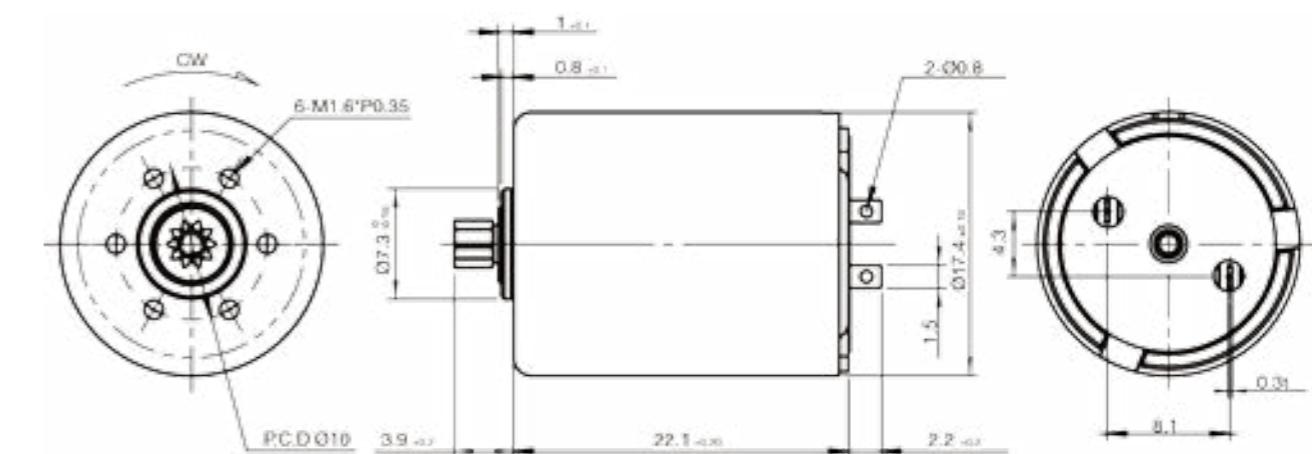


Metal Brush



unit	BCG2020002	BCG2020004					
	Pinion Gear	Pinion Gear					
Standard Operating Conditions							
Nominal Voltage V	12.0	7.4					
Operating Range V	11.0~13.0	6.0~8.4					
Rated Load mNm	6.76	5.88					
Direction of Rotation	CW&CCW	CW&CCW					
Operating Temperature Range °C	-10~+60	-10~+60					
Storage Temperature Range °C	-20~+80	-20~+80					
Electrical Characteristic							
No-Load Current mA	100	65					
No-Load Speed rpm	19500	17000					
Rated Current mA	1450	1800					
Rated Speed rpm	16500	12000					
Stall Torque mNm	22.54	19.6					
Max. Starting Voltage V	0.5	0.5					
Starting Current mA	6000	6200					
Rotor Resistance Ω	1.30	1.27					
Insulation Resistance Mohm	10	10					
Weight of Motor g	31.67	32					

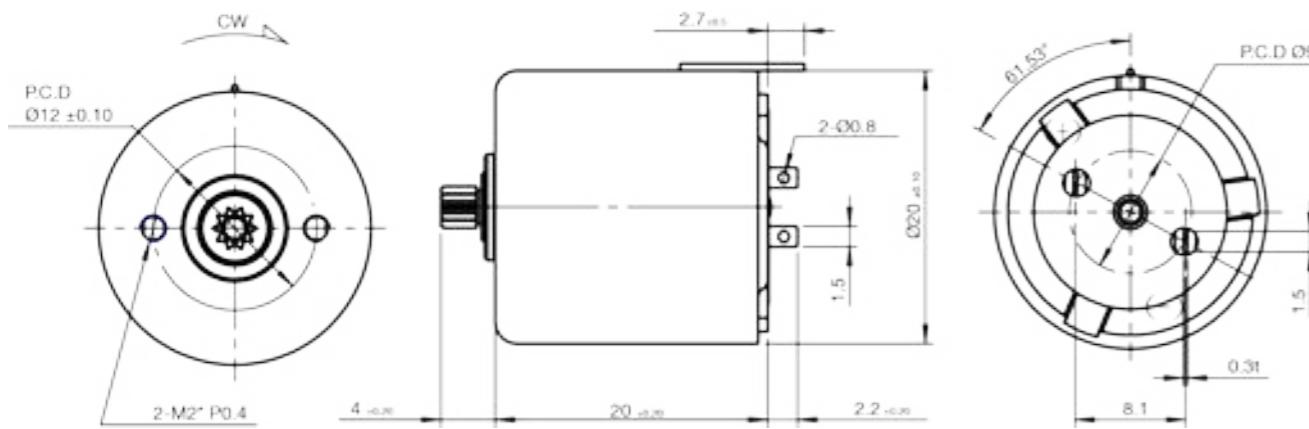

BRUSHLESS MOTOR

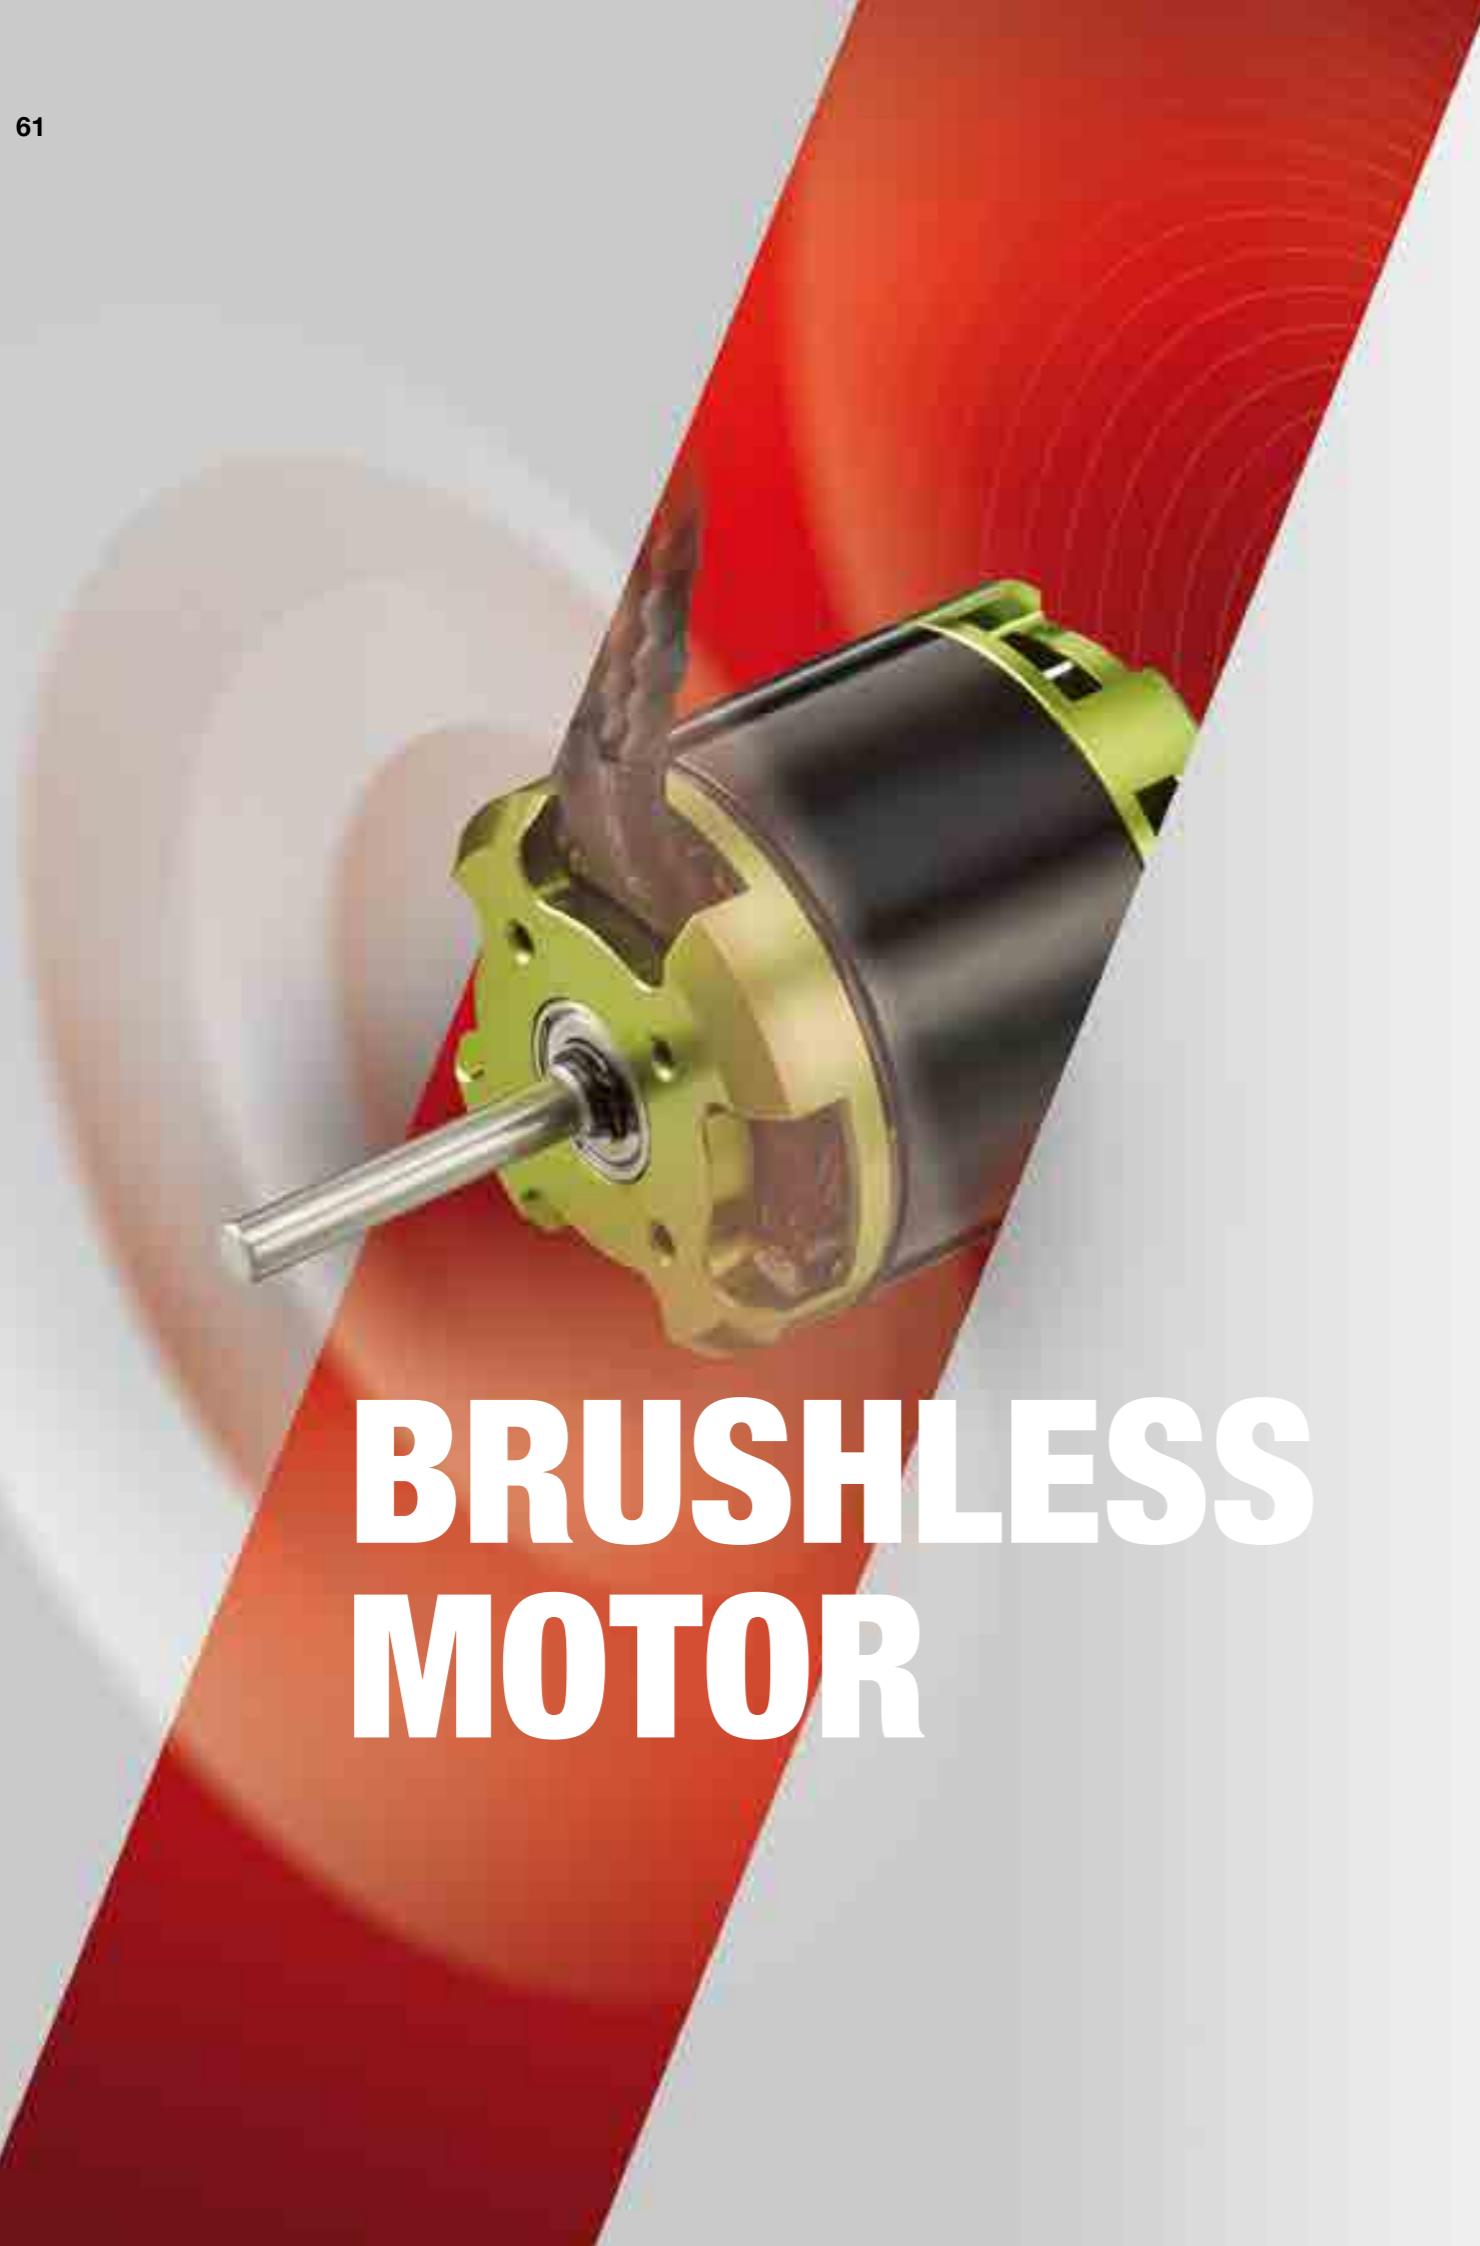


BRUSHLESS MOTOR | Ø20

Inner Type




unit	INA2040002					
Standard Operating Conditions						
Nominal Voltage	V	12				
Operating Range	V	7.4~12.6				
Direction of Rotation		CCW /CW				
Number of Phases		3				
Operating Temperature Range	°C	0~50				
Storage Temperature Range	°C	-20~60				
Electrical Characteristic						
No-Load Current	A	1.4				
No-Load Speed	rpm	45300				
Constant Torque	mNm/A	2.618				
Constant Speed	rpm/V	3800				
Stall Torque	mNm	273.5				
Stall Current	A	106.11				
Max. Output Power	W	320				
Max. Efficiency	%	81.8				
Weight of Motor	g	62				

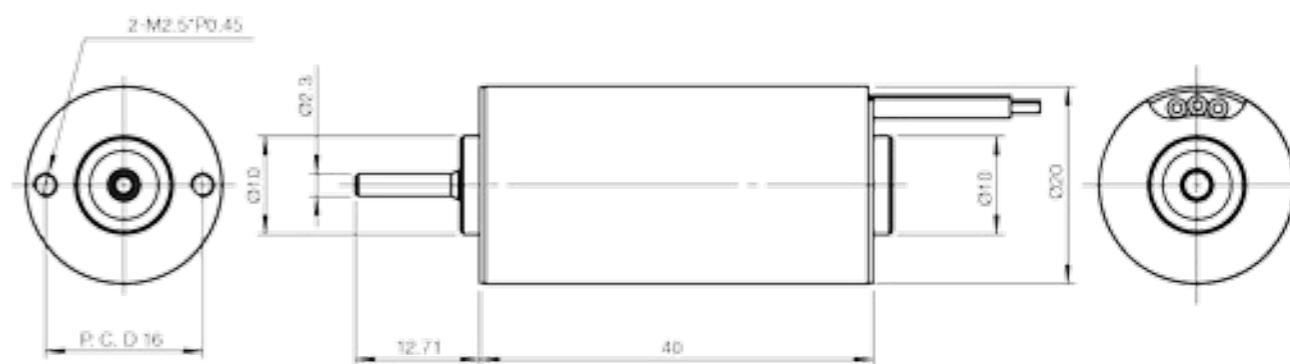

63 BRUSHLESS MOTOR | Ø22

Inner Type


unit	INA2236006							
Standard Operating Conditions								
Nominal Voltage	V	11.1						
Operating Range	V	7.4~12.6						
Direction of Rotation		CCW / CW						
Number of Phases		3						
Operating Temperature Range	°C	0~50						
Storage Temperature Range	°C	-20~60						
Electrical Characteristic								
No-Load Current	A	0.6						
No-Load Speed	rpm	44760						
Constant Torque	mAm/A	2.46						
Constant Speed	rpm/V	4000						
Stall Torque	mNm	189.9						
Stall Current	A	77.39						
Max. Output Power	W	222						
Max. Efficiency	%	87.4						
Weight of Motor	g	53						

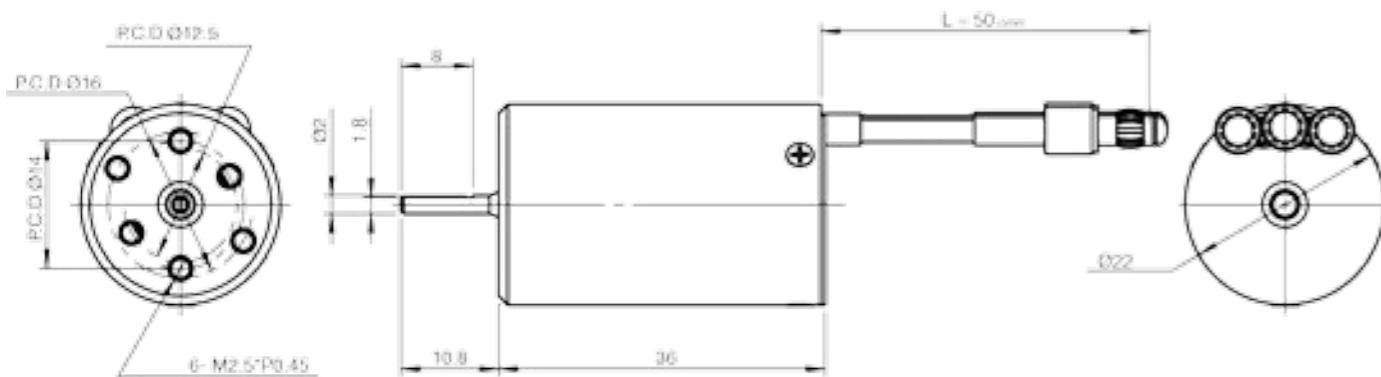

64 BRUSHLESS MOTOR | Ø28

Inner Type

unit	INA2848003							
Standard Operating Conditions								
Nominal Voltage	V	7.4						
Operating Range	V	7.4~12.6						
Direction of Rotation		CW/CCW						
Number of Phases		3						
Operating Temperature Range	°C	0~50						
Storage Temperature Range	°C	-20~60						
Electrical Characteristic								
No-Load Current	A	2.3						
No-Load Speed	rpm	30780						
Constant Torque	mNm/A	2.37						
Constant Speed	rpm/V	4100						
Stall Torque	mNm	498.3						
Stall Current	A	218.14						
Max. Output Power	W	400						
Max. Efficiency	%	81.7						
Weight of Motor	g	135						

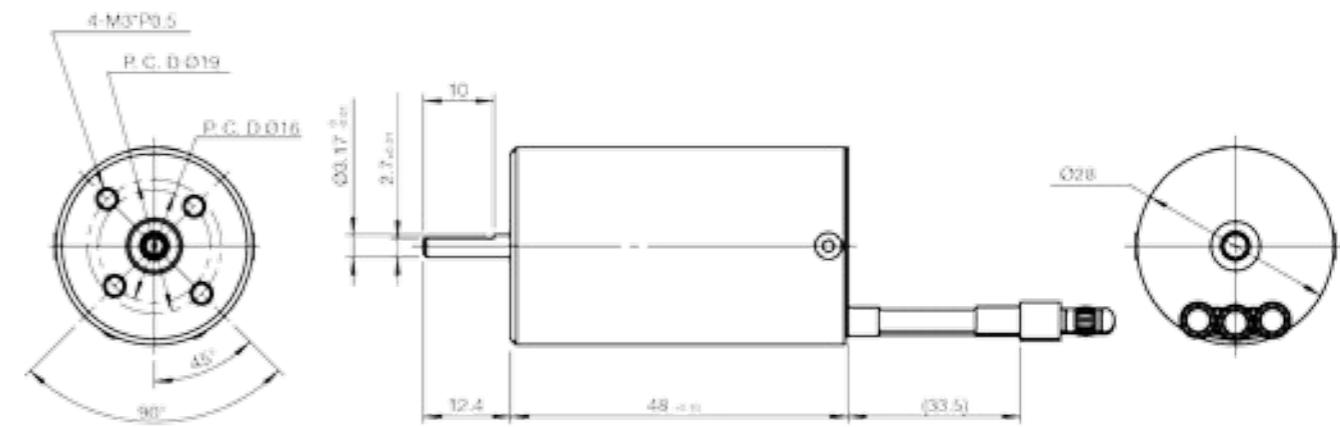


65 BRUSHLESS MOTOR | Ø36

Inner Type

unit	INA3650002	INA3650019	INA3361003				
Standard Operating Conditions							
Nominal Voltage V	7.4	7.4	11.1				
Operating Range V	7.4~12.6	7.4~16.8	11.1~16.8				
Direction of Rotation	CW/CCW	CW/CCW	CW/CCW				
Number of Phases	3	3	3				
Operating Temperature Range °C	0~50	0~50	0~50				
Storage Temperature Range °C	-20~60	-20~60	-20~60				


Electrical Characteristic							
No-Load Current A	2	2.1	0.9				
No-Load Speed rpm	25440	37260	18462				
Constant Torque mNm/A	2.82	1.92	5.87				
Constant Speed rpm/V	3500	5000	1700				
Stall Torque mNm	492	353.2	1095.7				
Stall Current A	180.39	187.30	188.90				
Max. Output Power W	327	344	528				
Max. Efficiency %	80.2	81.2	88.2				
Weight of Motor g	220	183	265				

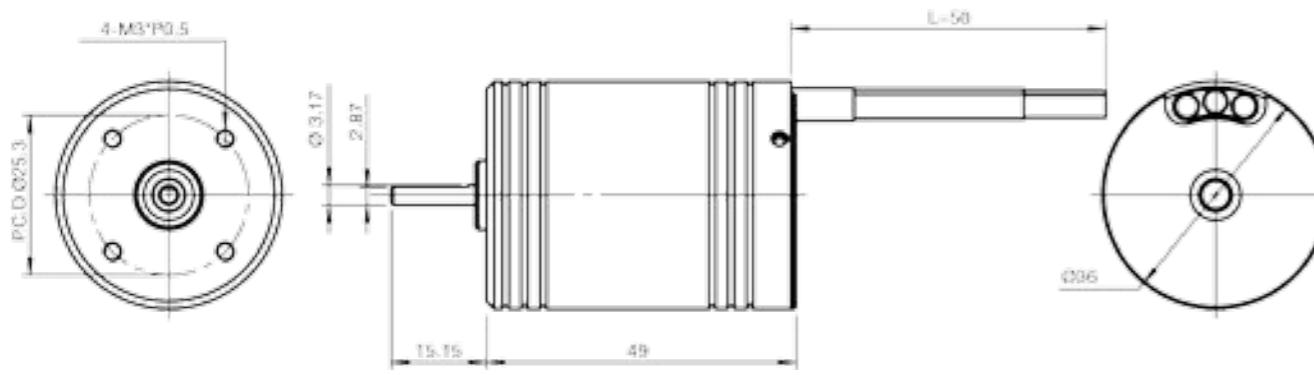

66 BRUSHLESS MOTOR | Ø29

Outer Type

unit	OMA2940001	OMA2940002					
Standard Operating Conditions							
Nominal Voltage V	11.1	11.1					
Operating Range V	7.4~14.8	7.4~14.8					
Direction of Rotation	CW/CCW	CW/CCW					
Number of Phases	3	3					
Operating Temperature Range °C	0~50	0~50					
Storage Temperature Range °C	-20~60	-20~60					

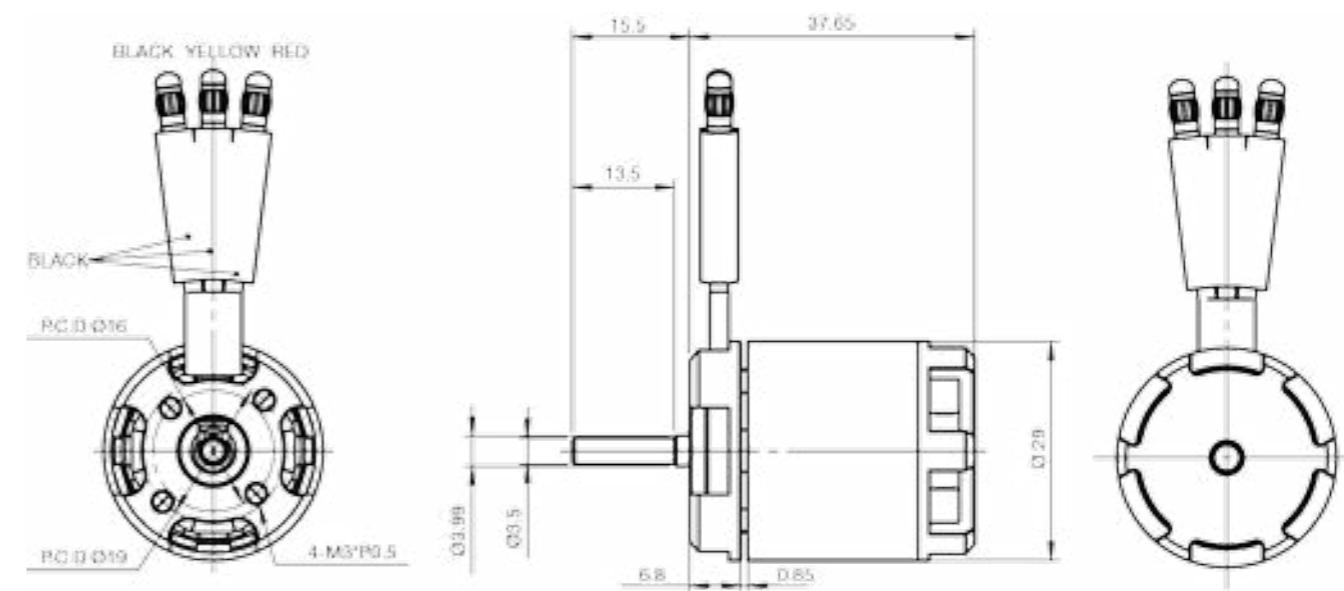


67 BRUSHLESS MOTOR | Ø37

Outer Type

unit	OMA3750002	OMA3750008	OMA3750009				
Standard Operating Conditions							
Nominal Voltage V	22.2	22.2	22.2				
Operating Range V	11.1~22.2	11.1~22.2	11.1~22.2				
Direction of Rotation	CW/CCW	CW/CCW	CW/CCW				
Number of Phases	3	3	3				
Operating Temperature Range °C	0~50	0~50	0~50				
Storage Temperature Range °C	-20~60	-20~60	-20~60				

unit	OMA3750002	OMA3750008	OMA3750009				
Electrical Characteristic							
No-Load Current A	5.3	6.6	4.9				
No-Load Speed rpm	29400	31350	27000				
Constant Torque mNm/A	81	70	88				
Constant Speed rpm/V	1300	1600	1200				
Stall Torque mNm	3430	2415	2815				
Stall Current A	425	353	325				
Max. Output Power W	9435	7837	7215				
Max. Efficiency %	89	85	86				
Weight of Motor g	198	195	187				

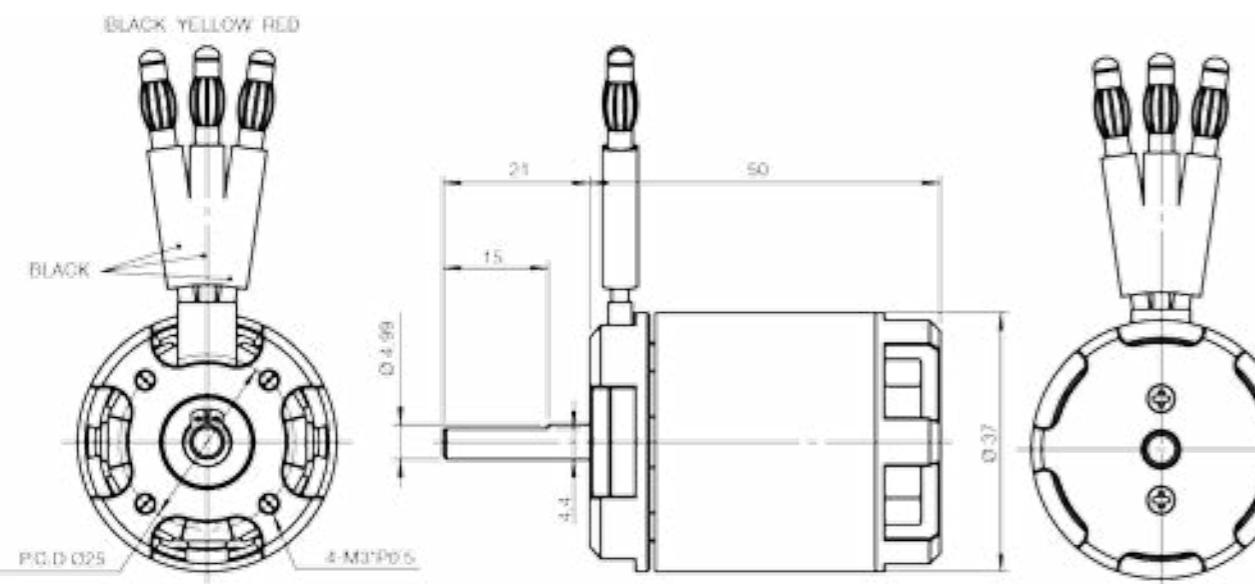


68 BRUSHLESS MOTOR | Ø40

Outer Type

unit	OMA4050013	OMA4050017	OMA4050018				
Standard Operating Conditions							
Nominal Voltage V	22.2	22.2	22.2				
Operating Range V	11.1~22.2	11.1~22.2	11.1~22.2				
Direction of Rotation	CW/CCW	CW/CCW	CW/CCW				
Number of Phases	3	3	3				
Operating Temperature Range °C	0~50	0~50	0~50				
Storage Temperature Range °C	-20~60	-20~60	-20~60				


unit	OMA4050013	OMA4050017	OMA4050018				
Electrical Characteristic							
No-Load Current A	6.2	9.2	5.3				
No-Load Speed rpm	28500	31824	26250				
Constant Torque mNm/A	81	67	89				
Constant Speed rpm/V	1300	1600	1200				
Stall Torque mNm	3430	3706	3221				
Stall Current A	427	475	364				
Max. Output Power W	9479	10545	8081				
Max. Efficiency %	84	82	85				
Weight of Motor g	215	215	214				

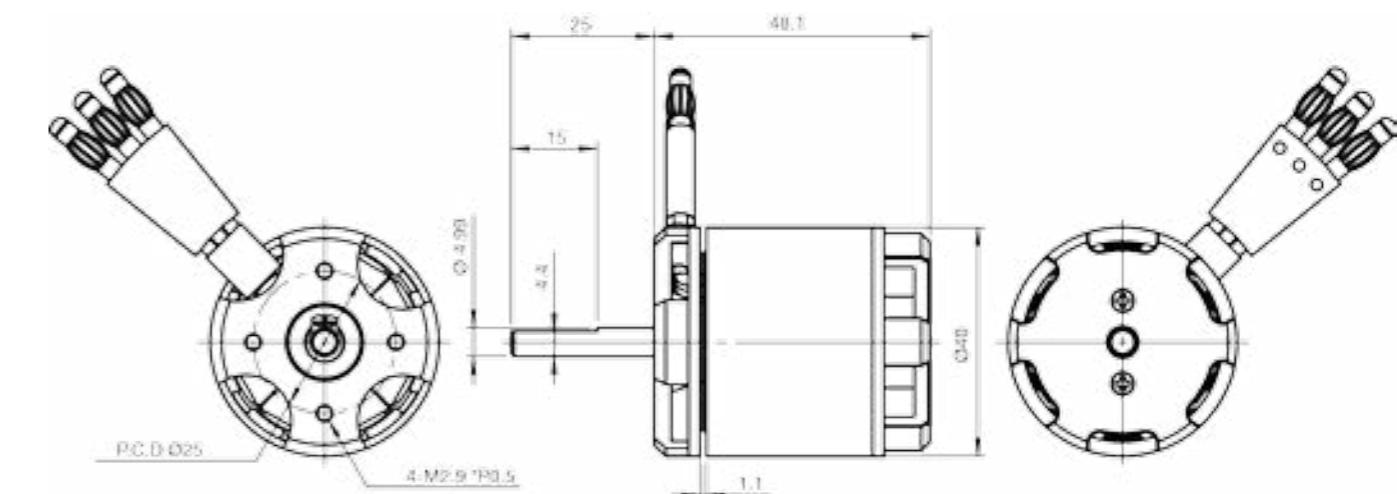

69 BRUSHLESS MOTOR | Ø47

Outer Type


unit	OMA4750001	OMA4760002	OMA476003	OMA476004	OMA476005		
Standard Operating Conditions							
Nominal Voltage V	22.2	22.2	44.4	46	44.4		
Operating Range V	11.1~22.2	11.1~22.2	11.1~44.4	11.1~46	11.1~44.4		
Direction of Rotation	CW/CCW	CW/CCW	CW/CCW	CW/CCW	CW/CCW		
Number of Phases	3	3	3	3	3		
Operating Temperature Range °C	0~50	0~50	0~50	0~50	0~50		
Storage Temperature Range °C	-20~+60	-20~+60	-20~+60	-20~+60	-20~+60		
Electrical Characteristic							
No-Load Current A	6	9.3	3.1	3.3	3.1		
No-Load Speed rpm	25650	26694	21900	24552	21900		
Constant Torque mNm/A	91	89	211	200	211		
Constant Speed rpm/V	1200	1200	500	530	530		
Stall Torque mNm	1528	4560	8728	8822	8729		
Stall Current A	168	517	414	442	414		
Max. Output Power W	3730	11477	18382	20332	18382		
Max. Efficiency %	76	85	90	92	90		
Weight of Motor g	272	339	339	335	339		

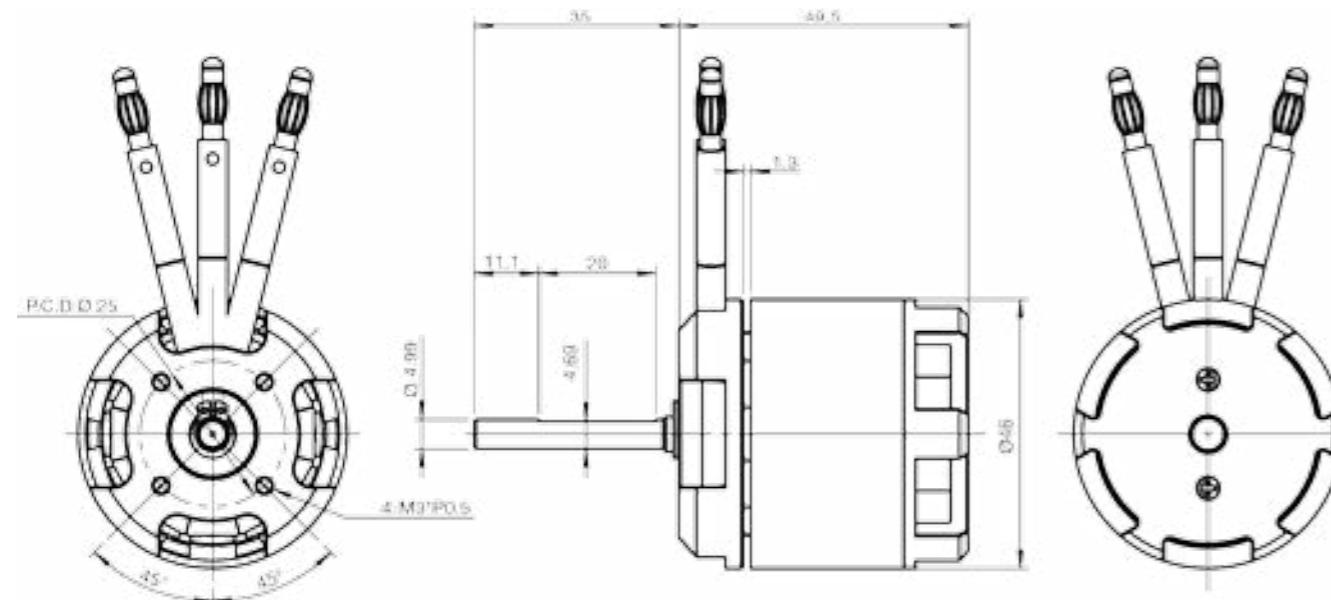


70 BRUSHLESS MOTOR | Ø50

Outer Type

unit	OMA5055015	OMA5065013	OMA50605014	OMA5065017	OMA5065018		
Standard Operating Conditions							
Nominal Voltage V	46	44.4	46	46	46		
Operating Range V	22.2~46	22.2~44.4	11.1~46	11.1~46	11.1~46		
Direction of Rotation	CW/CCW	CW/CCW	CW/CCW	CW/CCW	CW/CCW		
Number of Phases	3	3	3	3	3		
Operating Temperature Range °C	0~50	0~50	0~50	0~50	0~50		
Storage Temperature Range °C	-20~+60	-20~+60	-20~+60	-20~+60	-20~+60		
Electrical Characteristic							
No-Load Current A	3.9	3.3	4.2	4.7	5.3		
No-Load Speed rpm	25650	20400	22500	23994	24864		
Constant Torque mNm/A	178	170	202	189	186		
Constant Speed rpm/V	550	450	500	530	550		
Stall Torque mNm	9140	5140	11333	19277	13876		
Stall Current A	513	303	569	1035	751		
Max. Output Power W	23598	13453	26174	47610	34546		
Max. Efficiency %	86	65	85	87	87		
Weight of Motor g	347	443	463	467	455		

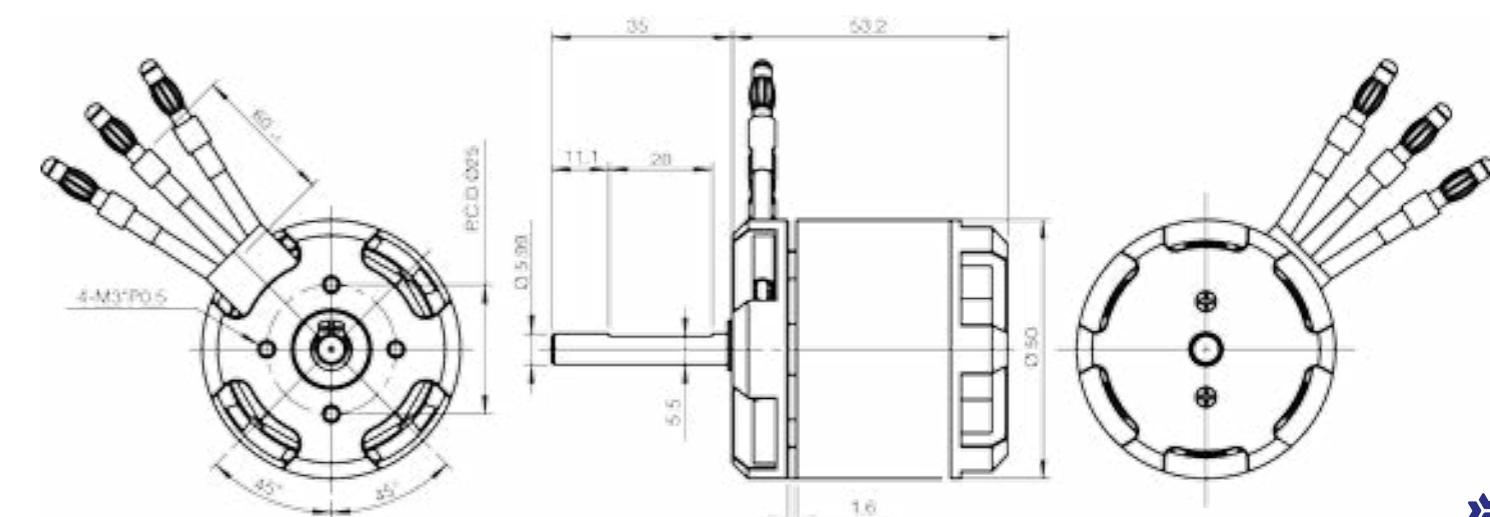

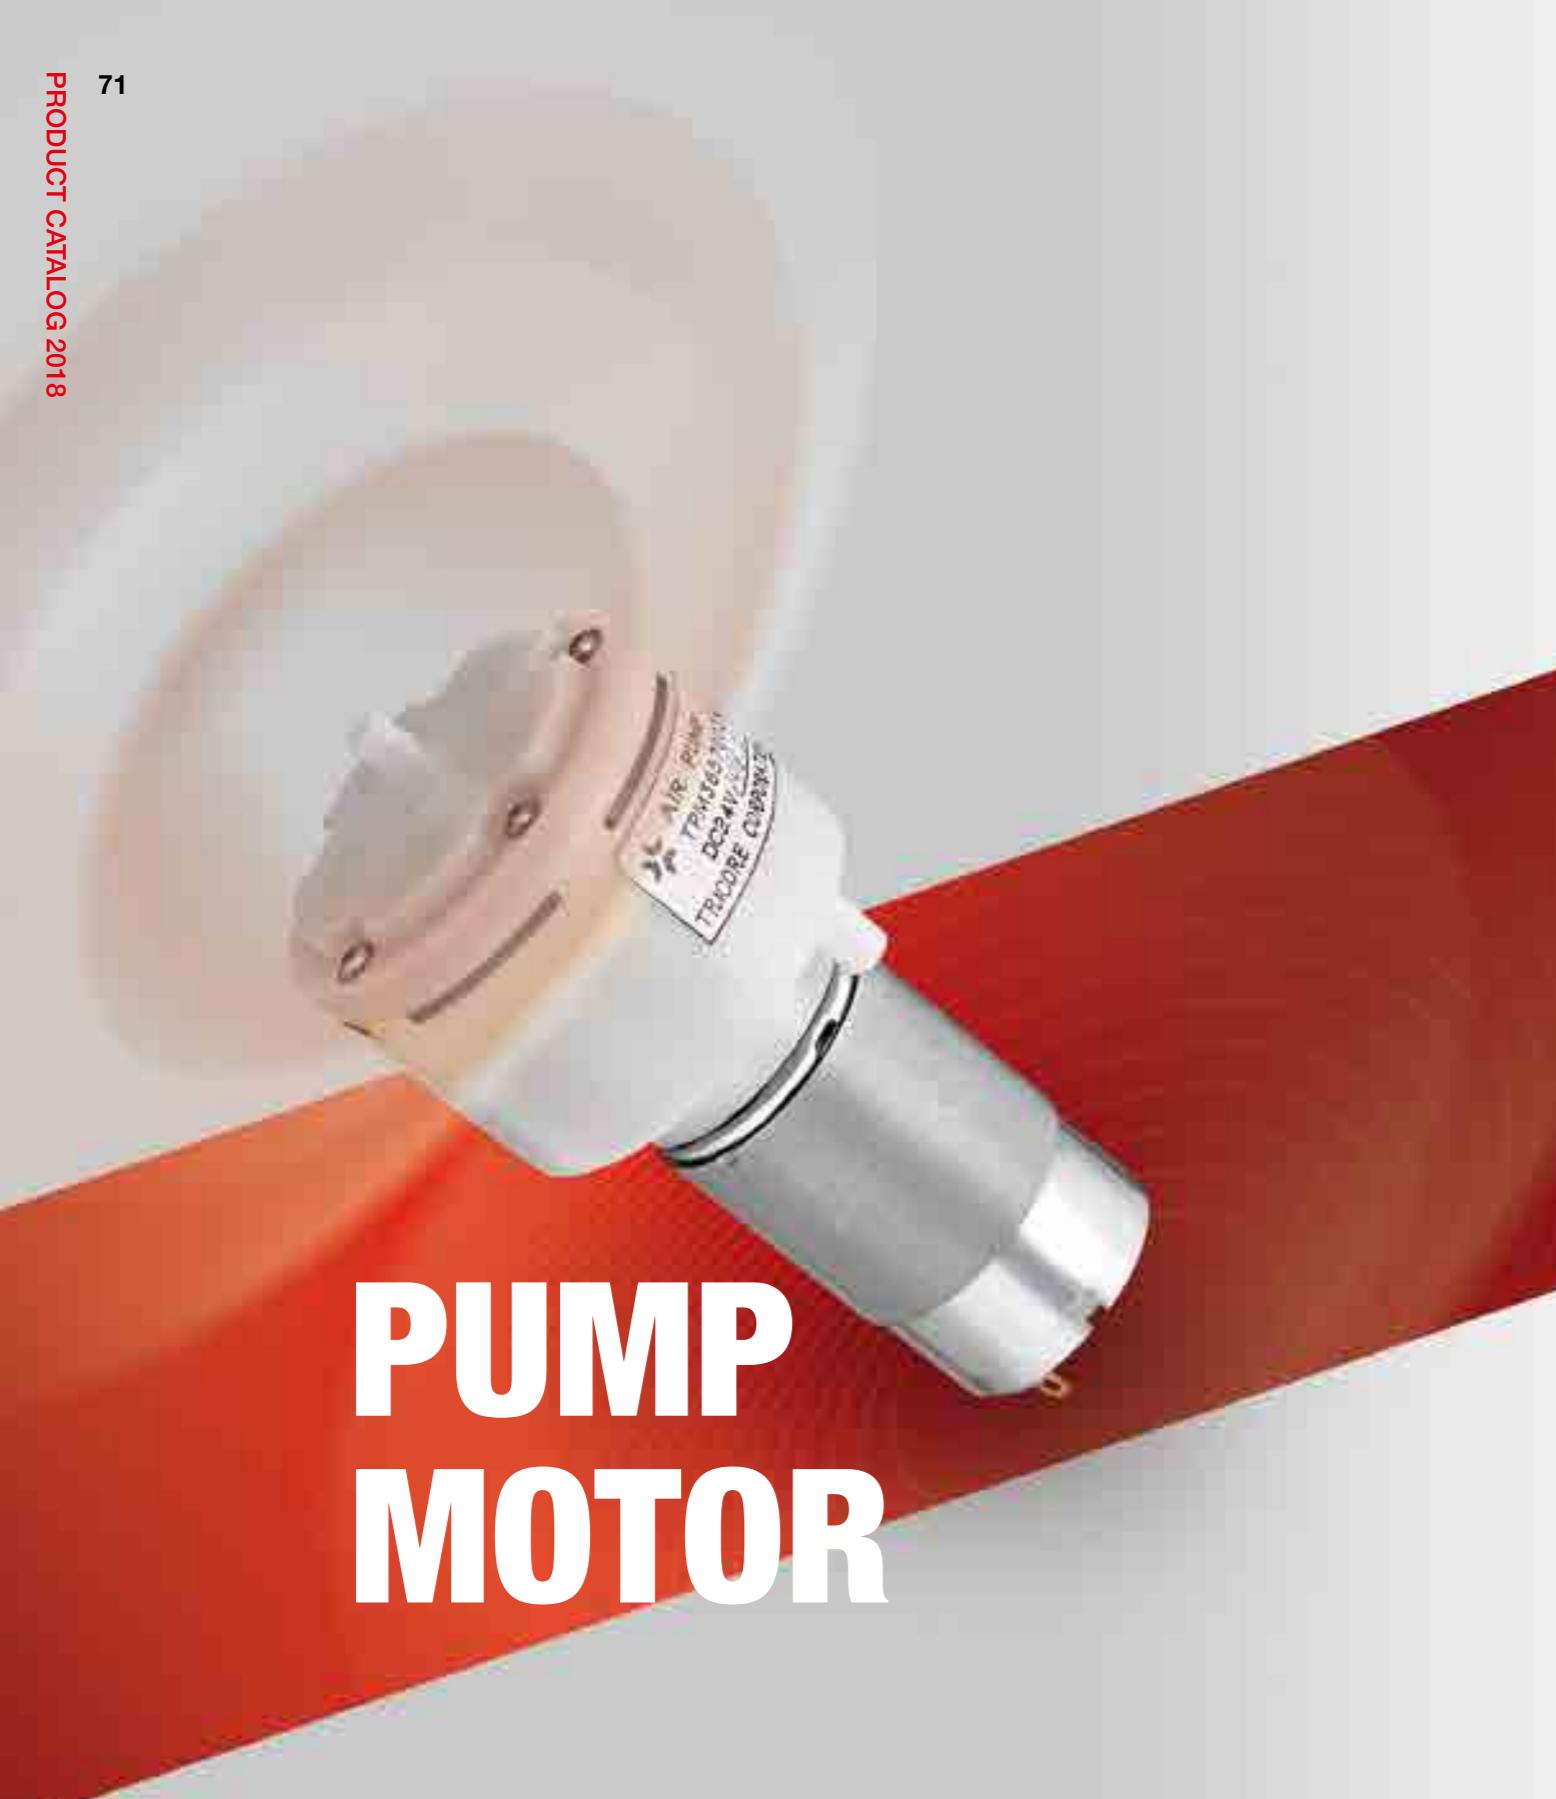


PUMP MOTOR | Ø14

Air Type




unit	TPM142002					
Parameters						
Nominal Voltage	V	3				
Medium		Air				
Free Flow	ml/min	>800				
Max. Current	mA	<400				
Max. Pressure	mmHg	>350				
Noise	dB	<65				
Others						
Life Test	30,000 times (DC3V; 1cycle: connect to a 100cc pneumatic cylinder on 9s, off 5s)					
Working Environment	-20~60°C, 80%RH					

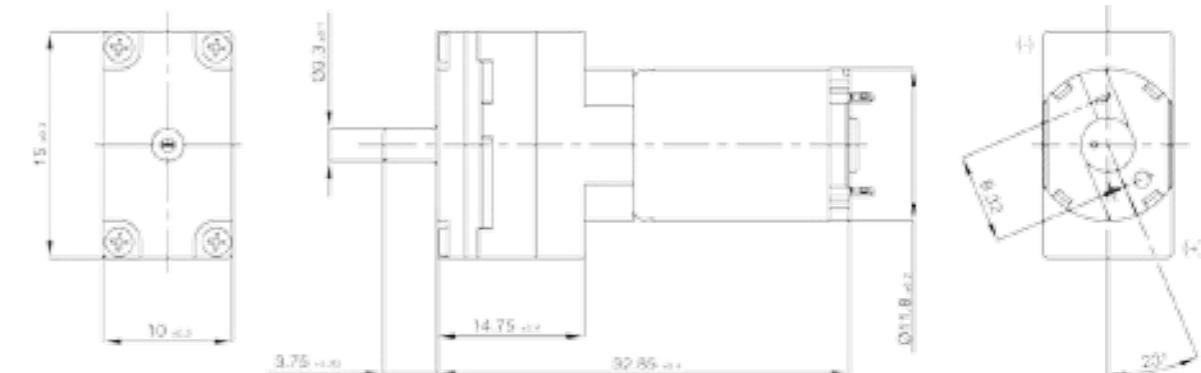

73 PUMP MOTOR | Ø27

Air Type


unit	BPO2430019							
Parameters								
Nominal Voltage	V	6						
Medium		Air						
Free Flow	ml/min	>1600						
Max. Current	mA	<400						
Max. Pressure	mmHg	>400						
Noise	dB	<55						
Others								
Life Test	30,000 times (DC3V; 1cycle: connect to a 500cc pneumatic cylinder on 9s, off 8s)							
Working Environment	-20~60°C, 80%RH							

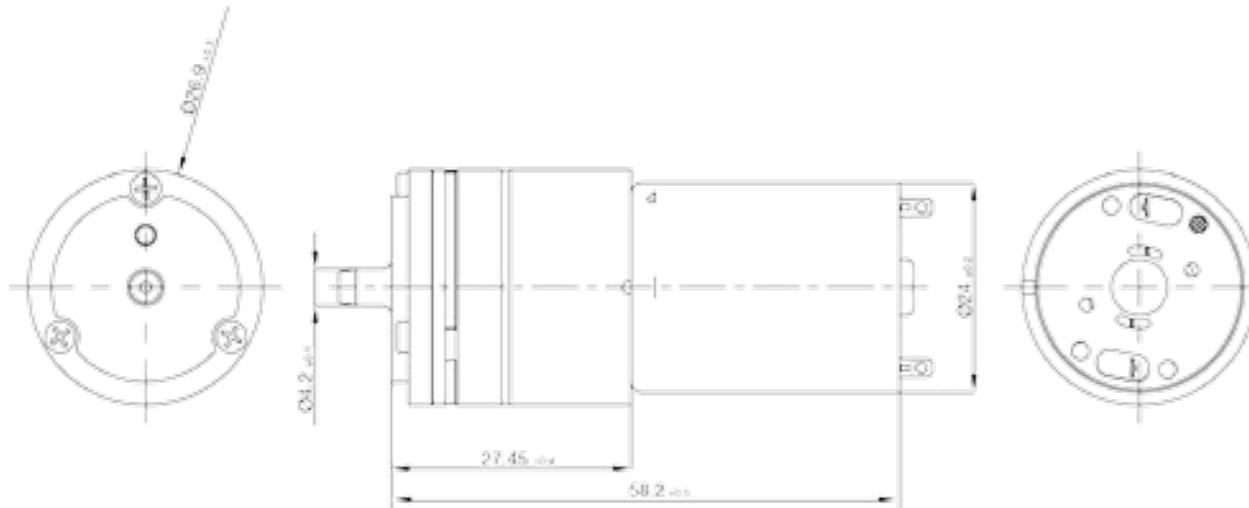

74 PUMP MOTOR | Ø32

Air Type


unit	TPM3261001							
Parameters								
Nominal Voltage	V	12						
Medium		Air						
Free Flow	ml/min	>3500						
Max. Current	mA	<390						
Max. Pressure	mmHg	>450						
Noise	dB	<65						
Others								
Life Test	50,000 times (DC12V; 1cycle: connect to a 500cc pneumatic cylinder on 9s, off 8s)							
Working Environment	-20~60°C, 80%RH							

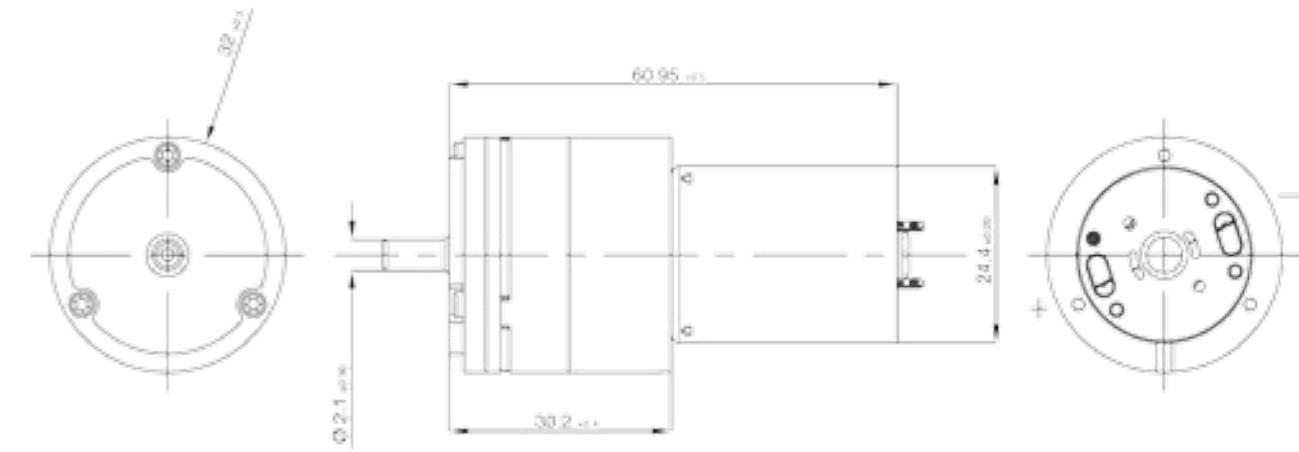

75 PUMP MOTOR | Ø36

Air Type


unit	TPM3657001	TPM3657003						
Parameters								
Nominal Voltage	V	12	24					
Medium		Air	Air					
Free Flow	ml/min	>15000	>15000					
Max. Current	mA	<15000	<800					
Max. Pressure	mmHg	>500	>500					
Noise	dB	<65	<65					
Others								
Life Test	100,000 times (DC12V; 1cycle: connect to a 1500cc pneumatic cylinder on 4s, off4s)							
Working Environment	-20~60°C, 80%RH							

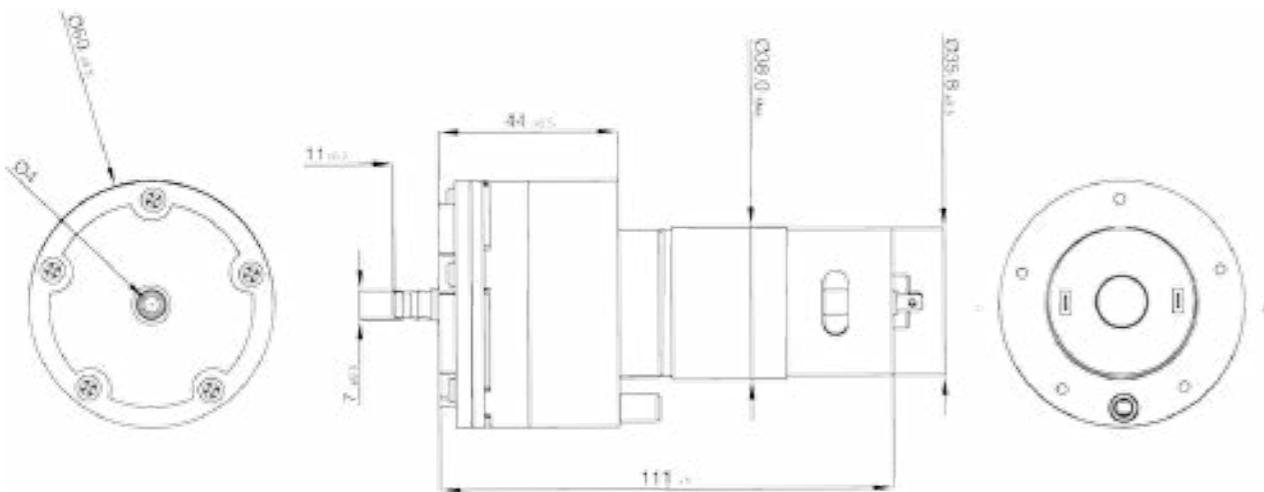

76 PUMP MOTOR | Ø27

Water Type


unit	TPW2761011	TPW2761007	TPW2700001	TPW2761035				
Parameters								
Nominal Voltage	V	12	12	12	3			
Medium		Water	Water	Water	Water			
Free Flow	ml/min	870	1000	1500	440			
Max. Current	mA	500	600	750	320			
Max. Pressure	Bar	>2	>2	>2	-			
Noise	dB	<60	<65	<65	<60			
Others								
Life Test	6000 times (DC3/12V; 1cycle: on 2min, off 1min)							
Working Environment	0~50°C, 75%RH							

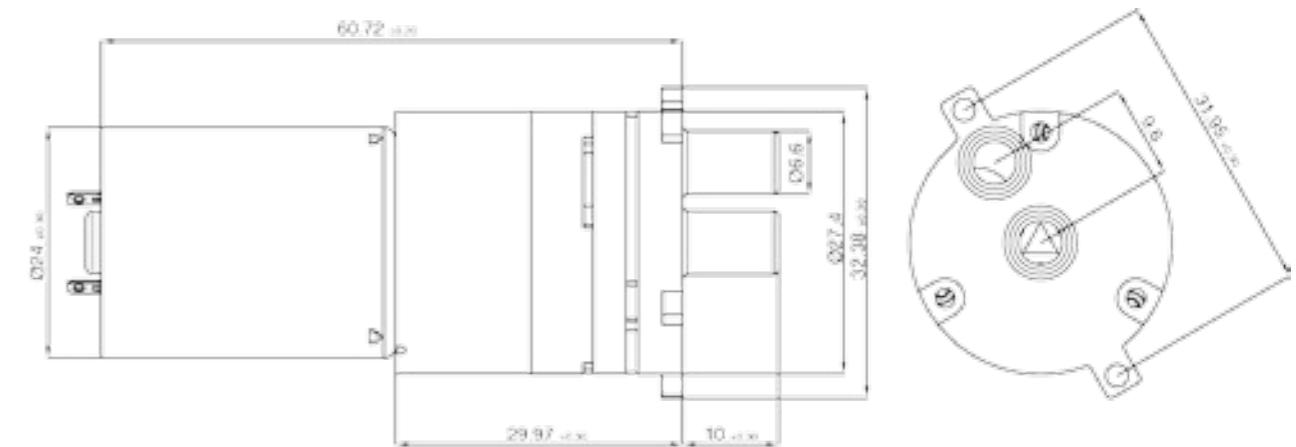

77 PUMP MOTOR | Ø27

Water Type


unit	TPW2761012	TPM2761017					
Parameters							
Nominal Voltage	V	12	18				
Medium		Water	Water				
Free Flow	ml/min	>1000	410				
Max. Current	mA	<1000	<600				
Max. Pressure	Bar	>2	-				
Noise	dB	<65	<65				
Others							
Life Test	10,000 times (DC12V/18V; 1cycle: on 1min, off 1min)						
Working Environment	0~95°C, 80%RH						

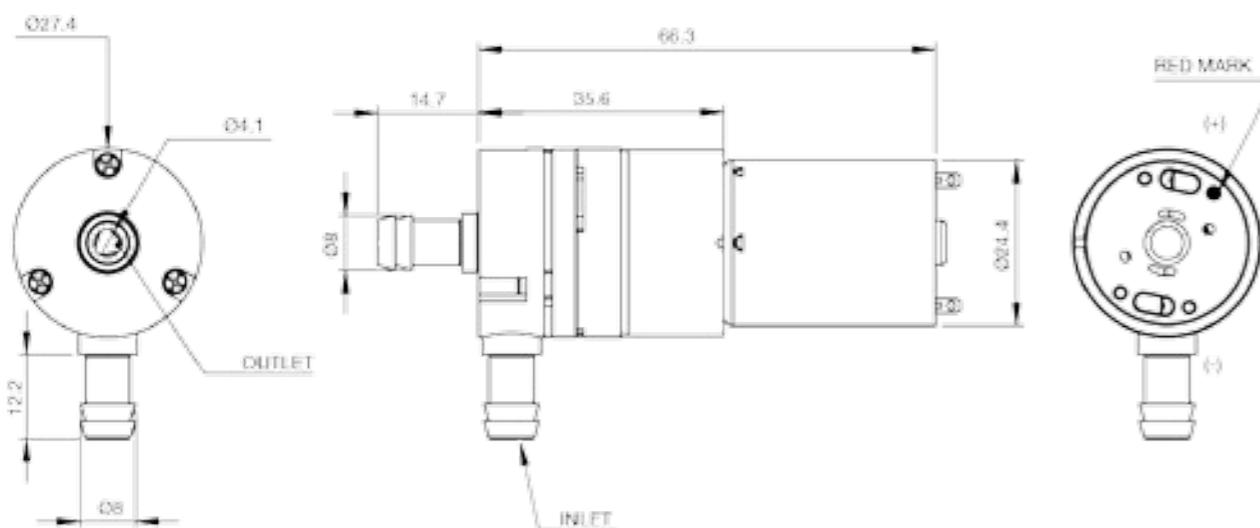

78 PUMP MOTOR | Ø27

Water Type

unit	TPW2761015	TPW2761016	TPW2761025	TPW27610024	TPW2761001	TPW2761019
Parameters						
Nominal Voltage	V	12	12	12	24	24
Medium		Water	Water	Water	Water	Water
Free Flow	ml/min	620	450	620	700	700
Max. Current	mA	280	200	280	350	150
Max. Pressure	Bar	>2	>0.5	>2	>2.5	>2.5
Noise	dB	<55	<55	<55	<60	<60
Others						
Life Test	10,000 times (DC12V / 24V; 1cycle: on 2min, off 1min)					
Working Environment	0~95°C, 75%RH					


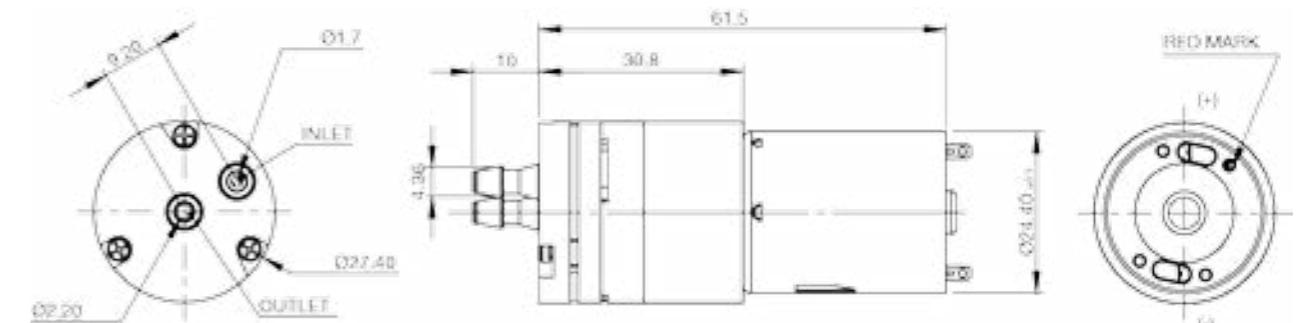


79 PERISTALTIC PUMP MOTOR | Ø28


Water Type



unit	TPV2861001
Parameters	
Nominal Voltage	V 6
Medium	Water
Free Flow	ml/min 80~110
Max. Current	mA <500
Max. Pressure	Bar >1
Noise	dB <60
Others	
Life Test	200,000 times (DC6V; 1cycle: on 3s, off4s)
Working Environment	0~60°C, 80%RH

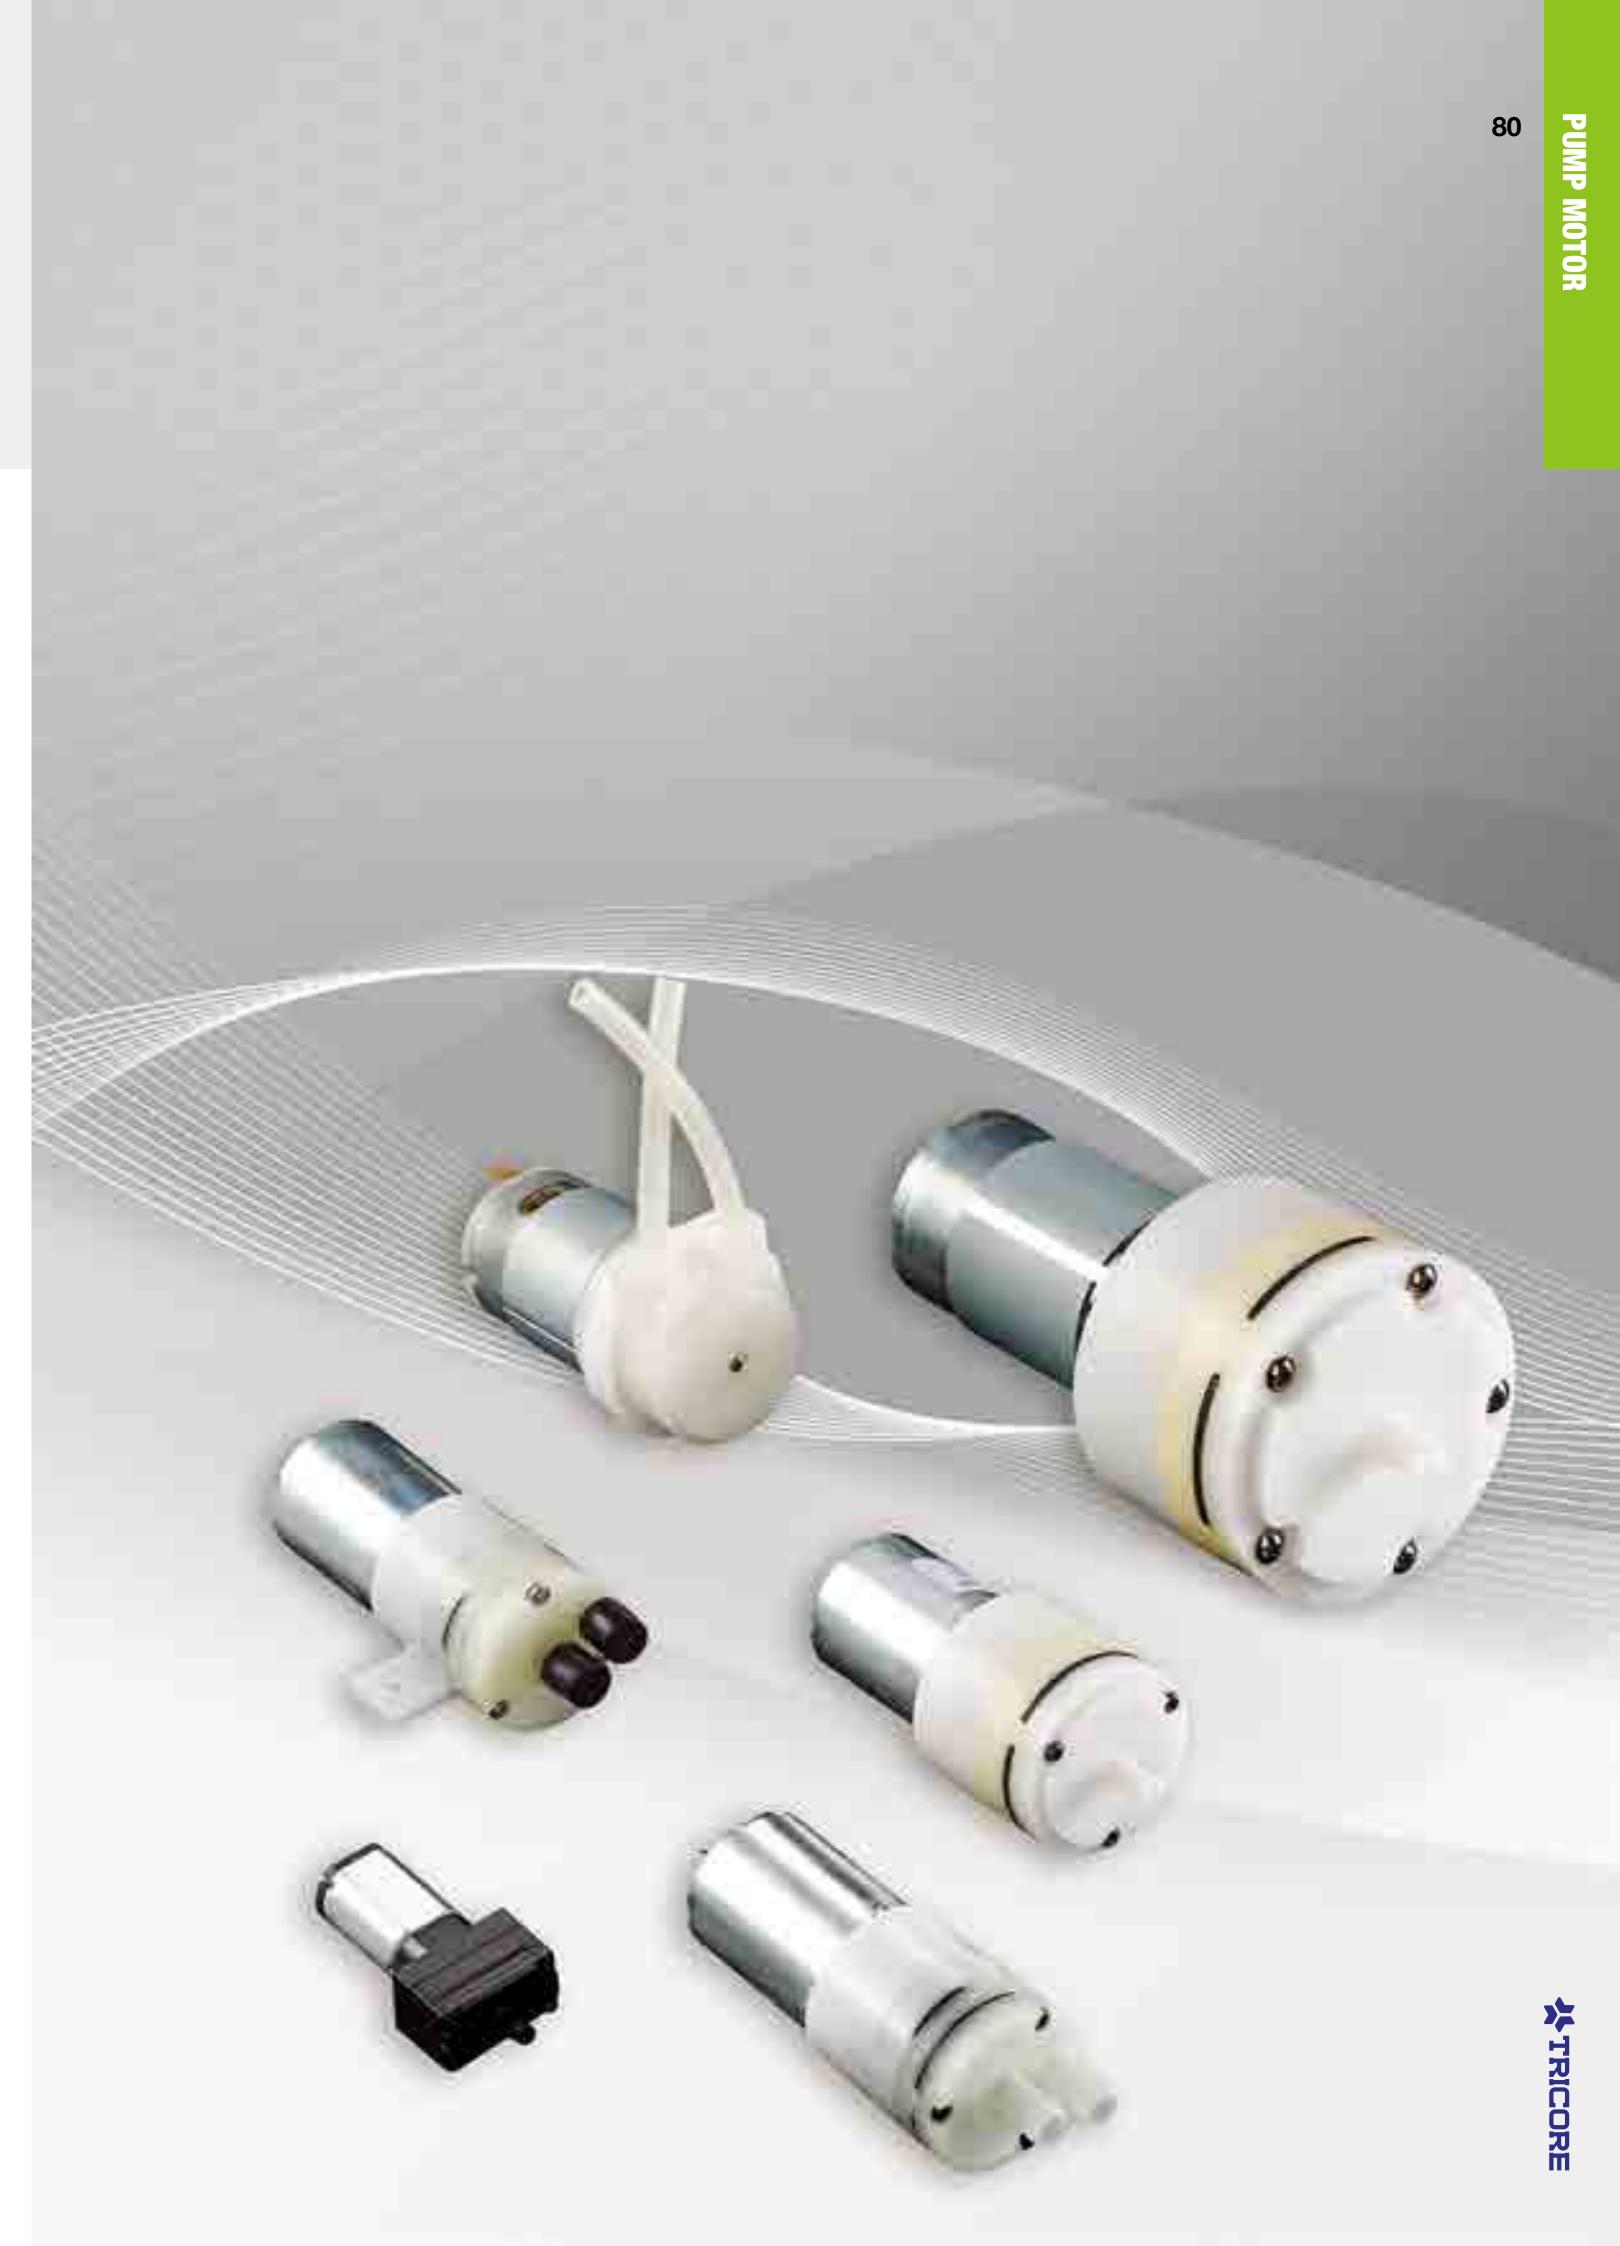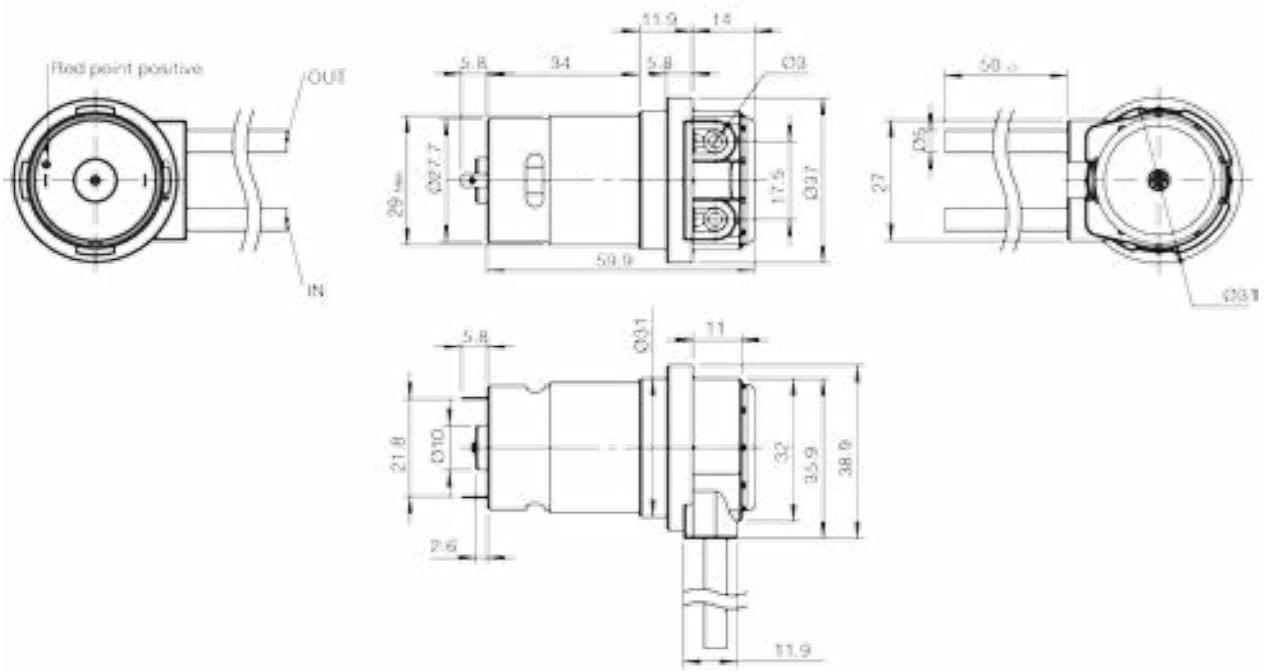


OPTICAL PART

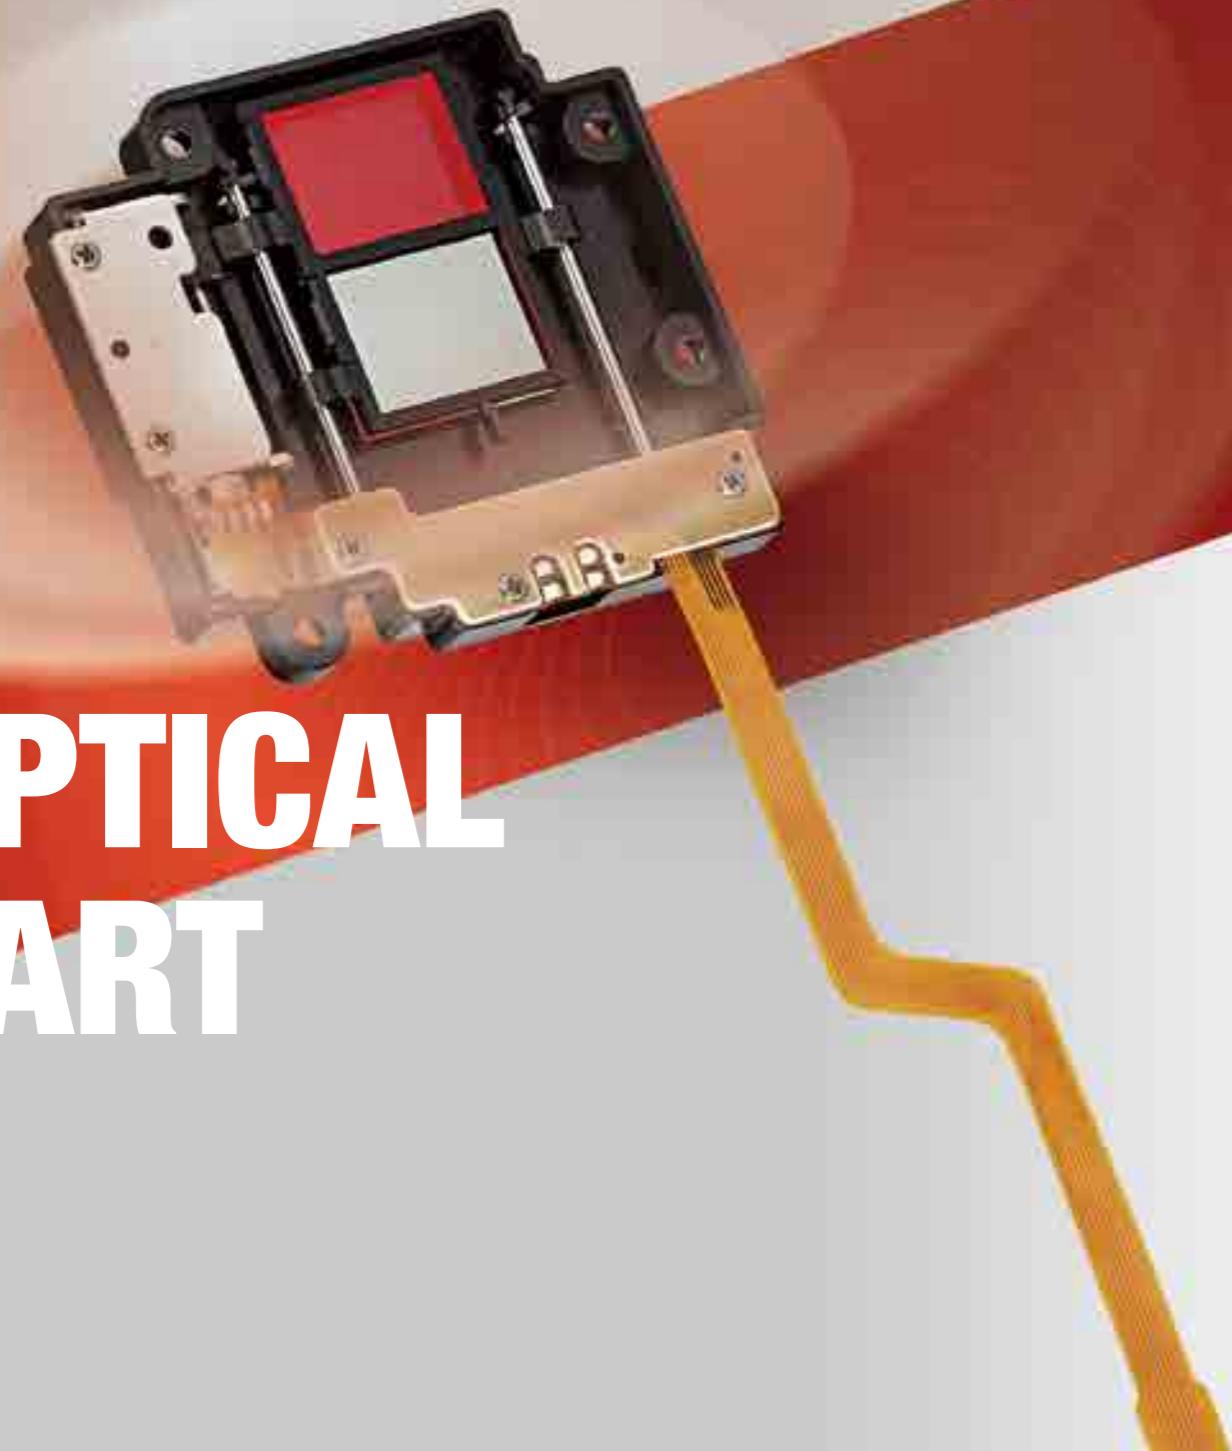

OPTICAL PART **IRIS**




unit	PSI0700032	PSI32000041	PSI1800004				
	SA23210	SA23141	SA23224X				
Electrical Characteristic							
Max. Open Voltage V	3.0	3.0	3.5				
Min. Close Voltage V	0.5	0.5	0.5				
Driving Voltage V	6	6	6				
Braking Resistance Ω	190	190	190				
Driving Resistance Ω	465	560	465				
Main Characteristic							
Engine Type	Solenoid	Solenoid	Solenoid				
Driving Mode	-	-	-				
Aperture Diameter mm	6.7	7.0	20.1				

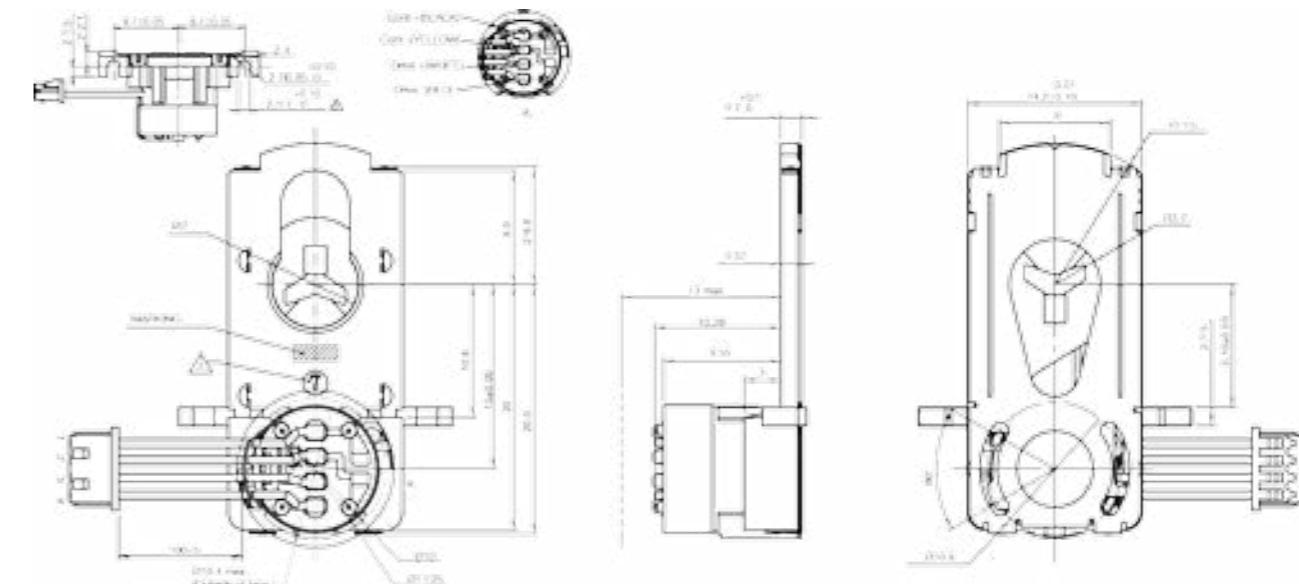

Precise-IRIS




unit	AON110001	AON160001	AON090009				
	PI020	PI021	PI031				
Electrical Characteristic							
Voltage	V	3.3	3.3	3.3			
Driving Voltage	V	3.3	3.3	3.3			
Resistance	Ω	30	30	28.5			
Main Characteristic							
Engine Type	Solenoid	Stepping Motor	Solenoid				
Driving Mode	2-2	2-2	2-2				
Aperture Diameter	mm	11.4	16.0	8.0			

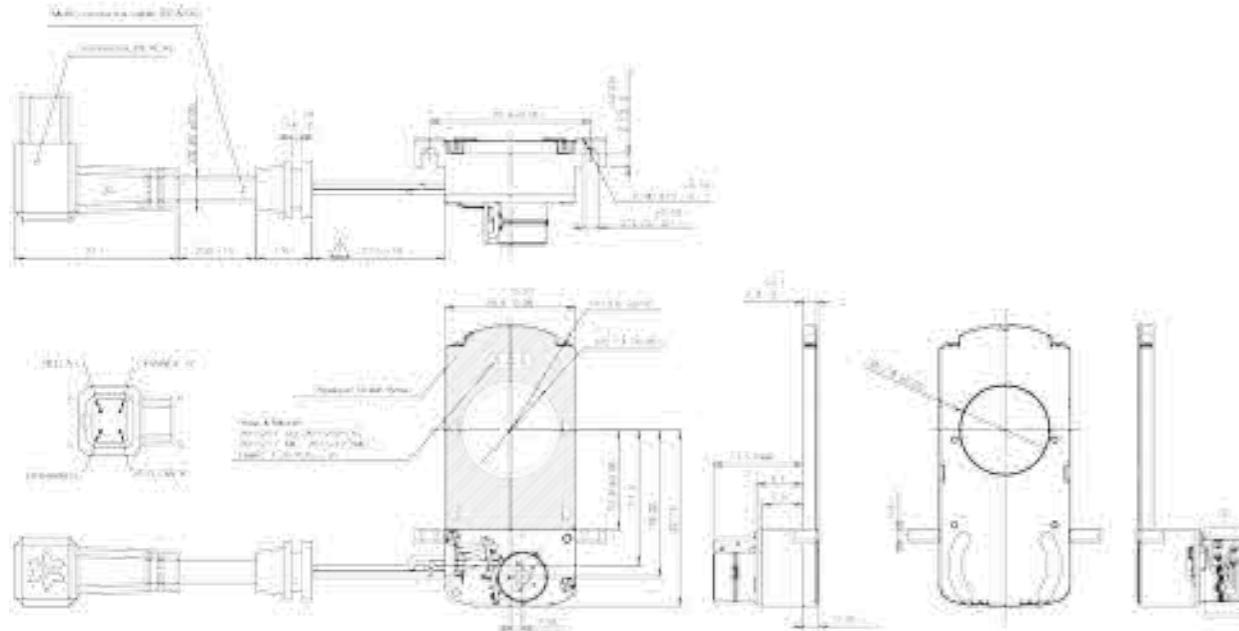

IR-Cut



unit	AOF0700029	AOF0800019	AOF0800093	AOF0800119	AOF0800127	AOF0800129	PSR0500010
	PE317	PE148	PE246	PE286	PE298	PE299	PE004
Electrical Characteristic							
Voltage	V	3.5~5	3.6	3.6~5.0	3.5~5.0	3.6~5.0	3.0~4.5
Driving Voltage	V	3.3	3.3	3.3	3.3	3.3	3.3
Resistance	Ω	25	25	25	25	20	25
Main Characteristic							
Engine Type	Solenoid						
Driving Mode	-	-	-	-	-	-	-
Aperture Diameter	mm	7*7	8*8	8*8	7*7	8*8	8*8

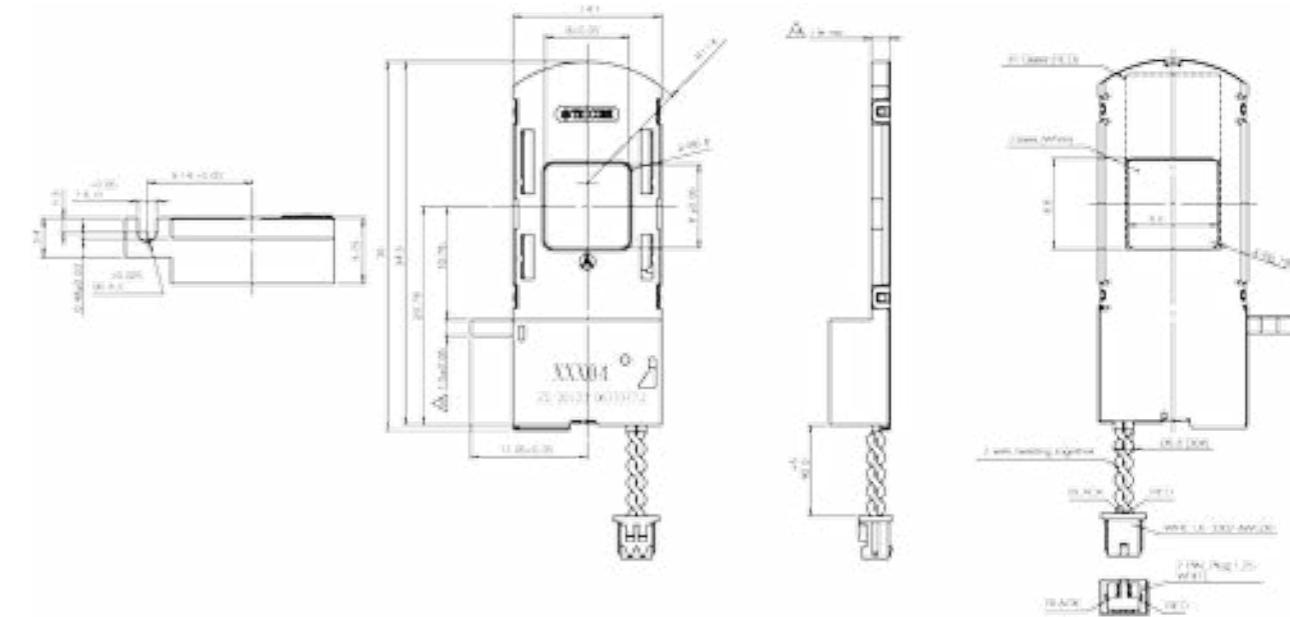


85 OPTICAL PART

IR-Cut

(PLUG-IN TYPE)



unit	PSR3200011	PSR3000017					
	PE037	PE053					
Electrical Characteristic							
Voltage	V	3.0~5.0	3.5				
Driving Voltage	V	3.3	3.3				
Resistance	Ω	25	25				
Main Characteristic							
Engine Type	Solenoid	Solenoid					
Driving Mode	-	-					
Aperture Diameter	mm	7.2	6.5				

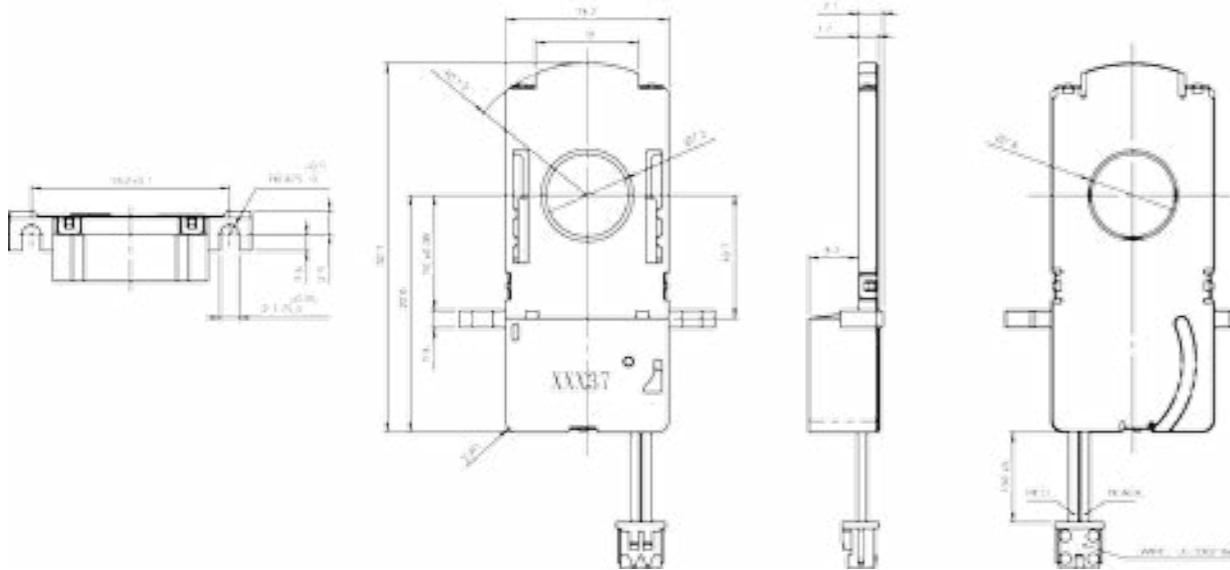


OPTICAL PART

IR-Cut

(SWING TYPE)




unit	AOF0700004	AOF0800100					
	PE127	PE258					
Electrical Characteristic							
Voltage	V	4.0	3.0				
Driving Voltage	V	3.3	-				
Resistance	Ω	25	15				
Main Characteristic							
Engine Type	Solenoid	Solenoid					
Driving Mode	-	-					
Aperture Diameter	mm	6.8	6.8				

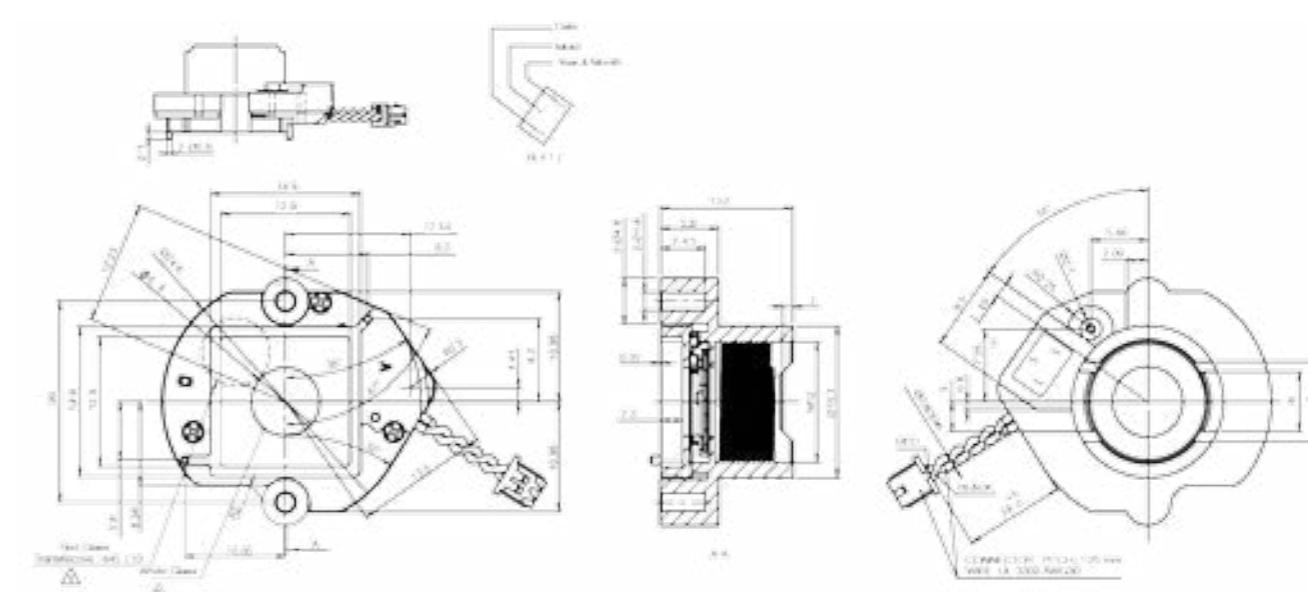

**87 OPTICAL PART
IR-Cut**




unit	AOF140001	PE232
Electrical Characteristic		
Voltage	V	3.0~5.0
Driving Voltage	V	3.3
Resistance	Ω	20
Main Characteristic		
Engine Type	Stepping Motor	
Driving Mode	2-2	
Aperture Diameter	mm	12.4*15.8

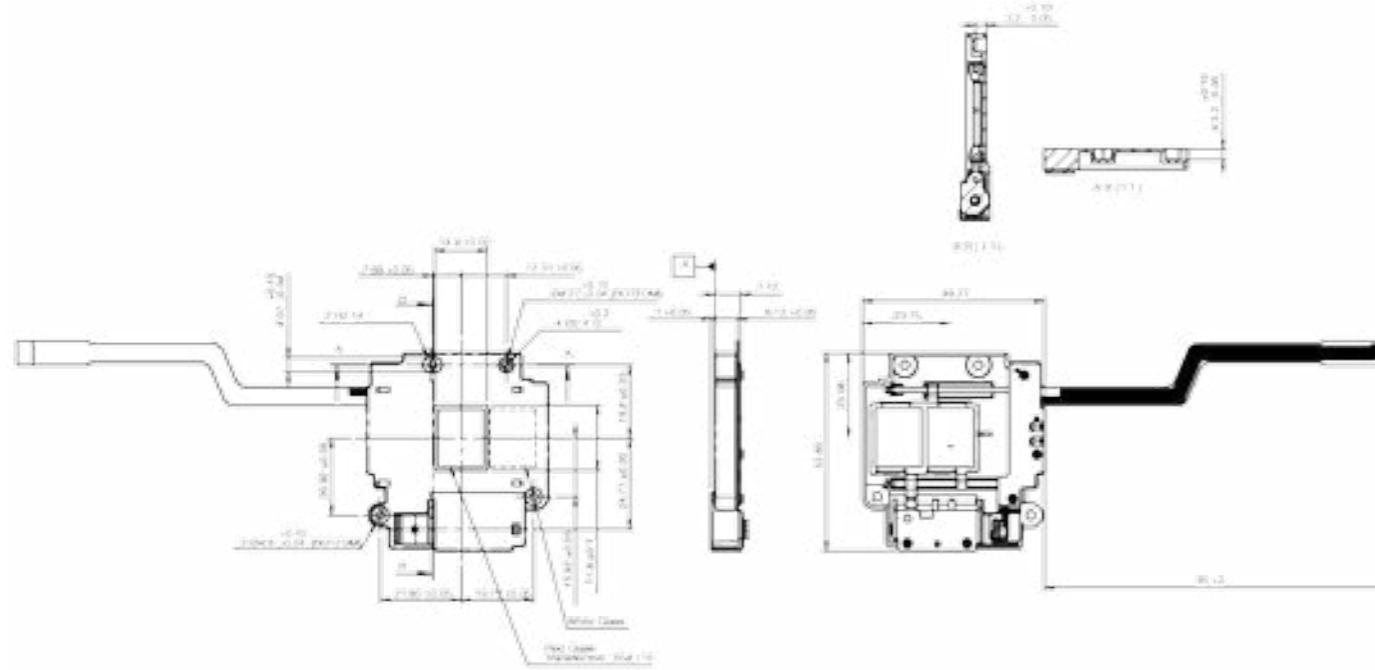

**OPTICAL PART
IR-Cut**




unit	PSR320008	PE022
Electrical Characteristic		
Voltage	V	6
Driving Voltage	V	-
Resistance	Ω	60
Main Characteristic		
Engine Type	Solenoid	
Driving Mode	-	
Aperture Diameter	mm	6.6

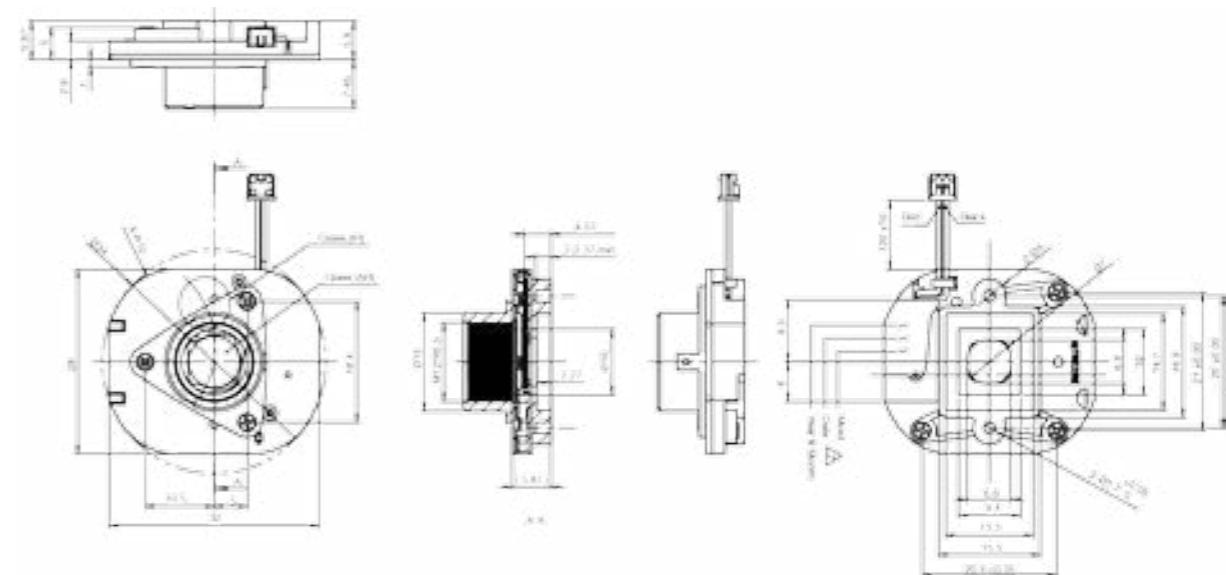

IRIS & IR-Cut (TWIN ENGINE TYPE)




unit	PSI4400010	PSI1300005	PSI0800029				
	DE018	DE104	DG005X				
Electrical Characteristic							
Max. Open Voltage V	3.0	3.0	3.0				
Min. Close Voltage V	0.5	0.5	0.5				
Driving Voltage V	6	6	6				
Braking Resistance Ω	190	120	190				
Driving Resistance Ω	855	120	855				
Main Characteristic							
Engine Type	Solenoid	Solenoid	Solenoid				
Driving Mode	-	-	-				
Aperture Diameter mm	7.0	13.6	8.0				

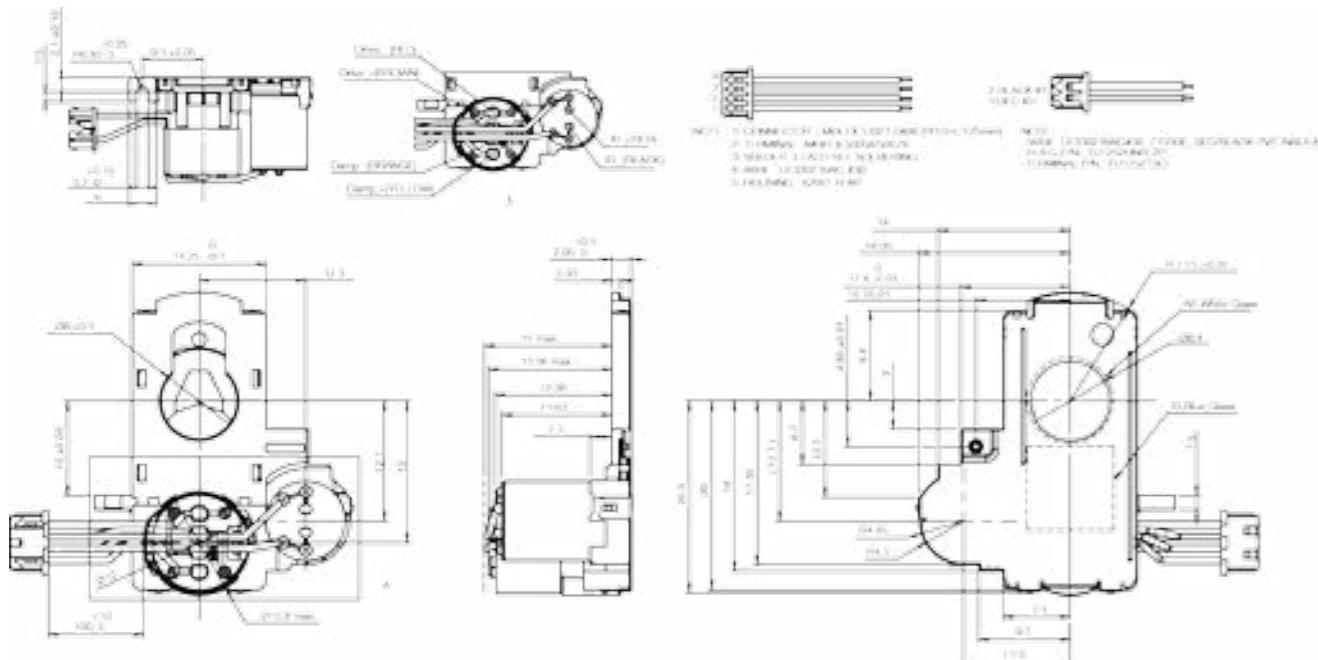

IRIS & IR-Cut (TWIN ENGINE TYPE)





unit	AON0800007	AON0800008	AON0800010				
	PI032X	PI033X	PI040X				
Electrical Characteristic							
Voltage V	3.3	3.3	3.3				
Driving Voltage V	3.3	3.3	3.3				
Resistance Ω	28.5	28.5	28.5				
Main Characteristic							
Engine Type	Solenoid	Solenoid	Solenoid				
Driving Mode	2-2	2-2	2-2				
Aperture Diameter mm	8.0	8.0	6.9				

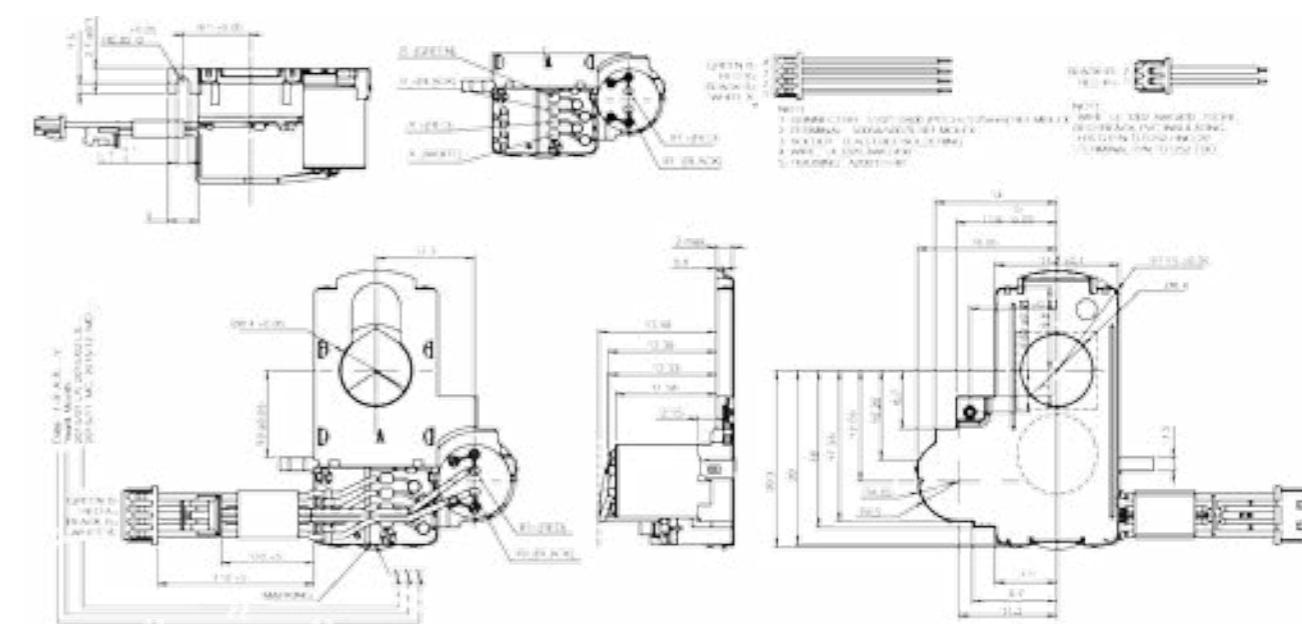

Thermal Shutter



unit	AHB160001	AHB120004				
	SU040	SU055				
Electrical Characteristic						
Voltage	V	3.3	3.3			
Resistance	Ω	13	13			
Main Characteristic						
Motor Type		Rotary Solenoid	Rotary Solenoid			
Driving Mode		-	-			
Shutter Speed	ms	40	40			
Aperture Diameter	mm	13.0*15.6	11.7*9.75			

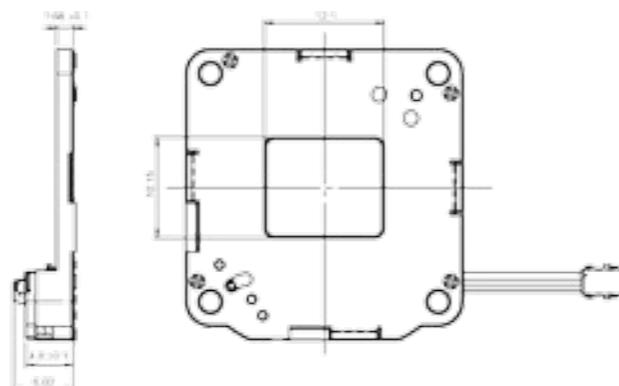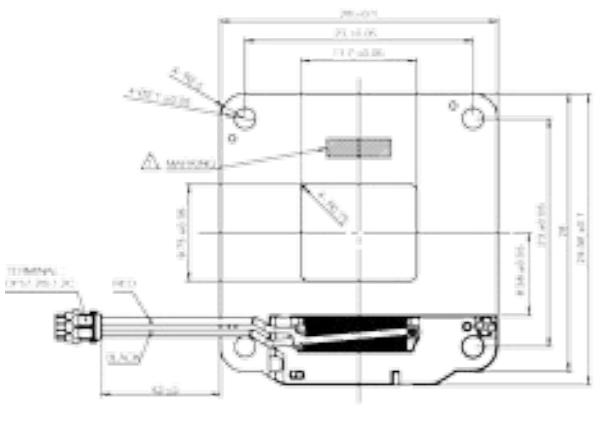

AUTOMOTIVE PART




AUTOMOTIVE PART | Axial

Stepping Motor




	unit	SRA3516001	SRA3516002	SRA3519001	SRA3519002	SRA4222001	
Electrical Characteristic							
Nominal Voltage	V	12	12	12.8	12.8	24	
Operating Range	V	9~16	9~16	9~16	9~16	22~26	
Coil Resistance	Ω	10	6	8	8	12	
Storage Temperature Range	°C	-40~120	-40~120	-40~120	-40~120	-25~80	
Operating Temperature Range	°C	-40~105	-40~105	-40~105	-40~105	0~50	
Step Angle	%/Step	3.75	7.5	15	15	11.25	
Nominal Frequency	PPS	600	660	300	300	300	
Max. Starting Frequency	PPS	-	-	450	450	450	
Output Force	kg	>7.0	>180	-	-	-	
Pull-in Torque	mNm	-	17.65	14.70	14.70	44.12	
Pull-out Torque	mNm	-	22.55	17.65	-	63.74	

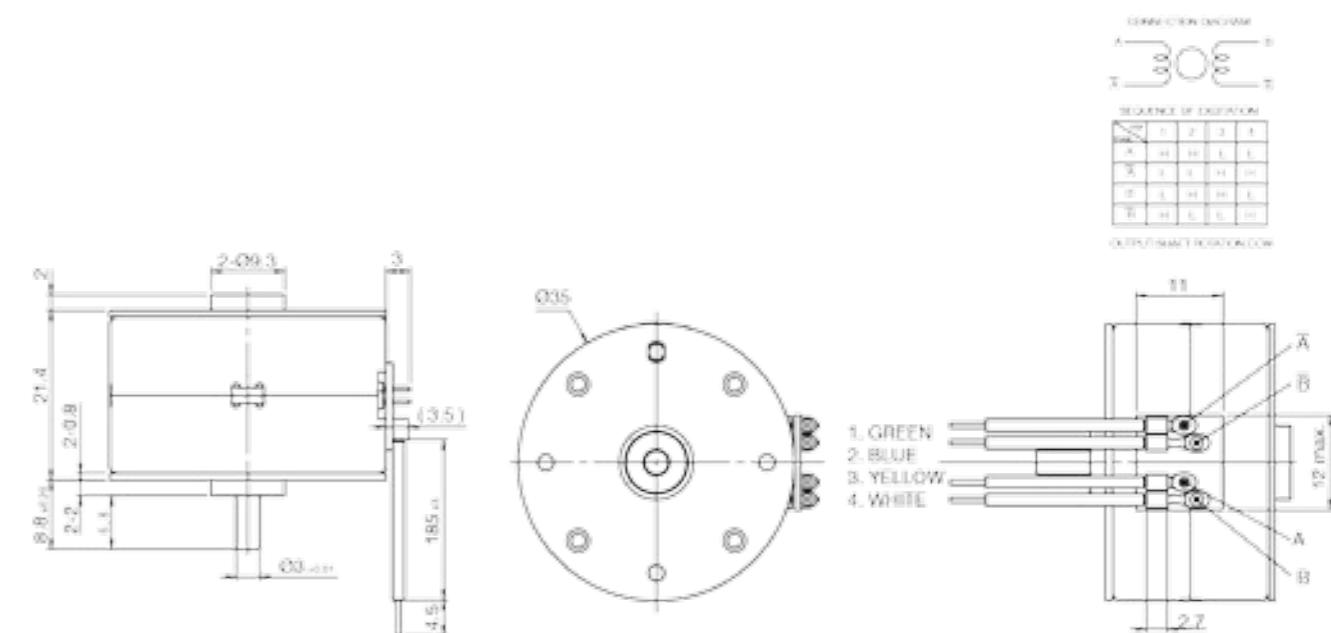

Stepping Motor




unit	SRA4226001							
Electrical Characteristic								
Nominal Voltage	V	12.8						
Operating Range	V	9~16						
Coil Resistance	Ω	29						
Storage Temperature Range	$^{\circ}\text{C}$	-40~120						
Operating Temperature Range	$^{\circ}\text{C}$	-40~105						
Step Angle	%/Step	11.25						
Nominal Frequency	PPS	160						
Max. Starting Frequency	PPS	-						
Push Force	kg	2.0						

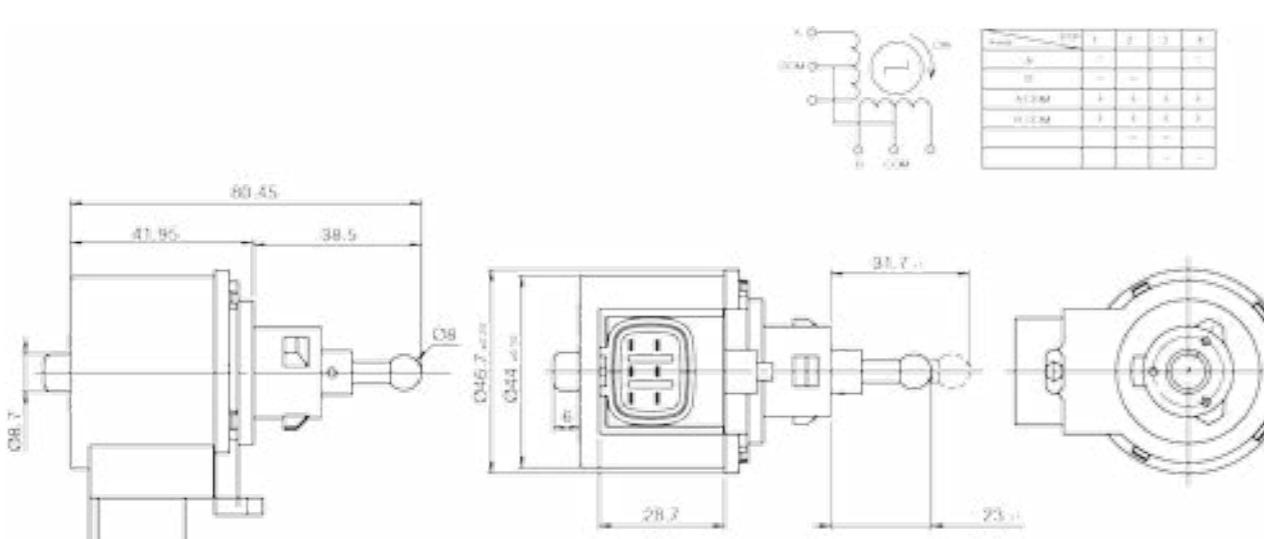

Stepping Motor



unit	SRG3519002	SRG3519005						
Electrical Characteristic								
Nominal Voltage	V	24	12					
Operating Range	V	-	9~16					
Coil Resistance	Ω	38	8					
Storage Temperature Range	$^{\circ}\text{C}$	-10~60	-40~120					
Operating Temperature Range	$^{\circ}\text{C}$	-20~70	-40~100					
Step Angle	%/Step	15	15					
Nominal Frequency	PPS	250	300					
Max. Starting Frequency	PPS	400	450					
Push Force	kg	-	-					

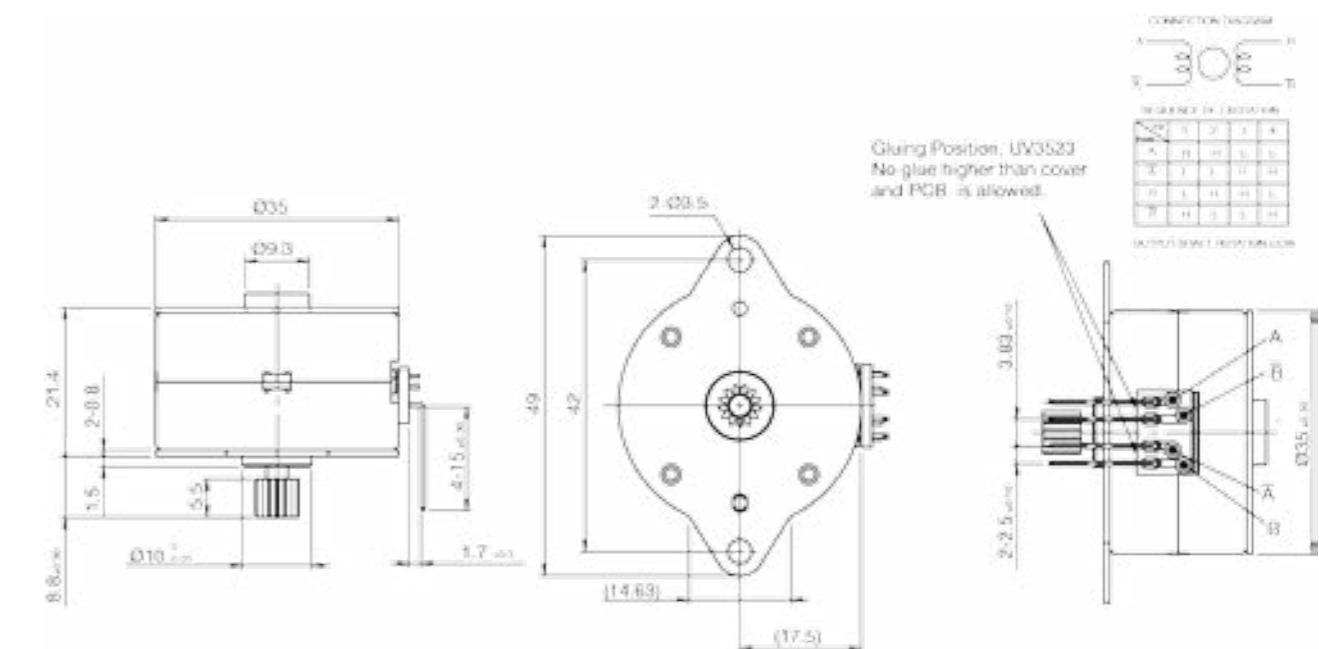


Stepping Motor





unit	SRL3519014	SRL3519018						
Electrical Characteristic								
Nominal Voltage V	12	12						
Operating Range V	9~16	9~16						
Coil Resistance Ω	8	8						
Storage Temperature Range °C	-40~120	-40~120						
Operating Temperature Range °C	-40~105	-40~105						
Step Angle /%Step	15	15						
Nominal Frequency PPS	400	400						
Max. Starting Frequency PPS	400	400						
Push Force kg	5.0	5.0						

Stepping Motor

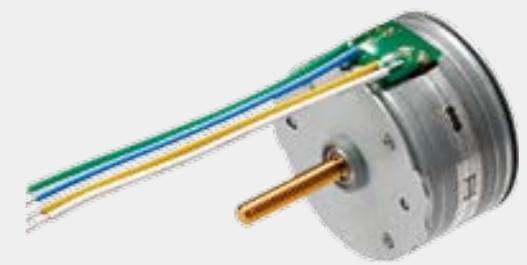


unit	SRL3524005							
Electrical Characteristic								
Nominal Voltage V	12.8							
Operating Range V	9~16							
Coil Resistance Ω	8							
Storage Temperature Range °C	-40~120							
Operating Temperature Range °C	-40~105							
Step Angle /%Step	15							
Nominal Frequency PPS	300							
Max. Starting Frequency PPS	450							
Pull-in Torque mNm	14.70							

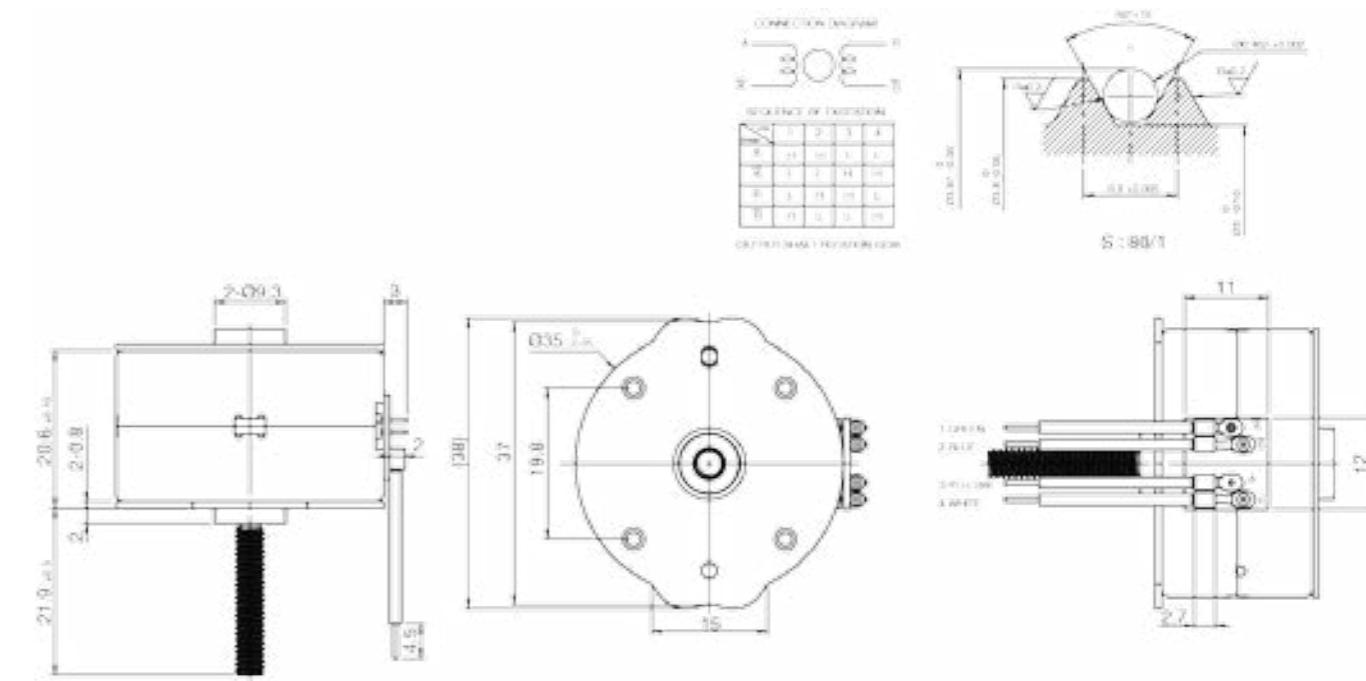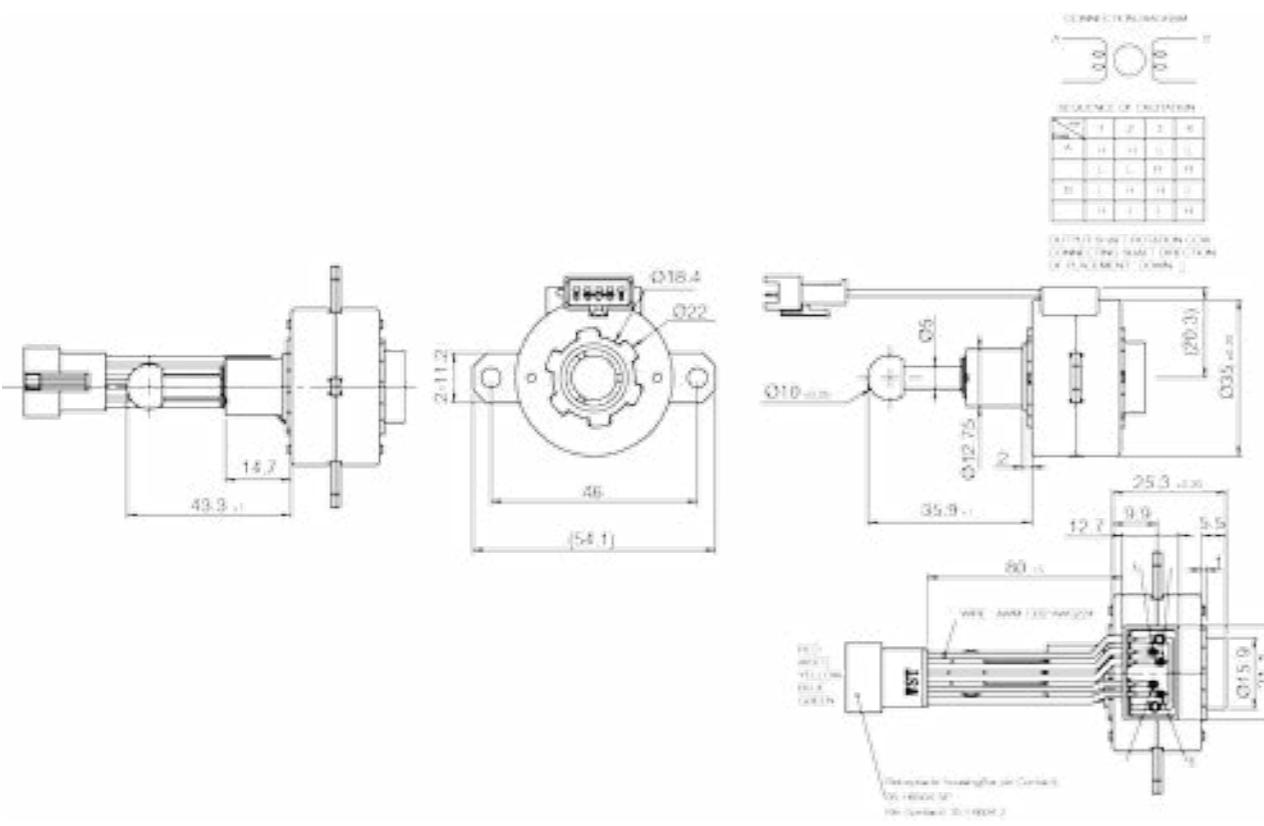

99 AUTOMOTIVE PART | Leadscrew

Stepping Motor


unit	SRL3524001	SRL3524003	SRL3524007	SRL3524013	SRL3524014	SRL3524015	
Electrical Characteristic							
Nominal Voltage V	12.8	12.0	12.8	12.8	12.8	12.8	
Operating Range V	9.0~16.0	9.0~16.0	9.0~16.0	9.0~16.0	9.0~16.0	9.0~16.0	
Storage Temperature Range °C	-40~120	-25~100	-40~120	-40~120	-40~120	-40~120	
Operating Temperature Range °C	-40~105	-25~85	-40~105	-40~105	-40~105	-40~105	
Step Angle %/Step	15	15	15	15	15	15	
Nominal Frequency PPS	400	450	400	400	400	400	
Max. Starting Frequency PPS	400	450	400	400	400	400	
Push Force kg	3.0	10.0	3.0	3.0	3.0	3.0	

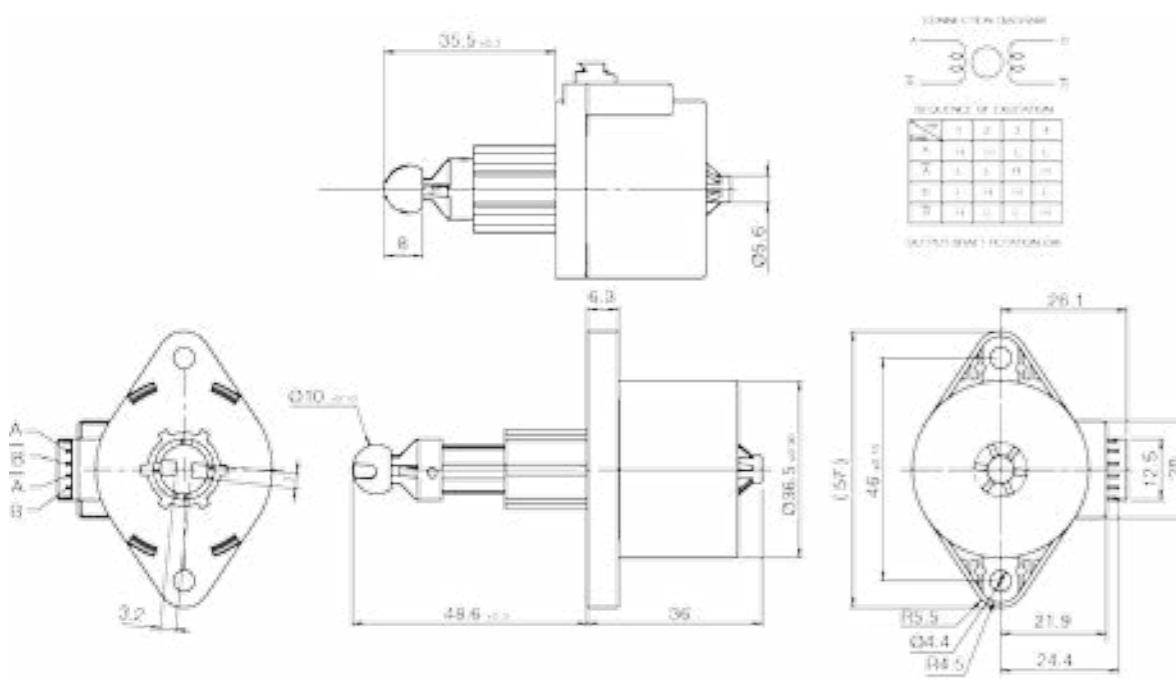

AUTOMOTIVE PART | Leadscrew

Stepping Motor

unit	SRL3524017	SRL3524023	SRL4233001	
Electrical Characteristic				
Nominal Voltage V	12.8	12.8	12.8	
Operating Range V	9.0~16.0	9.0~16.0	9.0~16.0	
Storage Temperature Range °C	-40~120	-40~120	-40~120	
Operating Temperature Range °C	-40~105	-40~105	-40~105	
Step Angle %/Step	15	15	11.25	
Nominal Frequency PPS	300	400	160	
Max. Starting Frequency PPS	400	400	160	
Push Force kg	3.0	3.0	2.0	

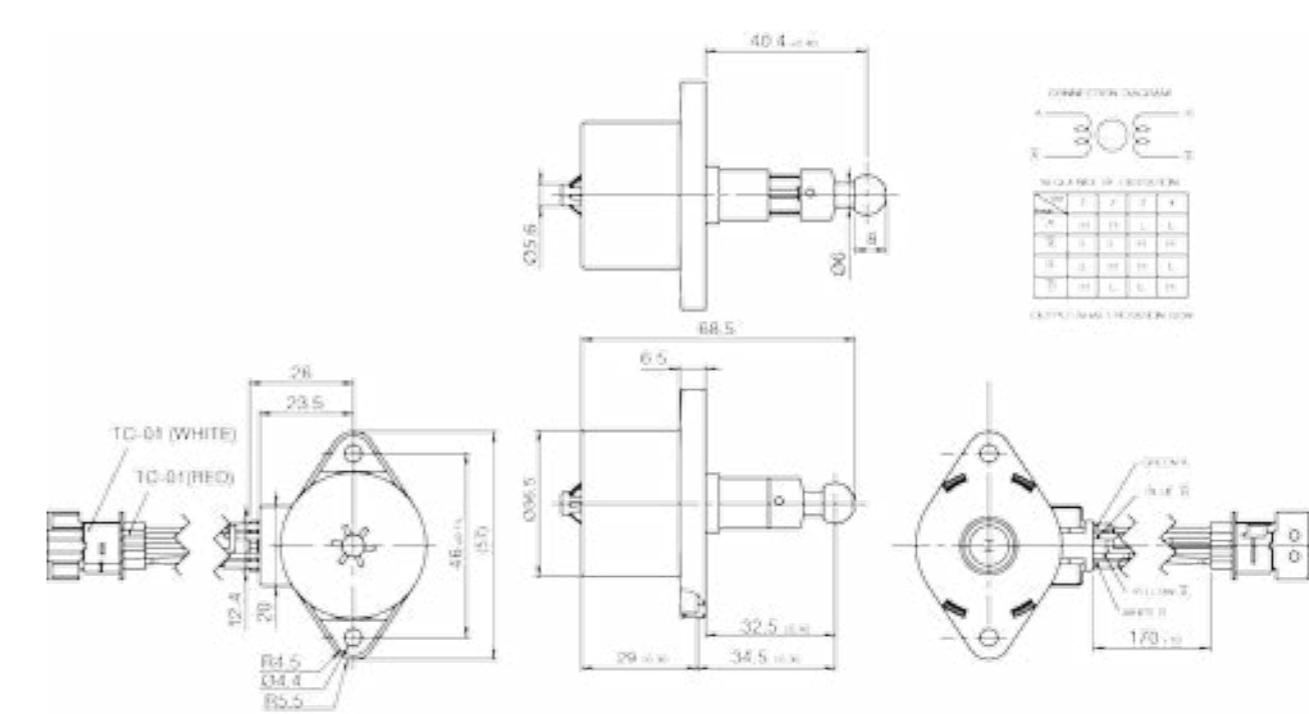


SECURITY
AUTOMOTIVE
MEDICAL
AUTOMATION




TRICORE INNOVATION

Gear Coreless Motor

13mm | Planetary Gearhead

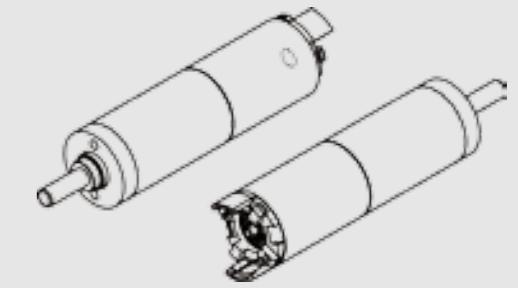


unit	BEG1322001						
Standard Operating Conditions							
Nominal Voltage	V	6.0					
Operating Range	V	6.0~8.4					
Operating Temperature Range	°C	-10~+60					
Storage Temperature Range	°C	-20~+80					
Direction of Rotation	CW&CCW						
Motor Position	All Direction						
Electrical Characteristic							
No-Load Current	mA	40					
No-Load Speed	rpm	135					
Stall Torque	mNm	63.74					
Starting Current	mA	500					
Coreless Motor Electrical Characteristic							
No-Load Current	mA	15					
No-Load Speed	rpm	8500					
Starting Voltage	V	1.0					
Starting Current	mA	200					
Rotor Resistance	Ω	28					
Insulation Resistance	MΩ/min	1					

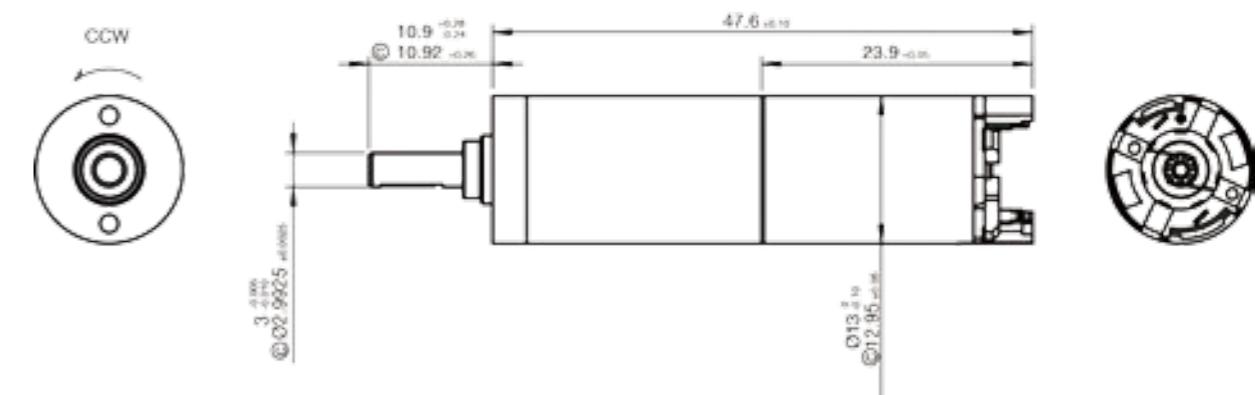


Gear Coreless Motor


17mm | Metal Gearhead

Application | Smart Lock


unit	BCP1718001					
Standard Operating Conditions						
Nominal Voltage	V	6.0				
Operating Range	V	5.5~6.5				
Operating Temperature Range	°C	-10~+60				
Storage Temperature Range	°C	-20~+80				
Direction of Rotation		CW&CCW				
Motor Position		All Direction				
Electrical Characteristic						
No-Load Current	mA	150				
No-Load Speed	rpm	67.5				
Stall Torque	mNm	1274.86				
Starting Voltage	V	1.0				
Starting Current	mA	3800				
Reduction Ratio		1:281				
Mechanical Noise	dB	60				

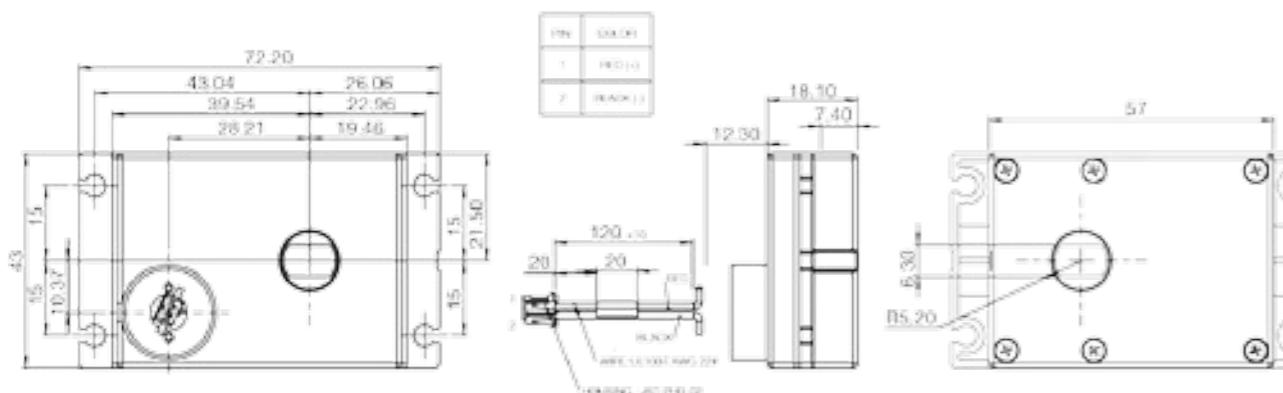**Servo Gear Motor**

12mm | Metal Gearhead


Application | Smart Lock

unit	HQA0324001					
Standard Operating Conditions						
Nominal Voltage	V	4.8	6.0			
Operating Range	V	4.8~6.0	4.8~6.0			
Operating Temperature Range	°C	-20~+60	-20~+60			
Storage Temperature Range	°C	-10~+50	-10~+50			
Electrical Characteristic						
No-Load Current	mA	60	80			
No-Load Speed	rpm	77	100			
Stall Torque	mNm	0.17	0.21			
Stall Current	mA	550	700			
Limit Angle	°	360	360			
Reduction Ratio		1:150	1:150			
Weight	g	19	19			


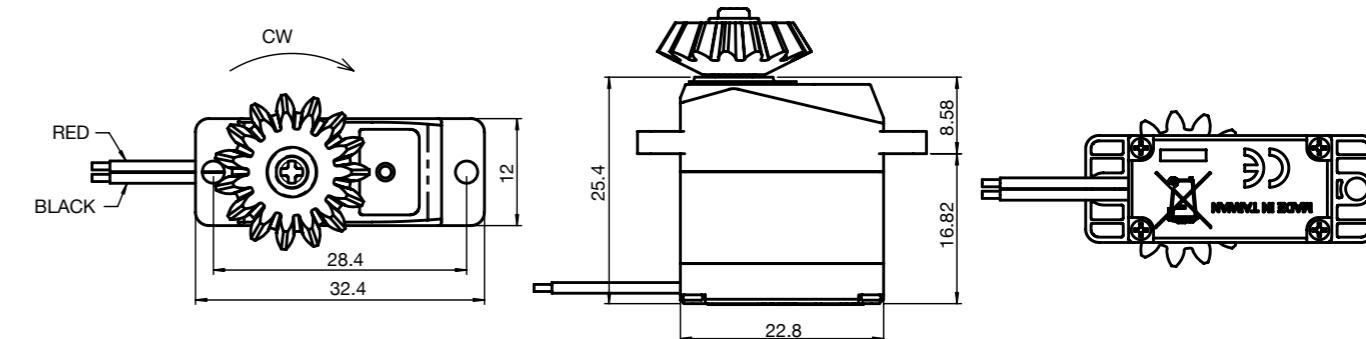


Soleniod


IS19 series

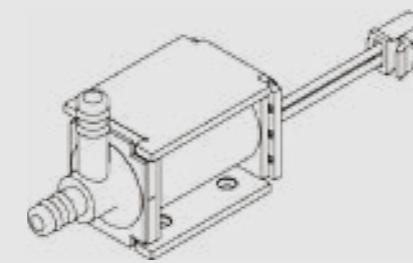Application | Blood Pressure Meter

unit	TVC0300001					
Parameters						
Nominal Voltage	V	24				
Medium		Air				
Resistance	Ω	210				
Min. Starting Voltage	V	≤21.6				
Exhaust Velocity		Reduce 300 mmHg to 15mmHg at 500 cc of pneumatic cylinder : ≤ 6.0s				
Others						
Life Test		300,000 times (DC24V; 1cycle: on 0.5s, off 0.5s)				
Working Environment		0~45°C, 40-80%RH				

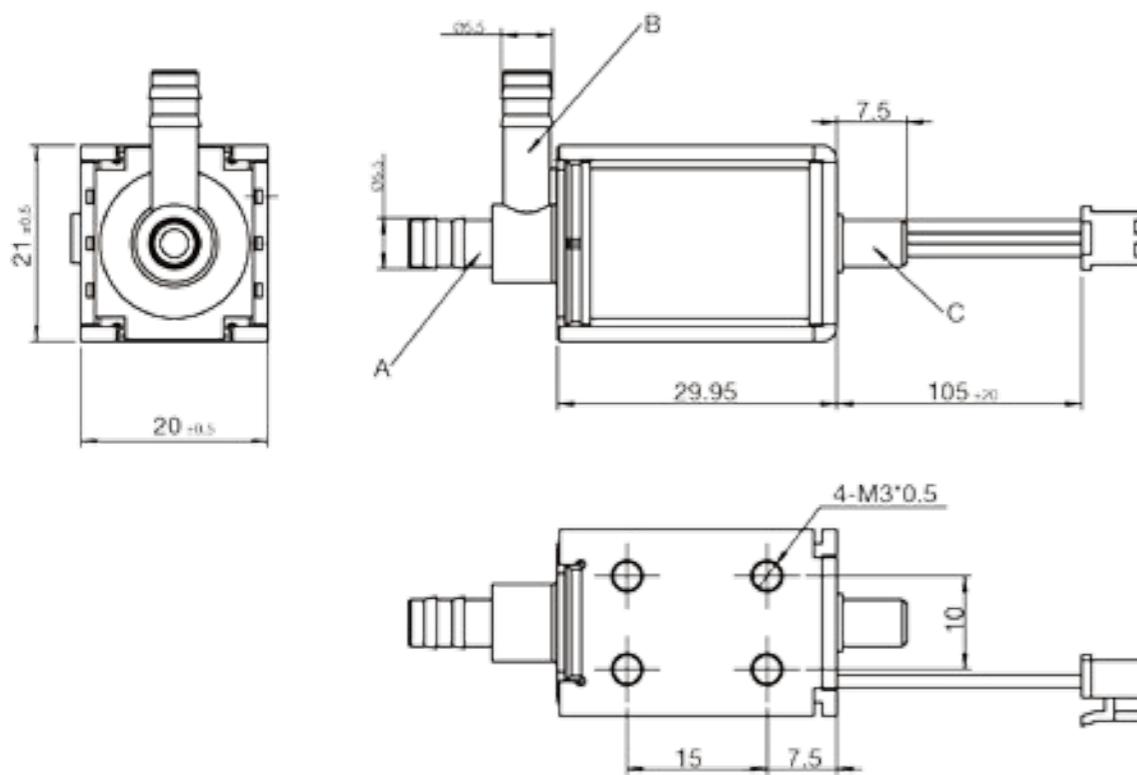**Soleniod****Application |** Automotive

unit	PSO3100001					
Standard Operating Conditions						
Nominal Voltage	V	12				
Operating Range	V	10~15				
Operating Temperature Range	°C	-40~135				
Storage Temperature Range	°C	-40~135				
Operating Stroke	mm	4				
Resistance	Ω	22				
Insulation Resistance	Ω/min	10M				
Withstand Voltage Test	AC/V	500				
Attraction	gf/min	250				

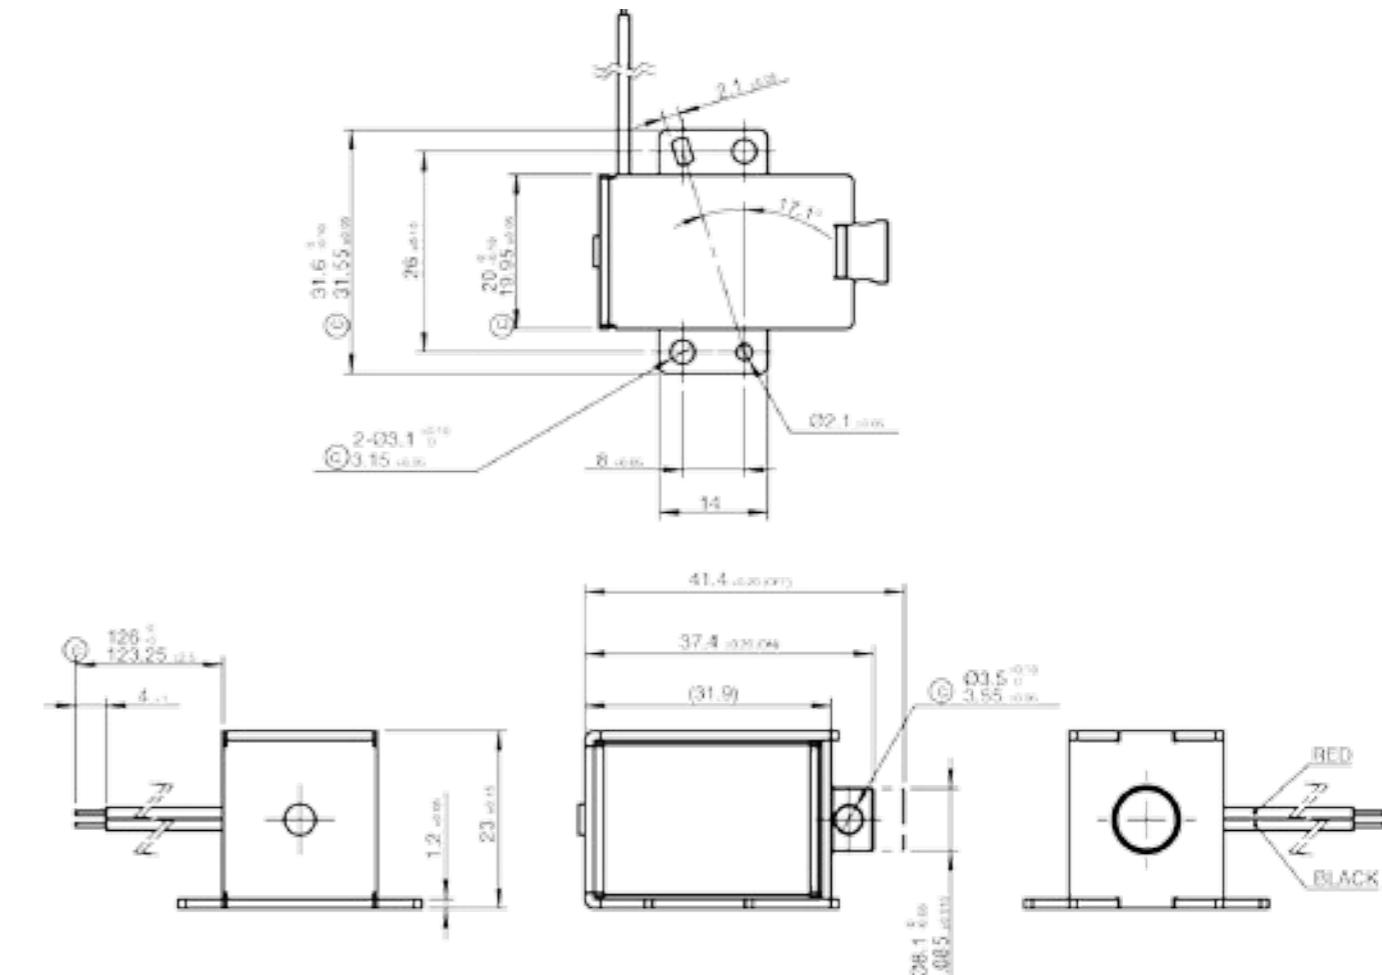


107 TRICORE INNOVATION


AFS Series

(Adaptive Front-lighting System)

Application | Automotive

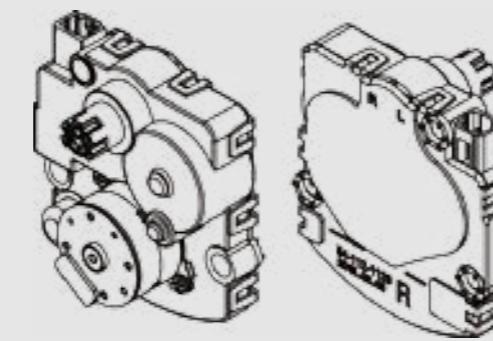

unit	AFS3004005	AFS3004006						
Standard Operating Conditions								
Nominal Voltage	V	12	12					
No. of Phase	Phase	2	2					
Max. Starting Frequency	pps	250	250					
Operating Temperature Range	°C	-40~80	-40~80					
Storage Temperature Range	°C	-40~80	-40~80					
Operating Angle	°	34	34					
Resolution of Operating Angle	°/STEP	1/10	1/10					
Torque	mNm	980.66	980.66					
Dielectric Strength	V	200/AC	200/AC					
Insulation Resistance	Ω	1M	1M					
Mechanical Noise	dB	65	65					

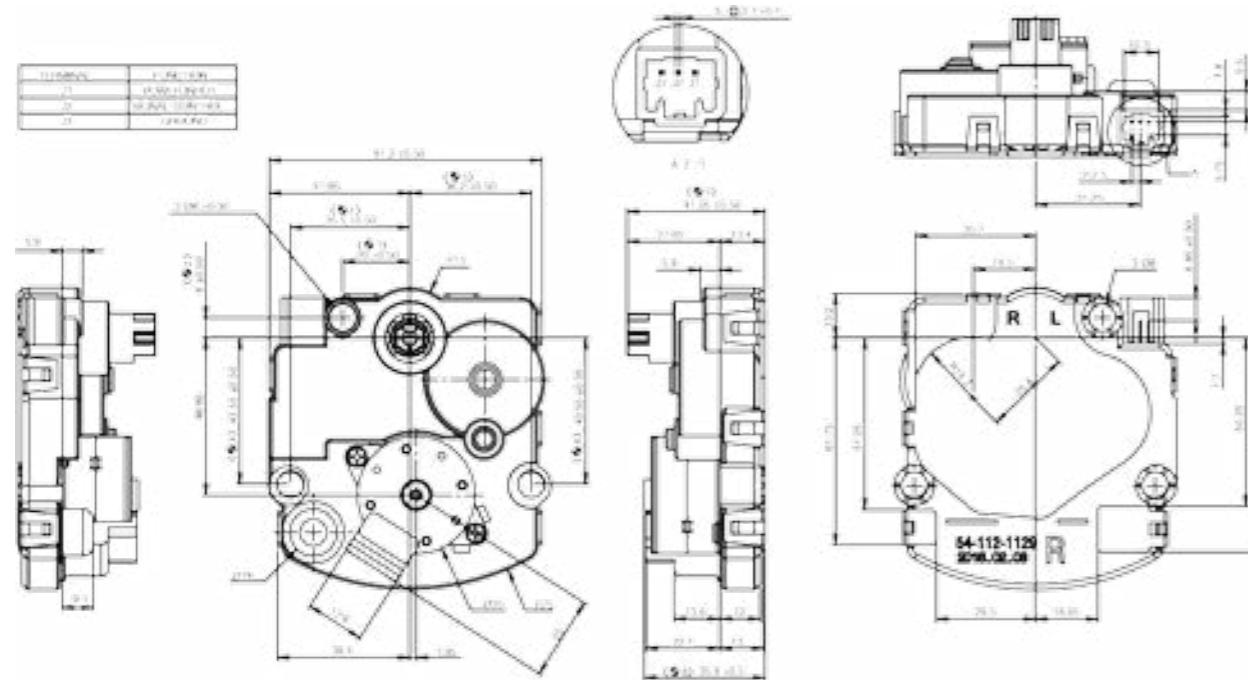


108 TRICORE INNOVATION


AFS Series

(Adaptive Front-lighting System)

Application | Automotive

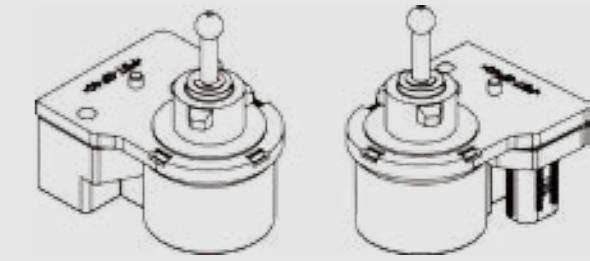

unit	AFS3005008							
Standard Operating Conditions								
Nominal Voltage	V	31						
Push Force	Kg	>2						
Vehicle Bus		LIN Bus						
Operating Stroke	mm	10						
Dielectric Strength	V	200/AC						
Insulation Resistance	Ω/min	1M						
Axial Resistance to Assembly of Reflector	Kg	25						
Max. Assembly Speed	mm/min	300						

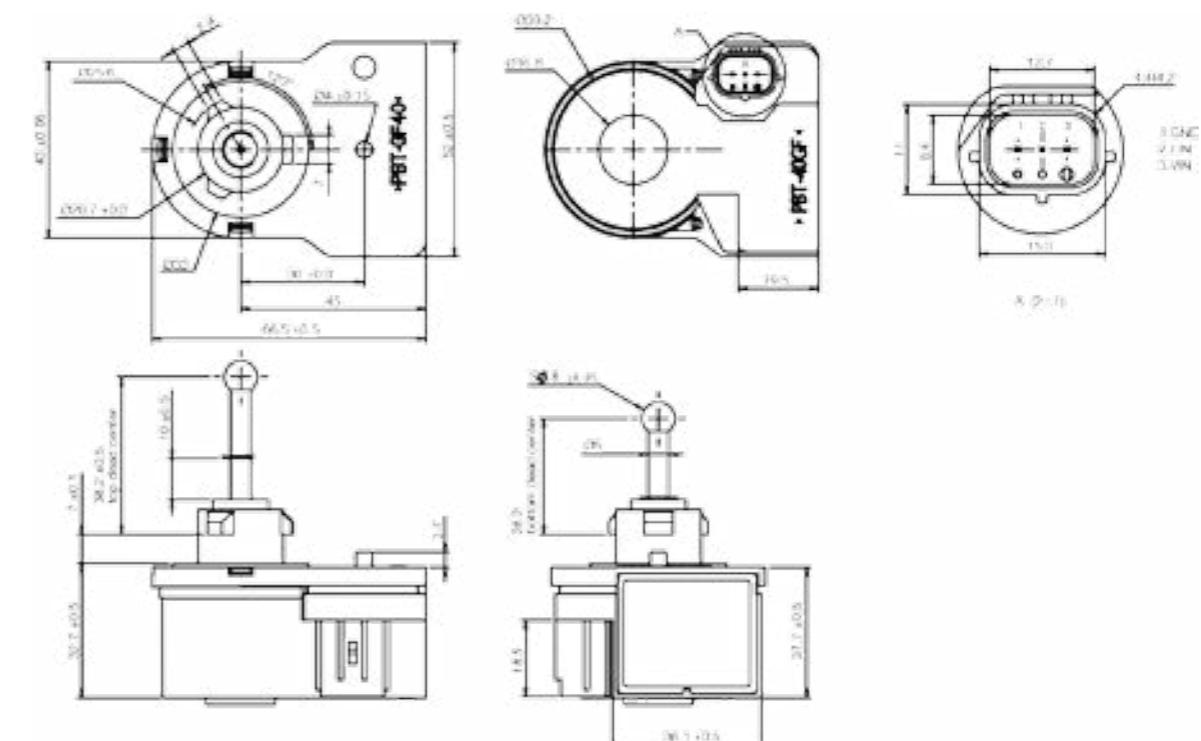

Quality Certification

In order to make quality the core of our management, we consider the customer's focus as the core in improving the quality and efficiency in our work performance. To sustain the insistence of quality, TRICORE's Quality Control department applies a variety of exclusive measuring work stations as an educational training platform. With this platform, we constantly carry out intensive educational training programs and assessments to nurture creative technical personnel and promote analysts' ability in product measurement in order to achieve superior quality, meeting and exceeding customers' expectations on products' quality requirements.



1999 We granted ISO9002:1999 international quality system certification.

2002 Passed the ISO9001 in 2002.

2003 ISO14001 in 2003.
We granted the SONY GP certification in 2003.

2004 We also granted OHSAS18001 certification in 2004.

2006 TS16949 certification in 2006.

2013 QC8000 certification in 2013.

2018 IATF 16949 certification in 2018.

ISO13485 is under applying.

